
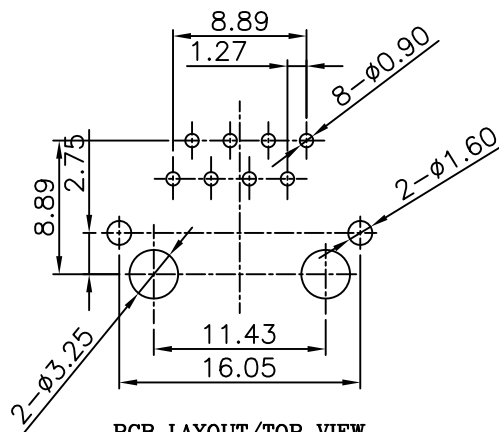
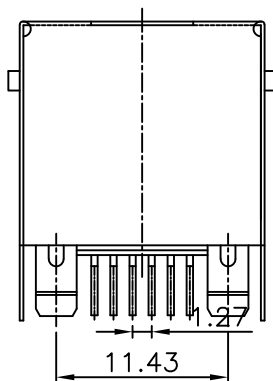
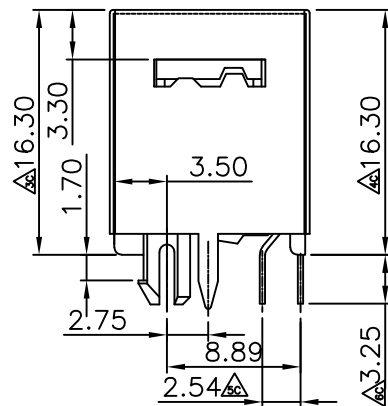


RoHS compliant



PCB LAYOUT/TOP VIEW

MATERIALS:

PLASTIC HOUSING: ENGINEERING THERMOPLASTIC
FLAMMABILITY RATING UL 94V-0.

CONTACTS: PHOSPHOR BRONZE

PLATING: GOLD PLATING OVER NICKEL IN CONTACT.
TIN PLATING OVER NICKEL IN SOLDER AREA.

SHIELDED: BRASS WITH NICKEL PLATED

Electrical:

- 1.Voltage Rating:125 Vac Rms.
- 2.Current Rating:4.5 Amp.
- 3.Contact Resistance:40 Milliohms Max.
- 4.Insulation Resistance:1000 Megohms Min @500 Vdc.
- 5.Dielectric Strength:1000 Vac Rms 60Hz, 1Min.

Mechanical:

- 1.Operating:750 Cycles Min.

Environmental:

- 1.Storage:-40°C To +85°C.
- 2.Operation:-20°C To +75°C.

Mates With Modular Plug Conforming To FCC Part 68, Subpart F.

PART NUMBER:

P/N 料号	DESCRIPTION 描述	MATER COLOR 材质	GOLD PLATING 电镀
RJ52G-8811-1011111	RJ45 8P8C 180° 黑色胶壳黑色支架	PBT	1U"
RJ52G-8811-1041111	RJ45 8P8C 180° 黑色胶壳黑色支架	PBT	6U"
RJ52G-8811-1041113	RJ45 8P8C 180° 黑色胶壳红色支架	PBT	6U"
RJ52G-8811-1041133	RJ45 8P8C 180° 红色胶壳红色支架	PBT	6U"

GENERAL TOLERANCE

.X	±0.35	X.°	±2°
.XX	±0.25	.X°	±1°
.XXX	±0.15	.XX°	±0.5°

DRAWN

Gene Li

2018/07/11

UNIT

MM

CHECKE

JH

SCALE

1:1

APPROVE

DRAWING NO

REV

A0

X-SHUN 东莞市祥舜电子科技有限公司
DONGGUAN X-SHUN ELECTRONIC TECHNOLOGY CO., LTD
TEL:+86 769 81885389 FAX:+86 769 81887859
E-Mail:sales@x-shun.com Http:www.x-shun.com

PART NO.

SEE TABLE

TITLE

RJ45 180° 8P8C W/SHIELD,W/EAR PCB JACK

PROJECT