
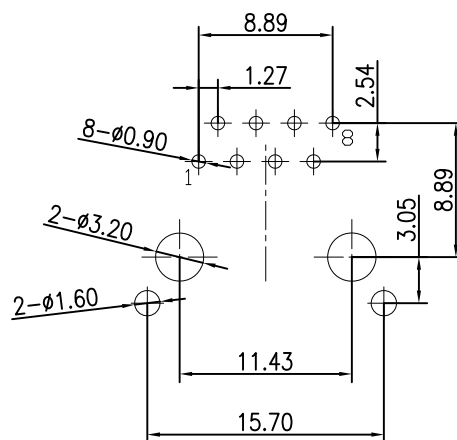
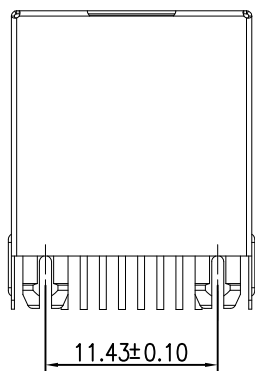
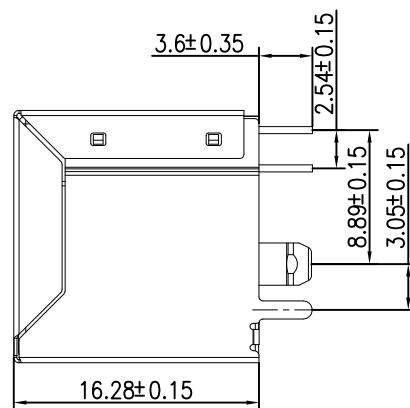


RoHS compliant



PC Board Layout

NOTES

MATERIAL

1. HOUSING MATERIAL : GLASS FILLED POLYESTER UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE Ø0.46mm.
3. PLATING : GOLD PLATING OVER NICKEL.
4. SHIELD : FU", 3U", 6U", 15U", 30", 50".

ELECTRICAL

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500V DC .
5. DIELECTRIC RESISTANCE : 1000V AC RMS 50Hz. 1MIN.

MECHANICAL

1. DURRABILITY : 750 CYCLES MIN.
2. PCB RETENTIONPRE-SOLDER : 1 LB MIN.

ENVIRONMENTAL:

1. STORAGE : -40℃~+85℃.
2. OPERATION : -40° C TO 85° C.

PART NUMBER:

P/N 料号	DESCRIPTION 描述	MATER COLOR 材质	GOLD PLATING 电镀
RJ52E-8811-110111R	5224S-8P8C-1X1 F3.05	PBT BLACK 黑	G/F"
RJ52E-8811-110117R	5224S-8P8C-1X1 F3.05	PBT BLUE 蓝	G/F"

GENERAL TOLERANCE

.X	±0.35	X.°	±2°
.XX	±0.25	.X°	±1°
.XXX	±0.15	.XX°	±0.5°

DRAWN

Gene Li

2016/10/22

UNIT

MM

CHECKE

SC

SCALE

1:1

APPROVE

DRAWING NO

REV

A0

X-SHUN 东莞市祥舜电子科技有限公司
DONGGUAN X-SHUN ELECTRONICTECHNOLOGY CO., LTD
TEL:+86 769 81885389 FAX:+86 769 81887859
E-Mail:sales@x-shun.com Http:www.x-shun.com

PART NO. SEE TABLE

TITLE 5224S 1X1 8P8C W/SHIELD F3.05 JACK