
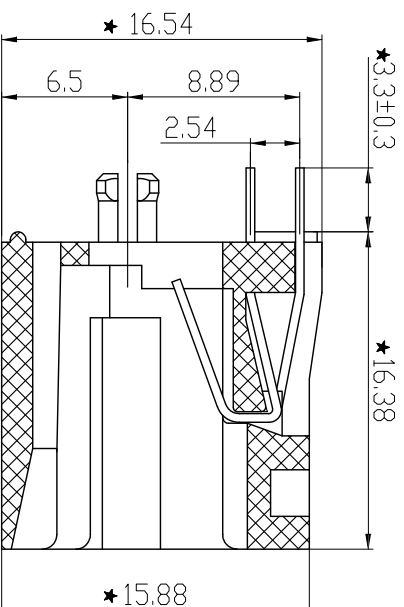


RoHS compliant

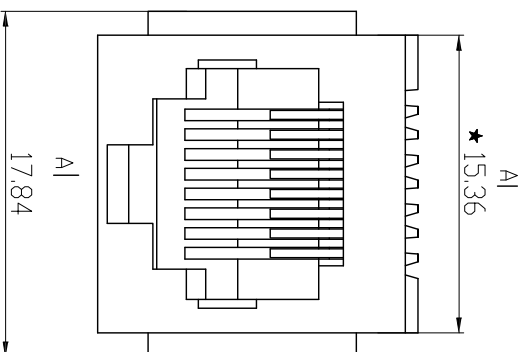

NOTES

MATERIAL

1.HOUSING MATERIAL
2.CONTACT MATERIAL
3.PLATING

- ! PBT/PA46 UL 94V-0.
- ! PHOSPHOR BRONZE Ø0.46mm.
- ! GOLD PLATING OVER NICKEL.
- ! FU, 3U, 6U, 15U, 30U, 50U.

ELECTRICAL

1.VOLTAGE RATING	: 125 VAC RMS.
2.CURRENT RATING	: 1.5 AMP.
3.CONTACT RESISTANCE	: 30 MILLIOHMS MAX.
4.INSULATION RESISTANCE	: 500 MEGOHMS MIN @ 500V DC

5. DIELECTRIC RESISTANCE



: 1000V AC RMS 50HZ. 1MIN.

MECHANICAL


1.DURRABILITY	: 750 CYCLES MIN.
2.PCB RETENTIONPRE-SOLDER	: 1 LB MIN.

ENVIRONMENTAL:

1.STORAGE	-40°C~+85°C
2.OPERATION	-40°C~+85°C

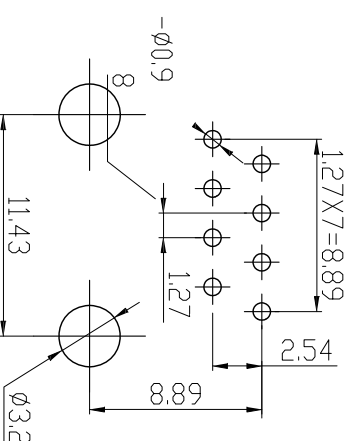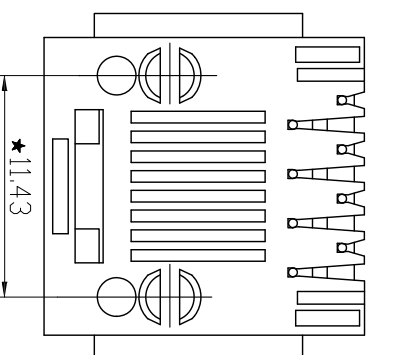

PC Board Layout

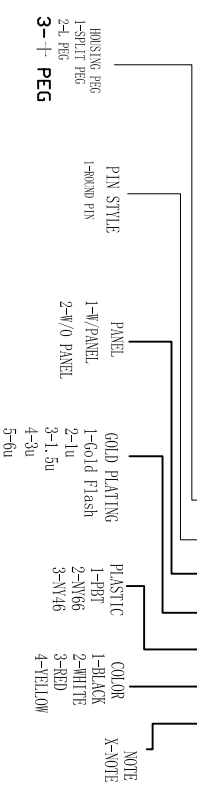

P/N:RJ52A-8811-111XXXX

					X-SHUN 东莞市祥舜电子科技有限公司 DONGGUAN X-SHUN ELECTRONIC TECHNOLOGY CO., LTD TEL:+86 769 81863589 FAX:+86 769 81867859 E-Mail:sales@x-shun.com Http://www.x-shun.com						
				GENERAL TOLERANCE	DRAWN	Gene Zi	2015/05/12	UNIT	MM		
			.X	±0.35 X° ±2°	CHECKE	SC		SCALE	1:1		
			.XX	±0.25 X° ±1°							
A0		NEW DESIGN	2015/05/12		.XXX	±0.15 XX° ±0.5°				PART NO.	RJ52A-8811-11XXXX
				PROJECT	APPROVE			SHEET		TITLE	5222-1X1-8P8C-E
REV	ECON NO	DESCRIPTION	DATE	SIGNATURE		DRAWING NO		REV	A0		