
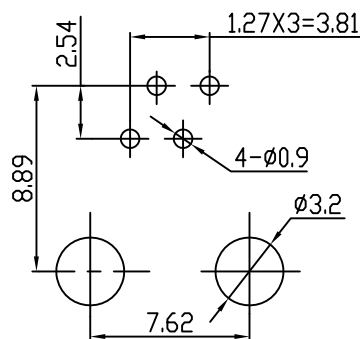
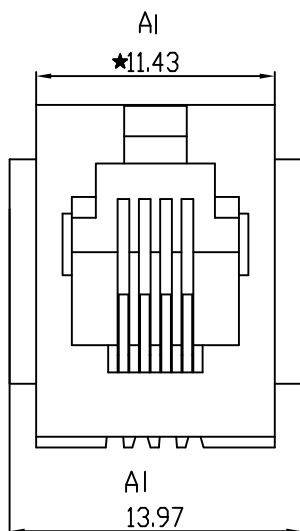
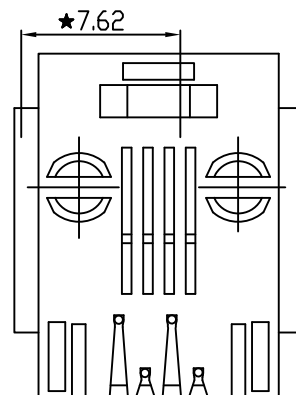


RoHS compliant

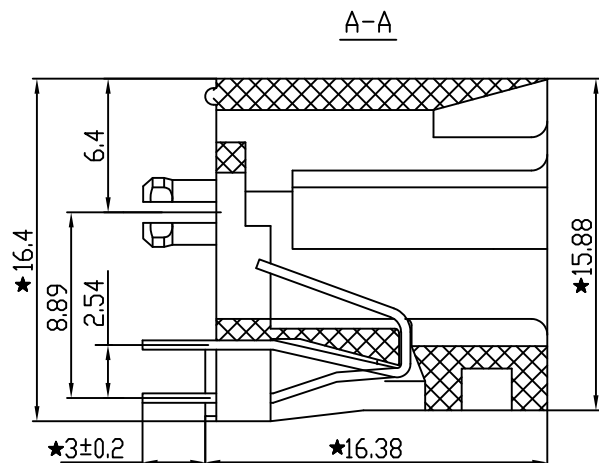

PC Board Layout

NOTES:

ELECTRICAL:

1. VOLTAGE RATING: 125 VAC RMS.
2. CURRENT RATING: 1.5 AMP.
3. CONTACT RESISTANCE: 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 500 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH: 1000 VAC RMS 50Hz or 60Hz, 1MIN.

MECHANICAL:

1. INSERT MATERIAL: UL94V-0.
2. CONTACT MATERIAL: DIAMETER 0.45MM PHOSPHOR BRONZE
GOLD PLATING OVER NICKEL.
3. MATING/UNMATING FORCE: 2.2KG.F MAX.
4. RETENTION STRENGTH: 7.7KG.F MIN BETWEEN JACK AND PLUG.
5. OPERATING LIFE: 750 CYCLES MIN.


ENVIRONMENTAL:

1. STORAGE: -10°C ~ +40°C RELATIVE HUMIDITY<70%.
2. OPERATION: -40°C ~ +85°C.

Remark:

1. The mark with★ is the key inspection dimension for QC

P/N:RJ52A-4411-111XXXX

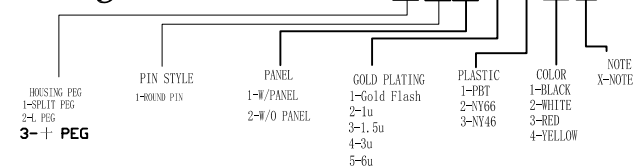

				GENERAL TOLERANCE		DRAWN	Gene Li		2015/06/21	UNIT	MM	X-SHUN 东莞市祥舜电子科技有限公司 DONGGUAN X-SHUN ELECTRONIC TECHNOLOGY CO., LTD TEL:+86 769 81885389 FAX:+86 769 81887859 E-Mail:sales@x-shun.com Http:www.x-shun.com	
				.X	±0.35 X.° ± 2°	CHECKE	SC			SCALE	1:1	PART NO. RJ52A-4411-111XXXX	
				.XX	±0.25 .X° ± 1°								
A0		NEW DESIGN	2015/06/21		.XXX	±0.15 .XX° ± 0.5°	APPROVE			SHEET			
REV	ECN NO	DESCRIPTION	DATE	SIGNATURE	PROJECT 		DRAWING NO				REV	A0	