


RoHS compliant

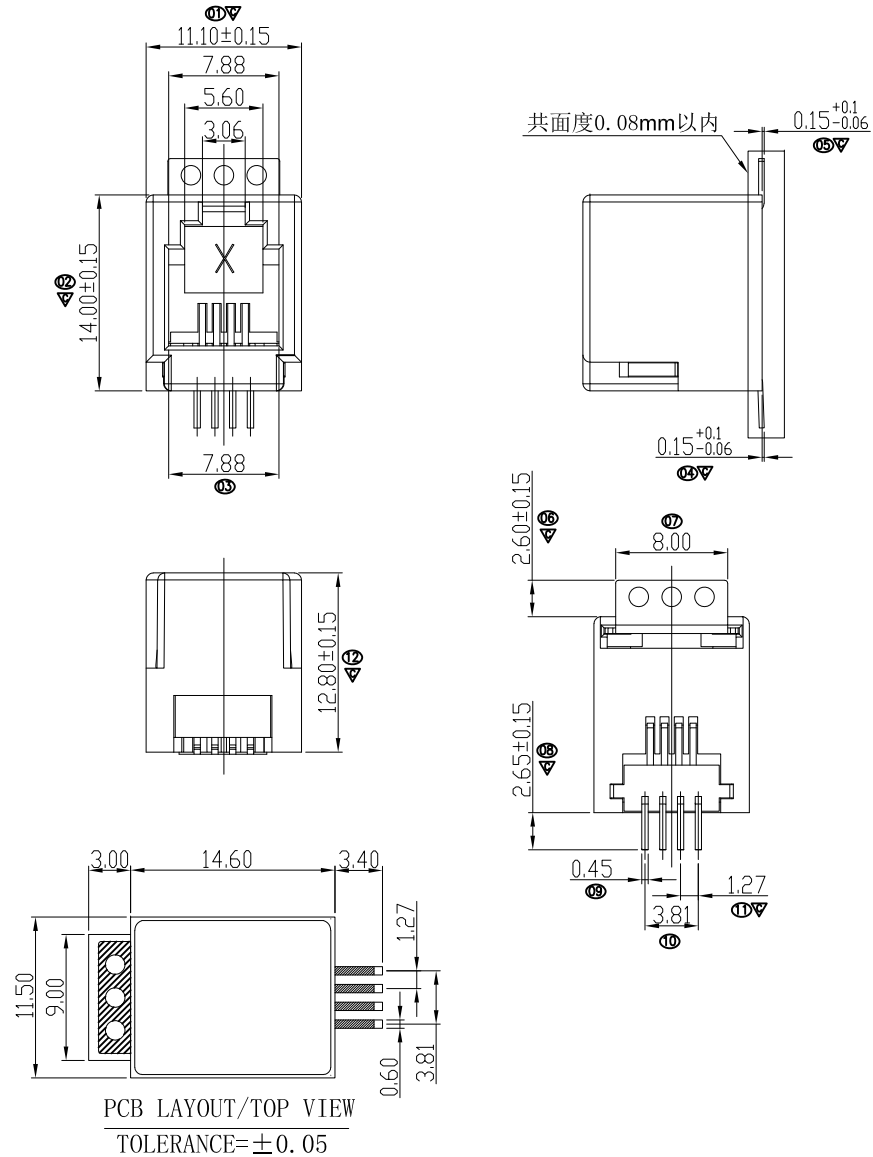

ELECTRICAL:
 CURRENT RATING: 1.5AMPS
 VOLTAGE RATING: 125V AC
 INSULATION RESISTANCE: 500M MINI
 WITHSTAND VOLTAGE: AC 1000V RMS 50Hz OR 60Hz 1MIN
 CONTACT RESISTANCE: 20m MAX

MECHANICAL:
 MATING FORCE: 2.2KG. F MAX
 RETENTION STRENGTH: 7.7KG. F BETWEEN JACK AND PLUG
 DURABILITY: 750MATING CYCLES MINI

MATERIAL:
 HOUSING: LCP, UL94V0
 CONTACT WIRE: 0.35mm DIAMETER PHOSPHOR BRONZE (C5191)
 OPTIONAL GOLD PLATING
 GOLD PLATING: 3 INCH, 6 INCH, 15 INCH, 30 INCH, 50 INCH
 METAL GASKET : 0.40mm THICKNESS, NICKEL PLATED COPPER ALLO (C2680)

P/N: RJ52S-4411-00441XP

- GOLD PLATING
 - 1-Gold Flash
 - 2-1u
 - 3-1.5u
 - 4-3u
 - 5-6u
- PLASTIC
 - 1-PBT
 - 2-NY66
 - 3-NY46
 - 4-LCP
 - 5-FR520 PA
- COLOR
 - 1-BLACK
 - 2-WHITE
 - 3-RED
 - 4-YELLOW
- PACKING TYPE
 - 1-RELL
 - 2-PVC TRAY

				GENERAL TOLERANCE		DRAWN	<i>Sene Li</i>	2015-03-12	UNIT	MM	东莞市祥舜电子科技有限公司 DONGGUAN X-SHUN ELECTRONIC TECHNOLOGY CO., LTD TEL:+86 769 81885389 FAX:+86 769 81887859 E-Mail:sales@x-shun.com Http:www.x-shun.com	
				.X ±0.35	X.° ± 2°	CHECKE	PH		SCALE	1:1		
A0		NEW DESIGN	2015/03/12			APPROVE			SHEET		PART NO.	RJ52S-4411-00441XP
REV	ECN NO	DESCRIPTION	DATE	SIGNATURE	PROJECT	DRAWING NO			REV	A0	TITLE	RJ45 4P4C 180° SMT JACK