
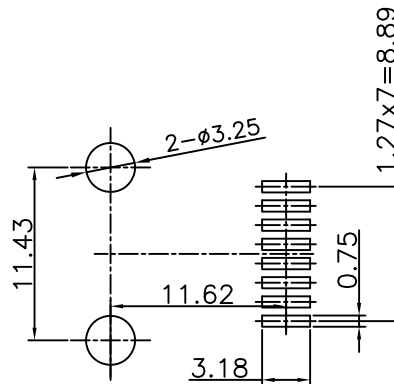
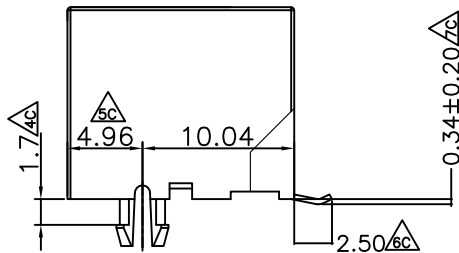



RoHS compliant

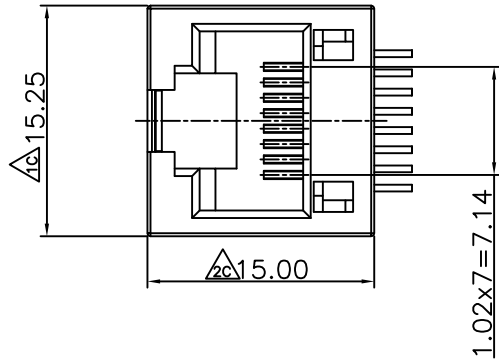

PCB LAYOUT/TOP VIEW

NOTES

- MATERIAL
 1. HOUSING MATERIAL
 2. CONTACT MATERIAL
 3. PLATING

: HIGH TEMP THERMOPLASTIC
 FLAMMABILITY RATING UL94V-0.
 : PHOSPHOR BRONZE T=0.3mm.
 : GOLD LATING OVER NICKEL IN CONTACT
 TIN PLATING OVER NICKEL IN SOLDER AREA.
 : FU", 3U", 6U", 15U", 30", 50".

ELECTRICAL

1. VOLTAGE RATING : 125 VAC RMS.
 2. CURRENT RATING : 1.5 AMP.
 3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
 4. INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500V DC .
 5. DIELECTRIC DIELECTRIC RESISTANCE : 1000V AC RMS 50Hz. 1MIN.

MECHANICAL

1. DURRABILITY : 750 CYCLES MIN.
 2. PCB RETENTIONPRE-SOLDER : 1 LB MIN.

ENVIRONMENTAL:

1. STORAGE : -40°C~+85°C.
 2. OPERATION : -40°C TO 85°C.

P/N:RJ52S-8811-05X5XXJ

GOLD PLATING	PLASTIC	COLOR	PACKING TYPE
1-Gold Flash	1-PBT	1-BLACK	1-RELL
2-1u	2-NY66	2-WHITE	2-PVC TRAY
3-1.5u	3-NY46	3-RED	
4-3u	4-LCP	4-YELLOW	
5-6u	5-PA9T		

REV	ECN NO	DESCRIPTION	DATE	SIGNATURE	PROJECT	DRAWING NO	REV	A0	TITLE
A0		NEW DESIGN	2015/09/21						RJ52S-8811-05X5XXJ
									RJ45 8P8C SMT 180° PCB JACK

X-SHUN 东莞市祥舜电子科技有限公司
 DONGGUAN X-SHUN ELECTRONICTECHNOLOGY CO., LTD
 TEL:+86 769 81885389 FAX:+86 769 81887859
 E-Mail:sales@x-shun.com Http:www.x-shun.com