
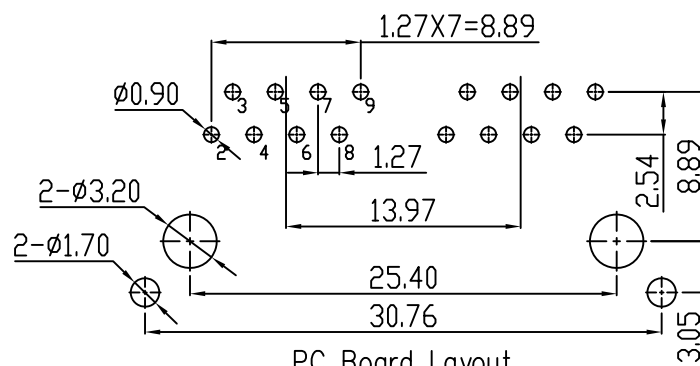
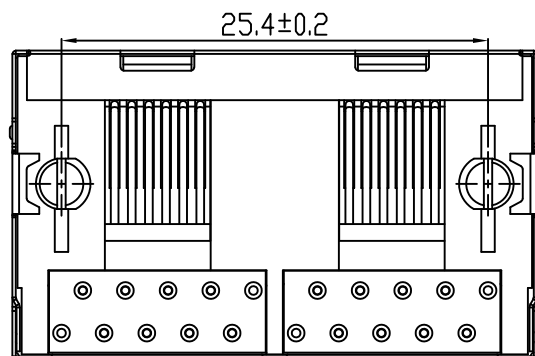
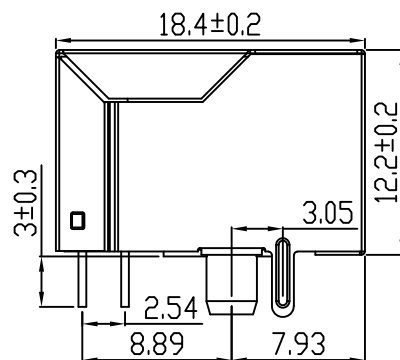


RoHS compliant

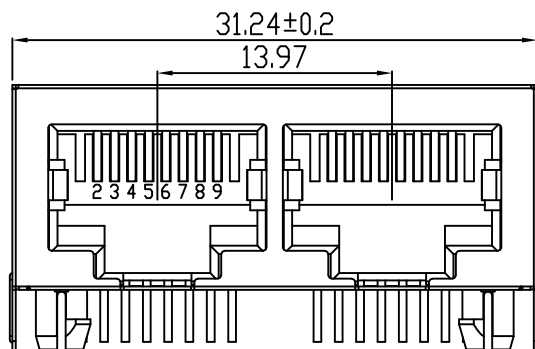

NOTES:

ELECTRICAL:

1. VOLTAGE RATING: 125V AC.
2. CURRENT RATING: 1.5A.
3. CONTACT RESISTANCE: 30 mΩ MAX.
4. INSULATION RESISTANCE: 500 MΩ MIN @ 500V DC.
5. DIELECTRIC STRENGTH: 1000V AC 50Hz or 60Hz, 1MIN.


MECHANICAL:

1. INSERT MATERIAL: UL94V-0.
2. CONTACT MATERIAL: Ø0.46mm C51000 (QSn4-0.3) PHOSPHOR BRONZE GOLD PLATING OVER NICKEL.
3. SHIELD: 0.20mm THICKNESS H65Y BRASS NICKEL PLATED.
4. MATING/UNMATING FORCE: 2.2KG.F MAX.
5. RETENTION STRENGTH: 3.0KG.F MIN BETWEEN JACK AND PLUG.
6. OPERATING LIFE: 750 CYCLES MIN.

ENVIRONMENTAL:

1. STORAGE: -40°C ~ +85°C RELATIVE HUMIDITY<70%.
2. OPERATION: -40°C ~ +85°C.

P/N:RJ56B-1812-1100111

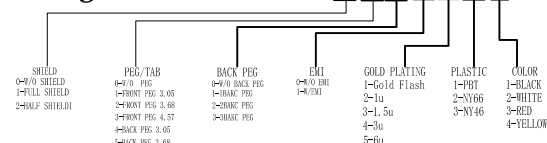

				GENERAL TOLERANCE		DRAWN	Gene Li	2016/07/22	UNIT	MM	X-SHUN 东莞市祥舜电子科技有限公司 DONGGUAN X-SHUN ELECTRONICTECHNOLOGY CO., LTD TEL:+86 769 81885389 FAX:+86 769 81887859 E-Mail:sales@x-shun.com Http:www.x-shun.com	
				.X	±0.35 X.° ± 2°	CHECKE	SC		SCALE	1:1		
				.XX	±0.25 .X° ± 1°							
A0		NEW DESIGN	2016/07/22		.XXX	±0.15 .XX° ± 0.5°	APPROVE			SHEET		PART NO. RJ56B-1812-1100111
REV	ECN NO	DESCRIPTION	DATE	SIGNATURE	PROJECT		DRAWING NO			REV	A0	TITLE 5622S 1X2 10P8C F3.05 (无后背脚)