
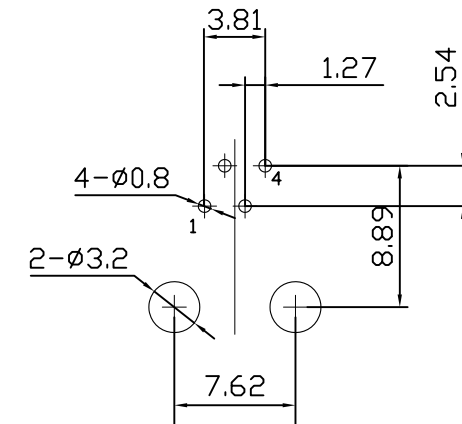

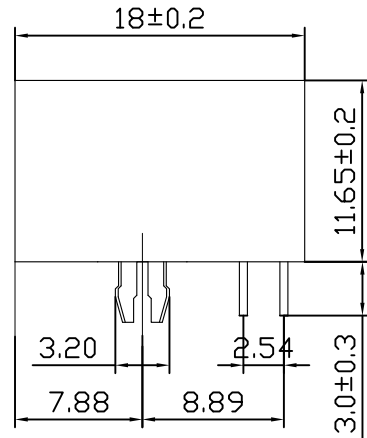


RoHS compliant

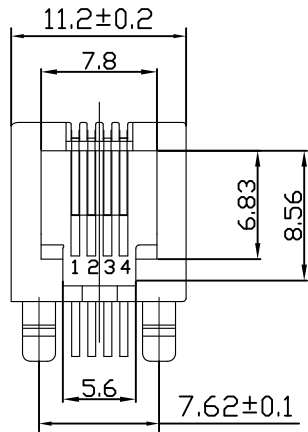

PC Board Layout
Component Side Shown

NOTES:

ELECTRICAL:

1. VOLTAGE RATING: 125 VAC RMS.
2. CURRENT RATING: 1.5 AMP.
3. CONTACT RESISTANCE: 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 500 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH: 1000 VAC RMS 50Hz or 60Hz, 1MIN.

MECHANICAL:

1. INSERT MATERIAL: UL94V-0.
2. CONTACT MATERIAL: DIAMETER 0.46MM PHOSPHOR BRONZE
GOLD PLATING OVER NICKEL.
3. MATING/UNMATING FORCE: 2.2KG.F MAX.
4. RETENTION STRENGTH: 7.7KG.F MIN BETWEEN JACK AND PLUG.
5. OPERATING LIFE: 750 CYCLES MIN.

ENVIRONMENTAL:

1. STORAGE: -40°C ~ +85°C RELATIVE HUMIDITY<70%.
2. OPERATION: -40°C ~ +85°C.

Remark:

1. The mark with★ is the key inspection dimension for QC

P/N: RJ53A-4411-01111X

GOLD PLATING (镀金厚度):

1-FU"; 2-1U"; 3-1.5U"; 4-3U";
5-6U"; 6-15U";

PLASTIC (塑料):

1-PBT;
2-NYLON66 (尼龙66);
3-NYLON46 (尼龙46)

COLOR (颜色):

1-BLACK (黑色); 2-WHITE (白色); 3-RED (红色);
4-YELLOE (黄色); 5-BLUE (蓝色); 6-GREEN (绿色)

NOTE
X-NO Note

					GENERAL TOLERANCE		DRAWN	<i>Sene Li</i>	2014-03-12	UNIT	MM	X-SHUN 东莞市祥舜电子科技有限公司 DONGGUAN X-SHUN ELECTRONIC TECHNOLOGY CO., LTD		
					.X	±0.35	X.°	± 2°	CHECKE	SC	SCALE	1:1	TEL:+86 769 81885389	FAX:+86 769 81887859
					.XX	±0.25	.X°	± 1°	APPROVE		SHEET		E-Mail:sales@x-shun.com	Http:www.x-shun.com
A0		NEW DESIGN	2014-03-12		.XXX	±0.15	.XX°	± 0.5°			PART NO.	RJ53A-4411-01111X		
REV	ECN NO	DESCRIPTION	DATE	SIGNATURE	PROJECT		DRAWING NO			REV	A0	TITLE	5321 4P4C 1X1 JACK	