
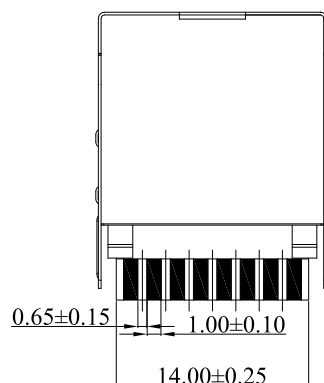

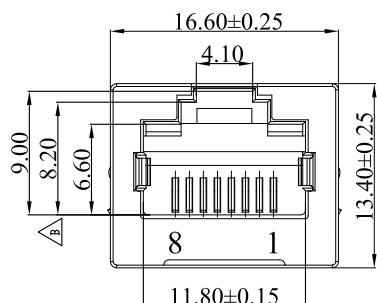



RoHS compliant



NOTES

MATERIAL

- 1.HOUSING : PBT UL94V-0
- 2.HOLDER : LCP UL94V-0
- 3.CONTACT : PHOSPHOR BRONZE T=0.25mm.
- 4.PLATING : CONTACT AREA-SELECTIVE GOLD PLATING, TAILS PLATING TIN OVER NICKEL.
- 5.SHIELD : 0.20mm THICKNESS COPPER ALLOY WITH NICKEL PLATED.

ELECTRICAL

- 1.VOLTAGE RATING : 125 VAC RMS.
- 2.CURRENT RATING : 1.5 AMP.
- 3.CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- 4.INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500V DC .
- 5.DIELECTRIC RESISTANCE : 1000V AC RMS 50Hz. 1MIN.

MECHANICAL

- 1.DURRABILITY : 750 CYCLES MIN.
- 2.PCB RETENTIONPRE-SOLDER : 1 LB MIN.

ENVIRONMENTAL:

- 1.STORAGE : -40℃~+85℃.
- 2.OPERATION : -20℃~+70℃.

PART NUMBER:

P/N 料号	DESCRIPTION 描述	MATER COLOR 材质	GOLD PLATING 电镀
RJ52M-8811-120111X	RJ45 180° 8P8C 焊线式母座 JACK	PBT/LCP BLACK 黑	6U"
RJ52M-8811-120511X	RJ45 180° 8P8C 焊线式母座 JACK	PBT/LCP BLACK 黑	6U"
RJ52M-8811-127111X	RJ45 180° 8P8C 焊线式母座 JACK	PBT/LCP BLACK 黑	30U"
RJ52M-8811-128111X	RJ45 180° 8P8C 焊线式母座 JACK	PBT/LCP BLACK 黑	50U"

					GENERAL TOLERANCE		DRAWN	Gene Li		2016-04-11	UNIT	MM	X-SHUN 东莞市祥舜电子科技有限公司 DONGGUAN X-SHUN ELECTRONICTECHNOLOGY CO., LTD TEL:+86 769 81885389 FAX:+86 769 81887859 E-Mail:sales@x-shun.com Http:www.x-shun.com		
					. X	±0.35	X. °	± 2°	CHECKE	TM		SCALE	1:1		
					. XX	±0.25	. X°	± 1°							
A0		NEW DESIGN		2016/04/11		. XXX	±0.15	. XX°			± 0.5°	APPROVE		SHEET	
REV	ECN NO	DESCRIPTION		DATE	SIGNATURE	PROJECT		DRAWING NO				REV	A0	TITLE RJ45 180° 8P8C 焊线式母座 JACK	