
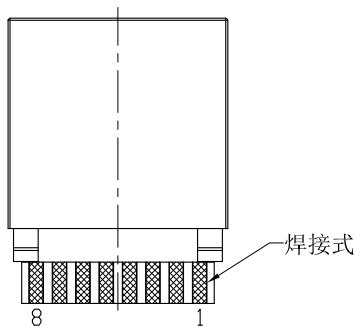


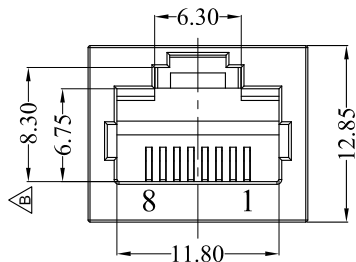



RoHS compliant



NOTES

MATERIAL

- 1.HOUSING : PBT BLACK UL94V-0
- 2.SUPPORT : LCP BLACK UL90V-0 .
- 3.CONTACT PLATING :PHOSPHOR BRONZE T=0.3mm CONTACT AREA-SELECTIVE GOLD PLATING, TAILS PLATING TIN OVER NICKEL.

ELECTRICAL

- 1.VOLTAGE RATING : 125 VAC RMS.
- 2.CURRENT RATING : 1.5 AMP.
- 3.CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- 4.INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500V DC .
- 5.DIELECTRIC RESISTANCE : 1000V AC RMS 50Hz. 1MIN.

MECHANICAL

- 1.DURRABILITY : 750 CYCLES MIN.
- 2.PCB RETENTIONPRE-SOLDER : 1 LB MIN.

ENVIRONMENTAL:

- 1.STORAGE : -40℃~+85℃.
- 2.OPERATION : -40℃~+85℃.

PART NUMBER:

P/N 料号	DESCRIPTION 描述	MATER COLOR 材质	GOLD PLATING 电镀
RJ52M-8811-020111X	RJ45 180° 8P8C 焊线式母座 JACK	PBT/LCP BLACK 黑	6P"
RJ52M-8811-020511X	RJ45 180° 8P8C 焊线式母座 JACK	PBT/LCP BLACK 黑	6U"
RJ52M-8811-027111X	RJ45 180° 8P8C 焊线式母座 JACK	PBT/LCP BLACK 黑	30U"
RJ52M-8811-028111X	RJ45 180° 8P8C 焊线式母座 JACK	PBT/LCP BLACK 黑	50U"

					GENERAL TOLERANCE	DRAWN	Gene Li		2016-04-11	UNIT	MM	X-SHUN 东莞市祥舜电子科技有限公司 DONGGUAN X-SHUN ELECTRONIC TECHNOLOGY CO., LTD TEL:+86 769 81885389 FAX:+86 769 81887859 E-Mail:sales@x-shun.com Http:www.x-shun.com	
					. X ± 0.35 X. ° ± 2°	CHECKE	TM			SCALE	1:1		
A0		NEW DESIGN	2016/04/11		. XX ± 0.25 X. ° ± 1°	APPROVE				SHEET		PART NO.	SEE TABLE
REV	ECN NO	DESCRIPTION	DATE	SIGNATURE	. XXX ± 0.15 XX. ° ± 0.5°	PROJECT				REV	A0	TITLE	RJ45 JACK 8P8C 焊接式 全塑 无边