RoHS compliant



TOP VIEW

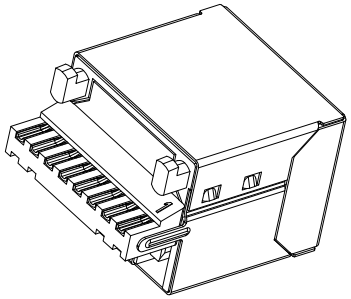



LEFT SIDE VIEW



FRONT VIEW



RIGHT SIDE VIEW



BACK VIEW

NOTES

MATERIAL

1.HOUSING : PBT UL94V-0
2.HOLDER : LCP UL94V-0
3.CONTACT : PHOSPHOR BRONZE T=0.25mm.
4.PLATING : CONTACT AREA-SELECTIVE GOLD PLATING, TAILS PLATING TIN 80u" MIN OVER NICKEL 50u" MIN.
5.SHIELD : 0.20mm THICKNESS COPPER ALLOY WITH NICKEL 30u" Min PLATED.

ELECTRICAL

1.VOLTAGE RATING : 125 VAC RMS.
2.CURRENT RATING : 1.5 AMP.
3.CONTACT RESISTANCE : 30 MILLIOHMS MAX.
4.INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500V DC .
5.DIELECTRIC RESISTANCE : 1000V AC RMS 50Hz. 1MIN.

MECHANICAL

1.DURRABILITY : 750 CYCLES MIN.
2.PCB RETENTIONPRE-SOLDER : 1 LB MIN.

ENVIRONMENTAL:

1.STORAGE : -40℃～+85℃.
2.OPERATION : -40℃～+85℃.



BOTTON VIEW

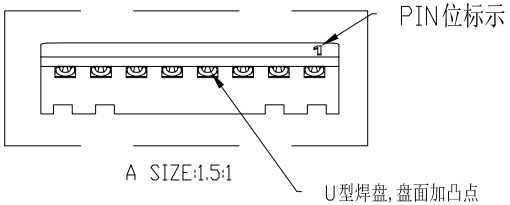

PART NUMBER:

P/N 料号	DESCRIPTION 描述	MATER COLOR 材质	GOLD PLATING 电镀
RJ52W-8811-120111X	RJ45 180° 8P8C 焊线式母座 U型端子	PBT/LCP BLACK 黑	GF"
RJ52W-8811-120511X	RJ45 180° 8P8C 焊线式母座 U型端子	PBT/LCP BLACK 黑	6U"
RJ52W-8811-127111X	RJ45 180° 8P8C 焊线式母座 U型端子	PBT/LCP BLACK 黑	30U"
RJ52W-8811-128111X	RJ45 180° 8P8C 焊线式母座 U型端子	PBT/LCP BLACK 黑	50U"

REV	ECN NO	DESCRIPTION	DATE	SIGNATURE
A0		NEW DESIGN	2020-06-10	

GENERAL TOLERANCE

.X	±0.35	X.°	± 2°
.XX	±0.25	.X°	± 1°
.XXX	±0.15	.XX°	± 0.5°

PROJECT

DRAWN	Gene Li	2020-06-10	UNIT	MM
CHECKE	TM		SCALE	1:1
APPROVE			SHEET	
DRAWING NO			REV	A0

X-SHUN 东莞市祥舜电子科技有限公司
DONGGUAN X-SHUN ELECTRONICTECHNOLOGY CO., LTD
TEL:+86 769 81885389 FAX:+86 769 81887859
E-Mail:sales@x-shun.com Http:www.x-shun.com

PART NO. SEE TABLE

TITLE RJ45 JACK 8P8C 屏蔽 无弹 无灯 焊线式 U型端子