



RoHS compliant



TOP VIEW



NOTES

MATERIAL

- 1.HOUSING : PBT UL94V-0
- 2.HOLDER : LCP UL94V-0
- 3.CONTACT : PHOSPHOR BRONZE T=0.25mm.
- 4.PLATING : CONTACT AREA-SELECTIVE GOLD PLATING,
TAILS PLATING TIN 80u" MIN OVER NICKEL 50u" MIN.

ELECTRICAL


- 1.VOLTAGE RATING : 125 VAC RMS.
- 2.CURRENT RATING : 1.5 AMP.
- 3.CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- 4.INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500V DC .
- 5.DIELECTRIC RESISTANCE : 1000V AC RMS 50Hz. 1MIN.

MECHANICAL


- 1.DURABILITY : 750 CYCLES MIN.
- 2.PCB RETENTIONPRE-SOLDER : 1 LB MIN.

ENVIRONMENTAL:


- 1.STORAGE : -40°C ~+85°C.
- 2.OPERATION : -40°C ~+85°C.




LEFT SIDE VIEW




FRONT VIEW



RIGHT SIDE VIEW




BACK VIEW



BOTTOM VIEW

平型焊盘, 盘面加网槽

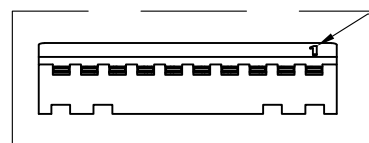

A SIZE:1.5:1

PIN位标示

PART NUMBER:

P/N 料号	DESCRIPTION 描述	MATER COLOR 材质	GOLD PLATING 电镀
RJ52W-1111-0201111	RJ50 180° 10P10C 焊线式母座 JACK	PBT/LCP BLACK 黑	6u"
RJ52W-1111-0205111	RJ50 180° 10P10C 焊线式母座 JACK	PBT/LCP BLACK 黑	6u"
RJ52W-1111-0271111	RJ50 180° 10P10C 焊线式母座 JACK	PBT/LCP BLACK 黑	30u"
RJ52W-1111-0281111	RJ50 180° 10P10C 焊线式母座 JACK	PBT/LCP BLACK 黑	50u"

REV	ECN NO	DESCRIPTION	DATE	SIGNATURE	PROJECT	DRAWING NO	REV	A0	TITLE
A0			2020-06-10						
REV	ECN NO	DESCRIPTION	DATE	SIGNATURE	PROJECT	DRAWING NO	REV	A0	TITLE

X-SHUN 东莞市祥舜电子科技有限公司
DONGGUAN X-SHUN ELECTRONIC TECHNOLOGY CO., LTD
TEL: +86 769 81885389 FAX: +86 769 81887859
E-Mail: sales@x-shun.com Http: www.x-shun.com

PART NO. SEE TABLE

TITLE RJ50 JACK 10P10C 全塑焊线式 平型端子带槽