





RoHS compliant




TOP VIEW




LEFT SIDE VIEW




FRONT VIEW




RIGHT SIDE VIEW

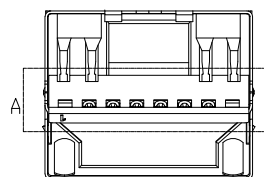

BACK VIEW



BOTTOM VIEW

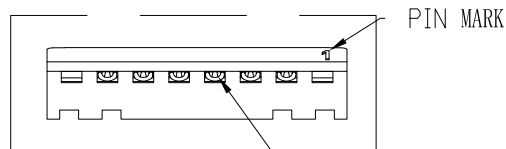

PIN MARK

U-shaped bonding pad

NOTES

MECHANICAL:

1. HOUSING MATERIAL: PBT BLACK UL94V-0
2. INSERT MATERIAL: LCP BLACK UL94V-0
3. CONTACT MATERIAL: PHOSPHOR BRONZE T=0.25mm.
4. PLATING: GOLD PLATING AT CONTACT AREA, MATTE TIN AT TAIL 100u" MIN, NICKEL 30u" MIN. OVER ALL
5. SHIELD: BRASS T=0.20mm PLATED NICKEL 30u" Min .
6. OPERATING LIFE:750 CYCLES MIN.
7. MATING/UNMATING FORCE: 30N/3.06KGf MAX
8. RETENTION STRENGTH:50N MIN. FOR 60S±5S

ELECTRICAL:

1. VOLTAGE RATING: 125 VAC RMS.
2. CURRENT RATING: 1.5 AMP.
3. CONTACT RESISTANCE : 30mΩ MAX.
4. INSULATION RESISTANCE: 1000MΩ MIN. AT 500V DC .
5. DIELECTRIC STRENGTH:1000V AC OR 1500V DC RMS AT 0.5mA 50Hz/60Hz FOR 1MINUTE.

ENVIRONMENTAL:

1. STORAGE: -40℃ TO +85℃ RELATIVE HUMIDITY<80%.
2. GUARANTEE PERIOD:12 MONTHS
3. OPERATION: -40℃ TO +85℃.
4. The mark with ★ is the key inspection dimension for QC

NO.	PACKING	PART NO.	Gold Plating
1	TRAY 100PCS/盘 2000PCS/箱 纸箱尺寸: 39*27.5*30CM	RJ52W-6611-120111X	1u"
2		RJ52W-6611-120211X	3u"
3		RJ52W-6611-120311X	6u"
4		RJ52W-6611-120411X	15u"
5		RJ52W-6611-120511X	30u"
6		RJ52W-6611-120611X	50u"

REV	ECN NO	DESCRIPTION	DATE	SIGNATURE	PROJECT	DRAWING NO	REV	MM	SCALE	SHEET	PART NO.	TITLE
A0		NEW DESIGN	2019/07/12		GENERAL TOLERANCE .X ±0.35 .X° ± 2° .XX ±0.25 .X° ± 1° .XXX ±0.15 .XX° ± 0.5°	DRAWN Gene Li CHECKE TM APPROVE	2019/07/12	UNIT	MM	1:1	RJ52W-6611-120111X	RJ11 JACK 6P6C SHIELD

X-SHUN 东莞市祥舜电子科技有限公司
DONGGUAN X-SHUN ELECTRONIC TECHNOLOGY CO., LTD
TEL: +86 769 81885389 FAX: +86 769 81887859
E-Mail: sales@x-shun.com Http: www.x-shun.com