



RoHS compliant



TOP VIEW



NOTES

MATERIAL


- 1.HOUSING : PBT BLACK UL94V-0
2.HOLDER : LCP UL94V-0
3.CONTACT : PHOSPHOR BRONZE T=0.25mm.
4.PLATING : CONTACT AREA-SELECTIVE GOLD PLATING,
TAILS PLATING TIN 80u" MIN OVER NICKEL 50u" MIN.

ELECTRICAL


- 1.VOLTAGE RATING : 125 VAC RMS.
2.CURRENT RATING : 1.5 AMP.
3.CONTACT RESISTANCE : 30 MILLIOHMS MAX.
4.INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500V DC .
5.DIELECTRIC RESISTANCE : 1000V AC RMS 50Hz. 1MIN.
6.DURRABILITY : 750 CYCLES MIN.

ENVIRONMENTAL:


- 1.STORAGE : -40℃～+85℃.
2.OPERATION : -40℃～+85℃.




LEFT SIDE VIEW




FRONT VIEW




RIGHT SIDE VIEW



BACK VIEW

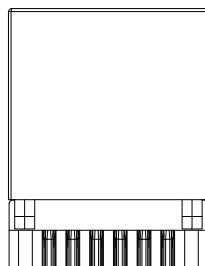

BOTTON VIEW

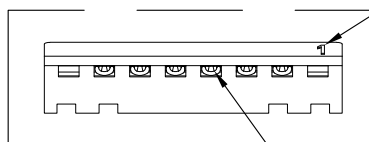

A SIZE:1.5:1

PIN位标示

U型焊盘, 盘面加凸点

PART NUMBER:

P/N 料号	DESCRIPTION 描述	MATER COLOR 材质	GOLD PLATING 电镀
RJ52W-6611-020111X	RJ12 180° 6P6C 焊线式母座 U型端子	PBT/LCP BLACK 黑	6U"
RJ52W-6611-020511X	RJ12 180° 6P6C 焊线式母座 U型端子	PBT/LCP BLACK 黑	6U"
RJ52W-6611-027111X	RJ12 180° 6P6C 焊线式母座 U型端子	PBT/LCP BLACK 黑	30U"
RJ52W-6611-028111X	RJ12 180° 6P6C 焊线式母座 U型端子	PBT/LCP BLACK 黑	50U"

					GENERAL TOLERANCE		DRAWN	Gene Li	2020-06-10	UNIT	MM	东莞市祥舜电子科技有限公司 DONGGUAN X-SHUN ELECTRONIC TECHNOLOGY CO., LTD. TEL: +86 769 81885389 FAX: +86 769 81887859 E-Mail: sales@x-shun.com Http: www.x-shun.com	
					.X ± 0.35 X. ° ± 2°	CHECKER	TM		SCALE	1:1	PART NO.		SEE TABLE
					.XX ± 0.25 .X° ± 1°								
A0		NEW DESIGN	2020-06-10		.XXX ± 0.15 .XX° ± 0.5°	APPROVE			SHEET	1 OF 1			
REV	ECN NO	DESCRIPTION	DATE	SIGNATURE	PROJECT	DRAWING NO			REV	A0	TITLE	RJ12 JACK 6P6C 全塑焊线式 U型端子	