



RoHS compliant




TOP VIEW




NOTES

MATERIAL


1. HOUSING: PBT UL94V-0
2. HOLDER: LCP UL94V-0
3. CONTACT: PHOSPHOR BRONZE T=0.25mm.
4. PLATING: CONTACT AREA-SELECTIVE GOLD PLATING,
TAILS PLATING TIN 80u" MIN OVER NICKEL 30u" MIN.
5. SHIELD: 0.20mm THICKNESS COPPER ALLOY
WITH NICKEL 30u" Min PLATED.




LEFT SIDE VIEW



FRONT VIEW



RIGHT SIDE VIEW




BACK VIEW

ELECTRICAL


1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500V DC .
5. DIELECTRIC RESISTANCE : 1000V AC RMS 50HZ. 1MIN.
6. DURRABILITY : 750 CYCLES MIN.

ENVIRONMENTAL:

- 1.STORAGE : -40℃~+85℃ RELATIVE HUMIDITY<80%.
2.OPERATION : -40℃~+85℃.

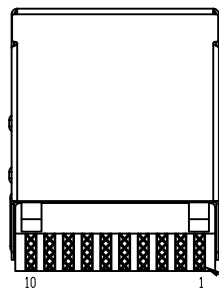

BOTTON VIEW

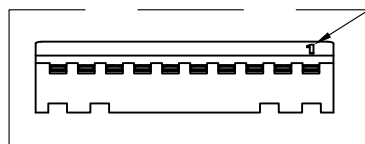

A SIZE:1.5:1

PIN位标示

PART NUMBER:

P/N 料号	DESCRIPTION 描述	MATER COLOR 材质	GOLD PLATING 电镀
RJ52W-1111-1201111	RJ50 180° 10P10C 焊线式母座 无接地脚	PBT/LCP BLACK 黑	6μ"
RJ52W-1111-1205111	RJ50 180° 10P10C 焊线式母座 无接地脚	PBT/LCP BLACK 黑	6μ"
RJ52W-1111-1271111	RJ50 180° 10P10C 焊线式母座 无接地脚	PBT/LCP BLACK 黑	300μ"
RJ52W-1111-1281111	RJ50 180° 10P10C 焊线式母座 无接地脚	PBT/LCP BLACK 黑	500μ"

					GENERAL TOLERANCE	DRAWN	Gene Li		2020-06-10	UNIT	MM	 东莞市祥舜电子科技有限公司 DONGGUAN X-SHUN ELECTRONIC TECHNOLOGY CO., LTD. TEL:+86 769 81885389 FAX:+86 769 81887859 E-Mail:sales@x-shun.com Http:www.x-shun.com		
					.X ±0.25 .X.° ± 2°	CHECKE	TM			SCALE	1:1			
A0			2020-06-10		.XX ±0.20 .X.° ± 1°	APPROVE				SHEET	1 OF 1		PART NO.	SEE TABLE
REV	ECN NO	DESCRIPTION	DATE	SIGNATURE	PROJECT 	DRAWING NO				REV	A0		TITLE	RJ50 JACK 10P10C 屏蔽 无弹 无灯 焊线式 无接地脚