
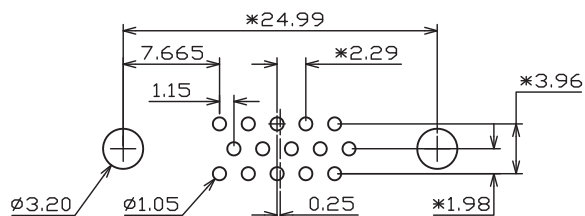
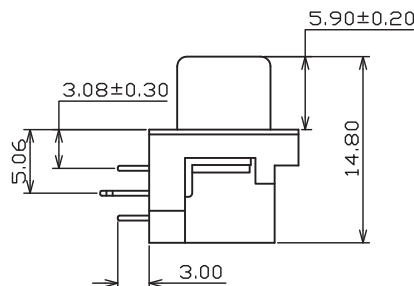
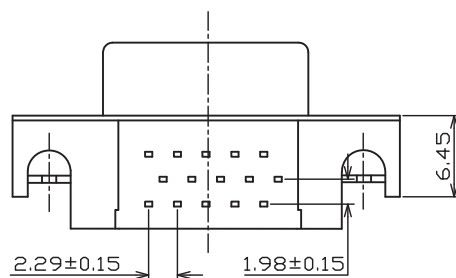
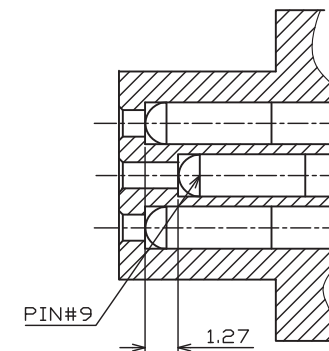
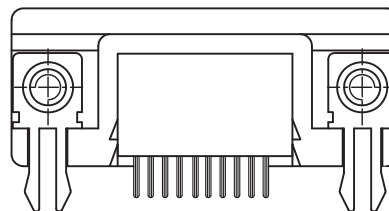


RoHS compliant

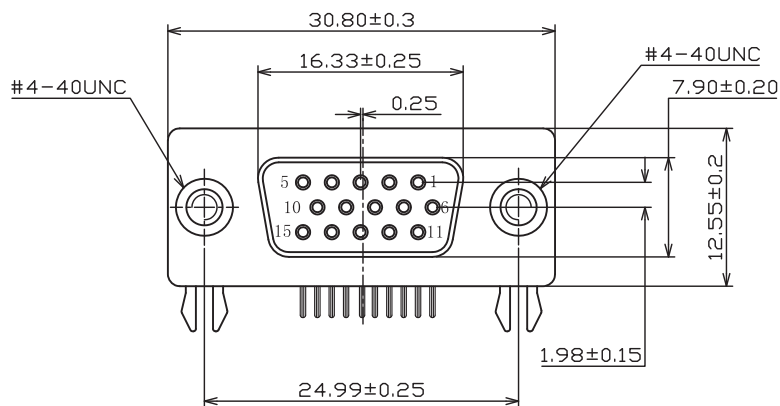

RECOMMENDED PCB LAYOUT THICKNESS=1.6mm
TOLERANCE: ±0.05

SPECIFICATIONS

- 1.1 Voltage: 250 VAC(RMS) Max.
- 1.2 Current Rating: 3 Ampere per Contact
- 1.3 Contact Resistance: 25 Milliohms Max.
- 1.4 Insulation Resistance: 5000 Megohms Min.
- 1.5 Dielectric Withstanding Voltage: 1000 VAC(RMS)
- 1.6 Total Mating Force: 6.0 Kgf Max.
- 1.7 Total Unmating Force: 1.2 Kgf Min.
- 1.8 Operating Temperature: -55°C to +85°C

⑥	BOARD LOCKS	2	BRASS	Ni
⑤	COVER	1	PBT+30%G/F	BLACK
④	FISH FORK	2	SPCC	Tin
③	SHELL	1	SPCC	Ni
②	CONTACT	15	BRASS	SEMI-GOLD TIN
①	INSULATOR	1	PBT+30%G/F	BLACK
ITEM	PART NAME	QTY.	MATERIAL	REMARKS

					GENERAL TOLERANCE		DRAWN		Gene Li		2020/05/21		X-SHUN 东莞市祥舜电子科技有限公司 DONGGUAN X-SHUN ELECTRONIC TECHNOLOGY CO., LT								
					.X	±0.35	X.°	± 2°	CHECKE		QH			PART NO.		XSR3EA2-01PB0P					
A0		NEW DESIGN	2020/05/21		.XX	±0.25	X.°	± 1°	APPROVE					TITLE:		HDR3.08 15PIN 母座 卧式DIP 铆合 黑/蓝胶					
					.XXX	±0.15	.XX°	± 0.5°													
REV	ECN NO	DESCRIPTION	DATE	SIGNATURE	PROJECT				UNIT	mm	SCALE	1:1	SHEET		REV	A0	DRAWING NO.	XSR3EA2-01			