

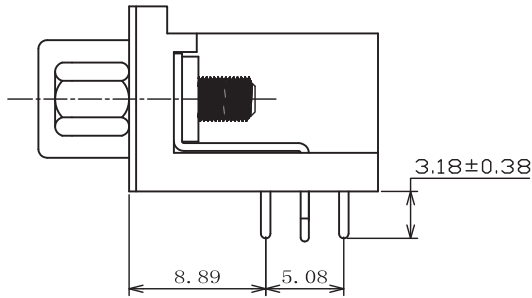


RoHS compliant


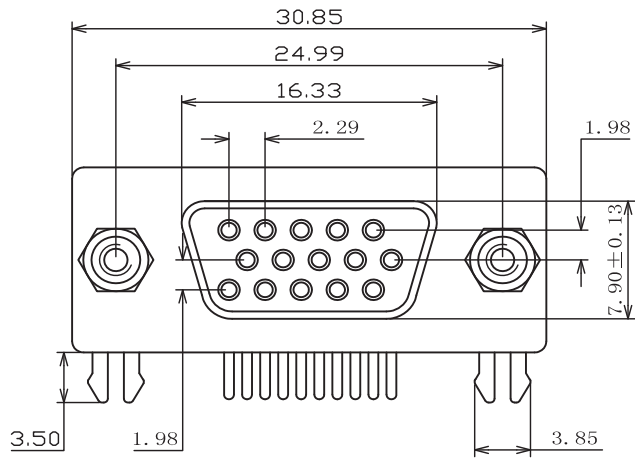


SPECIFICATIONS

- 1.1 Voltage: 250 VAC(RMS) Max.
- 1.2 Current Rating: 3 Ampere per Contact
- 1.3 Contact Resistance: 25 Milliohms Max.
- 1.4 Insulation Resistance: 5000 Megohms Min.
- 1.5 Dielectric Withstanding Voltage: 1000 VAC(RMS)
- 1.6 Total Mating Force: 6.0 Kgf Max.
- 1.7 Total Unmating Force: 1.2 Kgf Min.
- 1.8 Operating Temperature: -55° C to +85° C

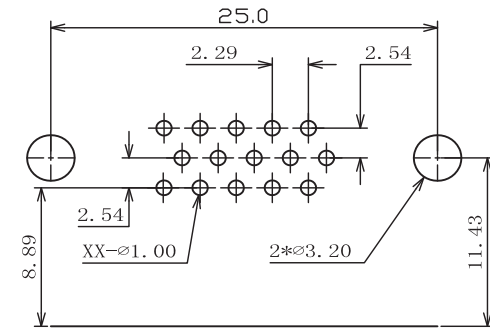

RECOMMENDED PCB LAYOUT THICKNESS=1.6mm  
TOLERANCE: ± 0.05

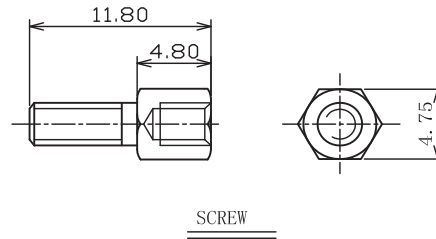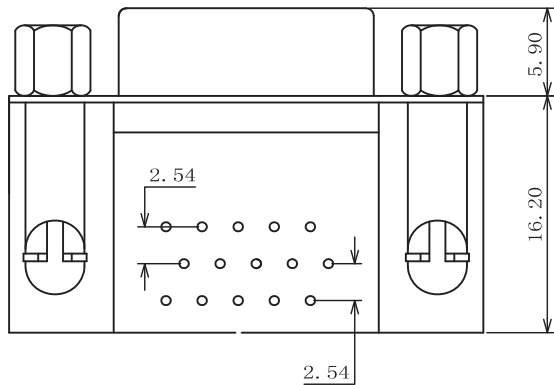

2	BOARD LOCKS	BRASS ,Ni PLATING OVER ALL.	⑦
2	SCREW	STEEL ,Ni PLATING OVER ALL.	⑥
2	FISH FORK	SPCC,Tin PLATING OVER ALL.	⑤
1	COVER	HIGH TEMPERATURE PLASTIC UL94V-0	④
1	HOUSING	HIGH TEMPERATURE PLASTIC UL94V-0	③
15	CONTACT	COPPER ALLOY, GOLD FLASH PLATED ON CONTACT AREA TIN PLATING ON SOLDER AREA, NI PLATING UNDER OVER ALL	②
1	SHELL	SPCC,Ni PLATING OVER ALL.	①
QTY'S	PART	SPECIFICATION	ITEM

				GENERAL TOLERANCE	DRAWN	Sena Li	2020/05/21			
				.X ±0.35 X.° ± 2°	CHECKE	QH				
				.XX ±0.25 .X° ± 1°	APPROVE					
				.XXX ±0.15 .XX° ± 0.5°						
REV	ECN NO	DESCRIPTION	DATE	SIGNATURE	PROJECT	UNIT	mm	SCALE	1:1	SHEET

**X-SHUN** 东莞市祥舜电子科技有限公司  
DONGGUAN X-SHUN ELECTRONIC TECHNOLOGY CO., LTD

PART NO: XSR8EB1-GFPLOP

TITLE: HDR8.89 15PIN 母座 卧式DIP 铆锁4.8螺丝 黑/蓝胶

REV A0 DRAWING NO. XSR8EB1-01

F  
E  
D  
C  
B  
A

F  
E  
D  
C  
B  
A