
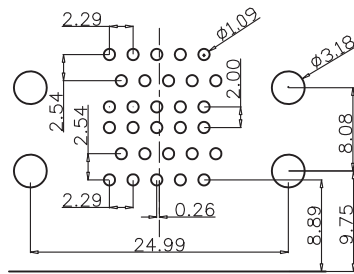
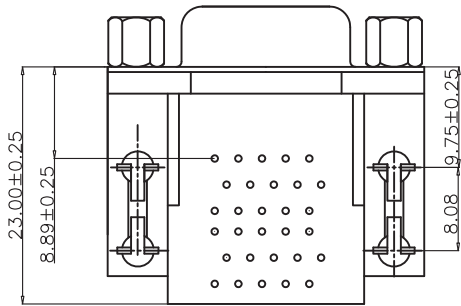
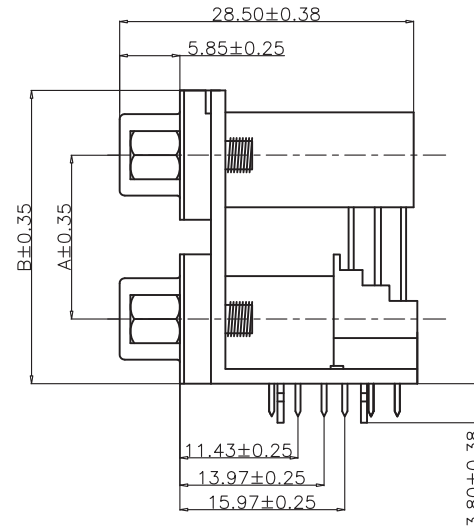


RoHS compliant

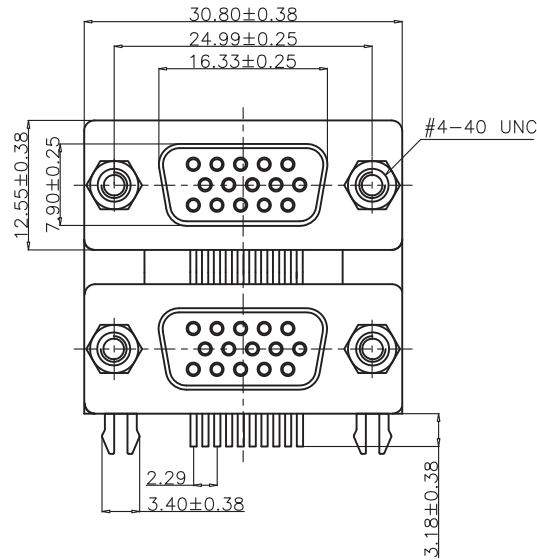

RECOMMENDED PCB LAYOUT THICKNESS=1.6mm
TOLERANCE:±0.05

SPECIFICATIONS

- 1.1 Voltage: 250 VAC(RMS) Max.
- 1.2 Current Rating: 3 Ampere per Contact
- 1.3 Contact Resistance: 25 Milliohms Max.
- 1.4 Insulation Resistance: 5000 Megohms Min.
- 1.5 Dielectric Withstanding Voltage: 1000 VAC(RMS)
- 1.6 Total Mating Force: 6.0 Kgf Max.
- 1.7 Total Unmating Force: 1.2 Kgf Min.
- 1.8 Operating Temperature: -55°C to +85°C

DIM A	DIM B
15.88	28.43
19.05	31.60

QTY'S	PART	SPECIFICATION	ITEM
2	BOARD LOCKS	BRASS ,Ni PLATING OVER ALL.	⑦
2	SCREW	STEEL ,Ni PLATING OVER ALL.	⑥
2	FISH FORK	SPCC,Tin PLATING OVER ALL.	⑤
2	COVER	HIGH TEMPERATURE PLASTIC UL94V-0	④
2	HOUSING	HIGH TEMPERATURE PLASTIC UL94V-0	③
30	CONTACT	COPPER ALLOY, GOLD FLASH PLATED ON CONTACT AREA TIN PLATING ON SOLDER AREA, NI PLATING UNDER OVER ALL	②
2	SHELL	SPCC,Ni PLATING OVER ALL.	①

REV	ECN NO	DESCRIPTION	DATE	SIGNATURE	PROJECT	UNIT	mm	SCALE	1:1	SHEET	1/1
A0		NEW DESIGN	2020/05/21								

DRAWN		Gene Li		2020/05/21	
CHECKE		QH			
APPROVE					
PART NO.		XSR8GB3-GFPLOP23			
TITLE:		HDR8.89 15PIN 母座 双层卧式DIP 铆锁4.8螺丝 间距15.88/19.05mm			
REV	A0	DRAWING NO.	XSR8GB3-01		

X-SHUN 东莞市祥舜电子科技有限公司
DONGGUAN X-SHUN ELECTRONIC TECHNOLOGY CO., LTD