
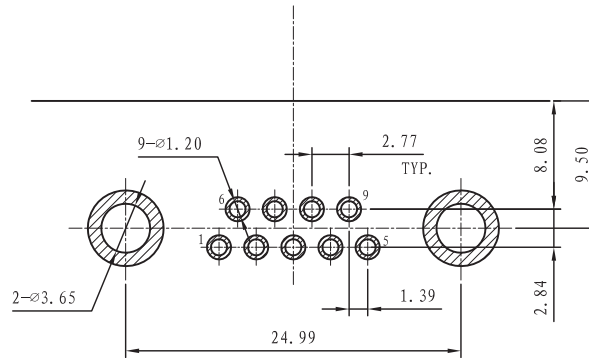
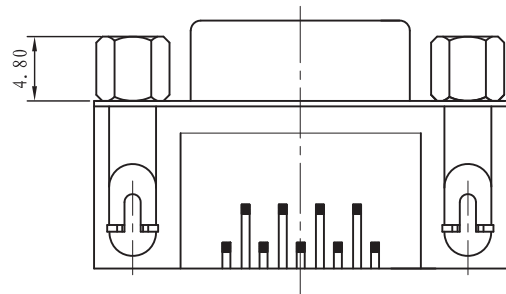
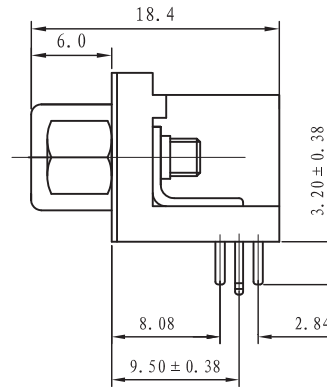


RoHS compliant

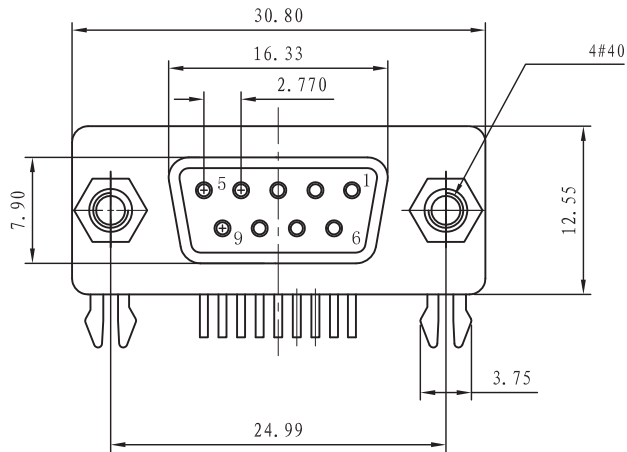

RECOMMENDED PCB LAYOUT (BOTTOM VIEW)

T=1.60MM, TOLERANCE: ± 0.05

SPECIFICATIONS

- 1.1 Voltage: 250 VAC(RMS) Max.
- 1.2 Current Rating: 3 Ampere per Contact
- 1.3 Contact Resistance: 25 Milliohms Max.
- 1.4 Insulation Resistance: 5000 Megohms Min.
- 1.5 Dielectric Withstanding Voltage: 1000 VAC(RMS)
- 1.6 Total Mating Force: 6.0 Kgf Max.
- 1.7 Total Unmating Force: 1.2 Kgf Min.
- 1.8 Operating Temperature: -55° C to +85° C

2	BOARD LOCKS	BRASS , NI PLATING OVER ALL.	⑦
2	SCREW	STEEL , NI PLATING OVER ALL.	⑥
2	FISH FORK	SPCC, Tin PLATING OVER ALL.	⑤
1	COVER	HIGH TEMPERATURE PLASTIC UL94V-0	④
1	HOUSING	HIGH TEMPERATURE PLASTIC UL94V-0	③
15	CONTACT	COPPER ALLOY, GOLD FLASH PLATED ON CONTACT AREA TIN PLATING ON SOLDER AREA, NI PLATING UNDER OVER ALL	②
1	SHELL	SPCC, NI PLATING OVER ALL.	①
QTY'S	PART	SPECIFICATION	ITEM

					GENERAL TOLERANCE		DRAWN		Gene Li		2020/05/21		X-SHUN 东莞市祥舜电子科技有限公司 DONGGUAN X-SHUN ELECTRONIC TECHNOLOGY CO., LTD					
					.X	±0.35	X.°	± 2°	CHECKE		QH			PART NO.		XSR8CB2-GFPB1P23		
A0		NEW DESIGN		2020/05/21		.XX	±0.25	X.°	± 1°	APPROVE				TITLE:		DR8.08 9母/公 卧式DIP 铆锁4.8螺丝 黑/蓝胶		
REV	ECN NO	DESCRIPTION		DATE	SIGNATURE	PROJECT			UNIT	mm	SCALE	1:1	SHEET	1/1	REV	A0	DRAWING NO.	XSR8CB2-01