
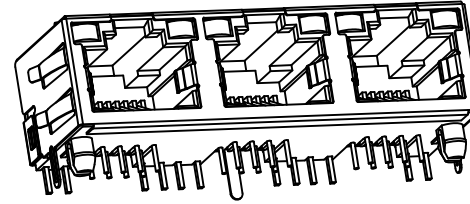


RoHS compliant

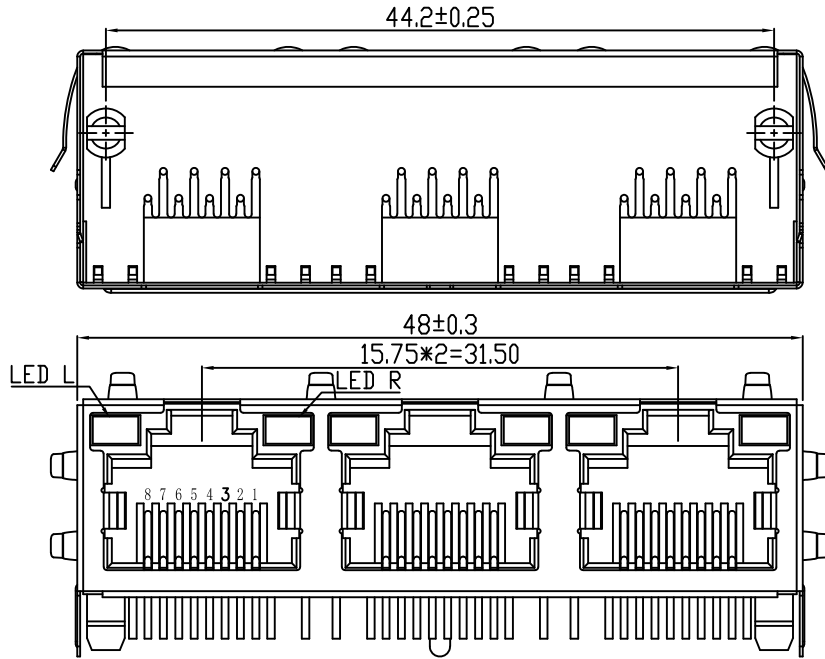

NOTES:

ELECTRICAL:


1. VOLTAGE RATING: 125V AC.
2. CURRENT RATING: 1.5A.
3. CONTACT RESISTANCE: 30 mΩ MAX.
4. INSULATION RESISTANCE: 500 MΩ MIN @ 500V DC.
5. DIELECTRIC STRENGTH: 1000V AC 50Hz or 60Hz, 1MIN.

MECHANICAL:


1. INSERT MATERIAL: UL94V-0.
2. CONTACT MATERIAL: DIAMETER 0.46mm C51000 (QSn4-0.3) PHOSPHOR BRONZE GOLD PLATING OVER NICKEL.
3. SHIELD: 0.20mm THICKNESS H65Y BRASS NICKEL PLATED.
4. MATING/UNMATING FORCE: 2.2KG.F MAX.
5. RETENTION STRENGTH: 5.0KG.F MIN BETWEEN JACK AND PLUG.
6. OPERATING LIFE: 750 CYCLES MIN.

ENVIRONMENTAL:


1. STORAGE: -40°C ~ +85°C RELATIVE HUMIDITY<70%.
2. OPERATION: -40°C ~ +85°C.

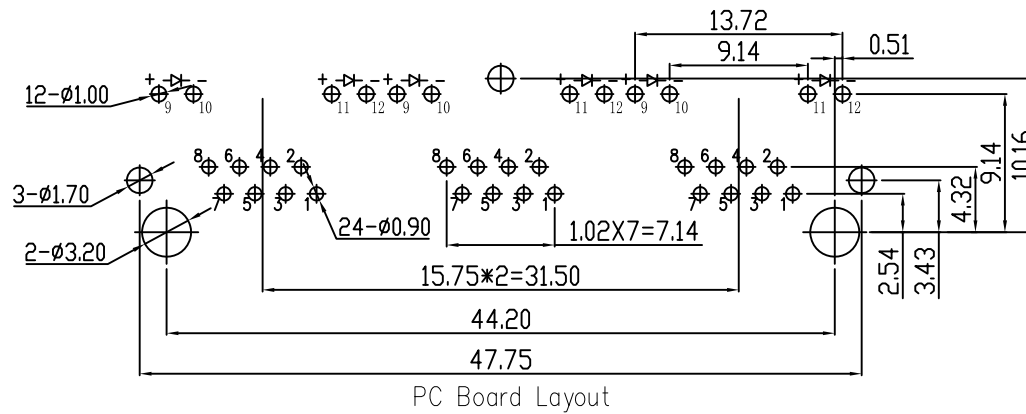

LED L YELLOW



LED R GREEN



P/N:RJ5JA-8813-211111R



PC Board Layout

					GENERAL TOLERANCE		DRAWN		Gene Li		2017/03/11		X-SHUN 东莞市祥舜电子科技有限公司 DONGGUAN X-SHUN ELECTRONIC TECHNOLOGY CO., LTD				
						.X ±0.35	X.° ± 2°	CHECKE		SC			PART NO.		RJ5JA-8813-211111R		
A0		NEW DESIGN		2017/03/11		.XX ±0.25	.X° ± 1°	APPROVE					TITLE:		5JA LED 1X3 8P8C EMI D型(1个后背脚)		
						.XXX ±0.15	.XX° ± 0.5°	PROJECT									
REV	ECN NO	DESCRIPTION		DATE	SIGNATURE			UNIT	mm	SCALE	1:1	SHEET		REV	A0	DRAWING NO.	RJ5JA-015