
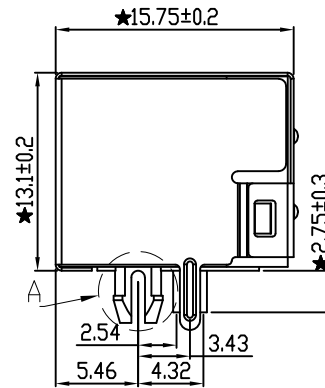

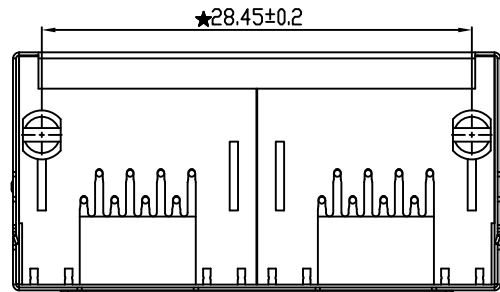
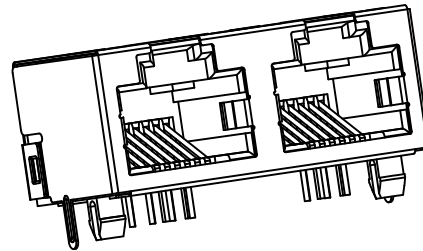


RoHS compliant

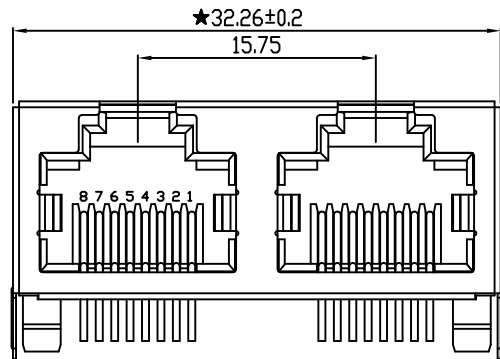

NOTES:

ELECTRICAL:

- VOLTAGE RATING: 125 VAC RMS.
- CURRENT RATING: 1.5 AMP.
- CONTACT RESISTANCE: 30 MILLIOHMS MAX.
- INSULATION RESISTANCE: 500 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH: 1000 VAC RMS 50Hz or 60Hz, 1MIN.

MECHANICAL:


- INSERT MATERIAL: UL94V-0.
- CONTACT MATERIAL: DIAMETER 0.46MM PHOSPHOR BRONZE GOLD PLATING OVER NICKEL.
- SHIELD: 0.20MM THICKNESS H65Y BRASS NICKEL PLATED.
- MATING/UNMATING FORCE: 2.2KG.F MAX.
- RETENTION STRENGTH: 7.7KG.F MIN BETWEEN JACK AND PLUG.
- OPERATING LIFE: 750 CYCLES MIN.

ENVIRONMENTAL:


- STORAGE: -40°C ~ +85°C RELATIVE HUMIDITY<70%.
- OPERATION: -40°C ~ +85°C.

Remark:

1. The mark with★ is the key inspection dimension for QC.

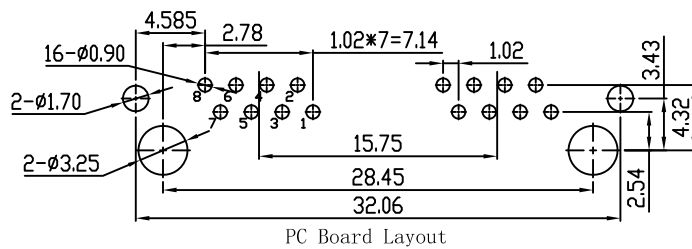

P/N:RJ5JA-8812-100111R

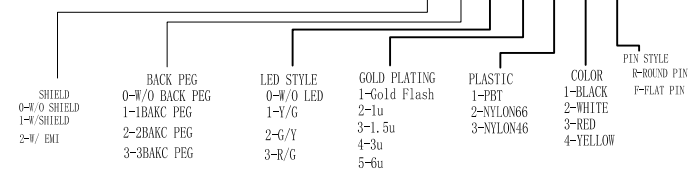

				GENERAL TOLERANCE		DRAWN	<i>Sene Li</i>	2015/06/18	UNIT	MM	<b>东莞市祥舜电子科技有限公司</b> DONGGUAN X-SHUN ELECTRONIC TECHNOLOGY CO., LTD TEL:+86 769 81885389 FAX:+86 769 81887859 E-Mail:sales@x-shun.com Http:www.x-shun.com	
				.X ±0.35	X.° ± 2°	CHECKE	SC		SCALE	1:1		
A0		NEW DESIGN	2015/06/18			APPROVE			SHEET		PART NO.	RJ5JA-8812-100111R
REV	ECN NO	DESCRIPTION	DATE	SIGNATURE	PROJECT	DRAWING NO			REV	A0	TITLE	5JA 1X2 8P8C W/ SHIELD DIP TYPE