

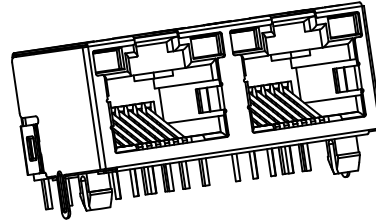
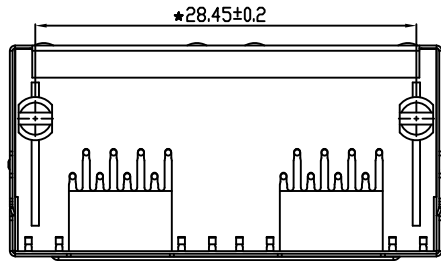

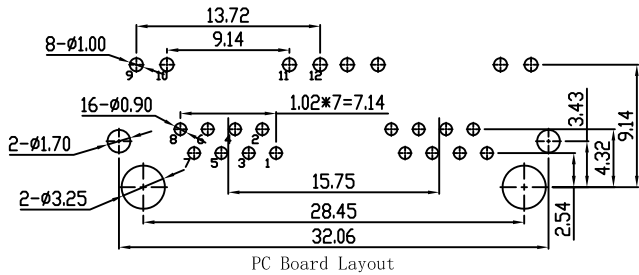
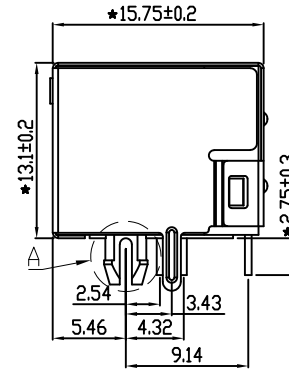


RoHS compliant



- NOTES:
- ELECTRICAL:
- VOLTAGE RATING: 125V AC.
  - CURRENT RATING: 1.5A.
  - CONTACT RESISTANCE: 30 mΩ MAX.
  - INSULATION RESISTANCE: 500 MΩ @ 500V DC.
  - DIELECTRIC STRENGTH: 1000V AC 50Hz or 60Hz, 1MIN.
- MECHANICAL:
- INSERT MATERIAL: UL94V-0.
  - CONTACT MATERIAL: DIAMETER 0.46mm C51000 (QSn4-0.3) PHOSPHOR BRONZE GOLD PLATING OVER NICKEL.
  - SHIELD: 0.20mm THICKNESS H65Y BRASS NICKEL PLATED.
  - MATING/UNMATING FORCE: 2.2KG. F MAX.
  - RETENTION STRENGTH: 5.0KG. F MIN BETWEEN JACK AND PLUG.
  - OPERATING LIFE: 750 CYCLES MIN.
- ENVIRONMENTAL:
- STORAGE: -40°C ~ +85°C RELATIVE HUMIDITY<70%.
  - OPERATION: -40°C ~ +85°C.
- Remark:
- The mark with★ is the key inspection dimension for QC.

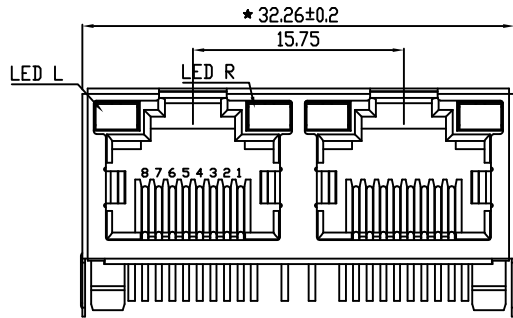

P/N:RJ5JA-8812-10XXXXR

- |           |              |           |          |             |
|-----------|--------------|-----------|----------|-------------|
| LED STYLE | GOLD PLATING | PLASTIC   | COLOR    | PIN STYLE   |
| 0-W/O LED | 1-Gold Flash | 1-PBT     | 1-BLACK  | 0-ROUND PIN |
| 1-V/G     | 2-1u         | 2-NYLON66 | 2-WHITE  | 1-FLAT PIN  |
| 2-G/Y     | 3-1.5u       | 3-NYLON46 | 3-RED    |             |
| 3-R/G     | 4-3u         |           | 4-YELLOW |             |
| 4-V/R     | 5-8u         |           |          |             |

				GENERAL TOLERANCE	DRAWN	<i>Sene Li</i>	2016-03-12	<b>X-SHUN</b> 东莞市祥舜电子科技有限公司 DONGGUAN X-SHUN ELECTRONIC TECHNOLOGY CO., LTD			
				.X ±0.35 X.° ± 2°	CHECKE	SC		PART NO.	RJ5JA-8812-10XXXXR		
				.XX ±0.25 .X° ± 1°	APPROVE			TITLE:	RJ45 8P8C 1X2 W/LED PCB JACK		
				.XXX ±0.15 .XX° ± 0.5°				REV	A0	DRAWING NO.	
REV	ECN NO	DESCRIPTION	DATE	SIGNATURE	PROJECT	UNIT	mm	SCALE	1:1	SHEET	