
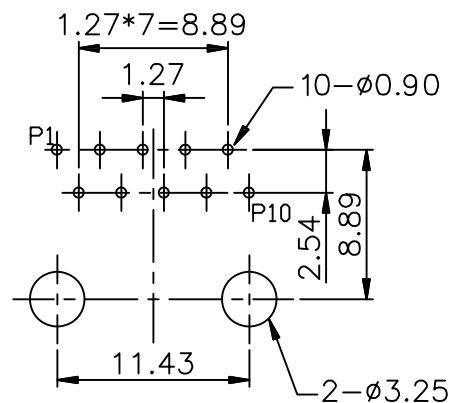
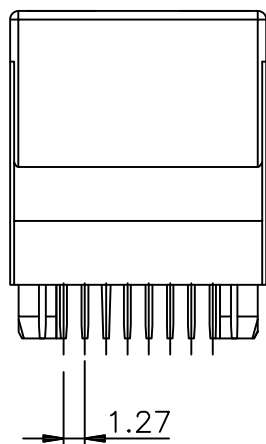


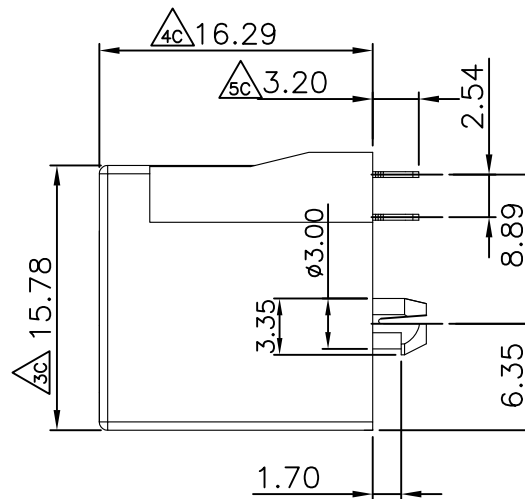

NOTES

MATERIAL

1. HOUSING MATERIAL : GLASS FILLED POLYESTER UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE T=0.35mm.
3. PLATING : CONTACT AREA-SELECTIVE GOLD
PLATING, TAILS PLATING TIN OVER NICKEL.
: 3U", 6U", 15U", 30", 50".

ELECTRICAL

- | | |
|--|-------------------------------|
| 1. VOLTAGE RATING | : 125 VAC RMS. |
| 2. CURRENT RATING | : 1.5 AMP. |
| 3. CONTACT RESISTANCE | : 30 MILLIOHMS MAX. |
| 4. INSULATION RESISTANCE | : 500 MEGOHMS MIN @ 500V DC . |
| 5. DIELECTRIC DIELECTRIC
RESISTANCE | : 1000V AC RMS 50Hz. 1MIN. |

MECHANICAL

1. DURRABILITY : 750 CYCLES MIN.
2. PCB RETENTIONPRE-SOLDER : 1 LB MIN.

ENVIRONMENTAL:

1. STORAGE : -40℃ ~ +85℃.
2. OPERATION : -40℃ ~ +85℃.

P/N: RJ52D-1111-002XXXX

GOLD PLATING
1-Gold Flash
2-1u
3-1.5u
4-3u
5-6u

PLASTIC
1-PBT
2-NYLON66
3-NYLON46

COLOR
1-BLACK
2-WHITE
3-RED
4-YELLOW

NOTE
X-N0 Note

					GENERAL TOLERANCE		DRAWN	Gene Li	2014/03/12	UNIT	MM	X-SHUN 东莞市祥舜电子科技有限公司 DONGGUAN X-SHUN ELECTRONICTECHNOLOGY CO., LTD TEL:+86 769 81885389 FAX:+86 769 81887859 E-Mail:sales@x-shun.com Http:www.x-shun.com			
					.X ±0.35	X.° ±2°	CHECKE	JH		SCALE	1:1				
A0		NEW DESIGN		2014/03/12	.XX ±0.25	.X° ±1°									
					.XXX ±0.15	.XX° ±0.5°	APPROVE			SHEET	1 OF 1	PART NO.	RJ52D-1111-002XXXX		
REV	ECN NO	DESCRIPTION		DATE	SIGNATURE	PROJECT	DRAWING NO			REV	A0	TITLE	52D 180° 10P10C JACK		
1		2		3		4		5		6		7		8	