


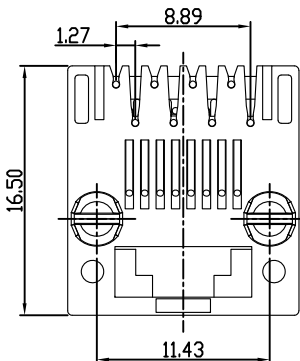
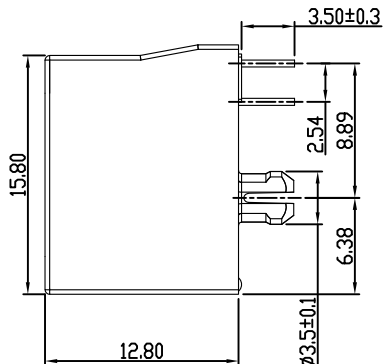
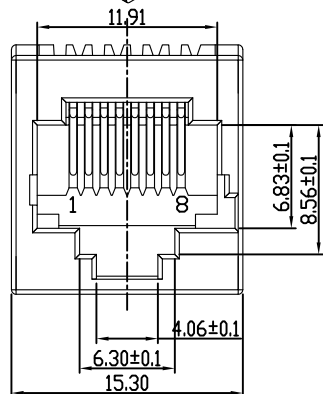




RoHS compliant



Recommend PCB Layout
THICKNESS=1.6mm
TOLERANCES:±0.05

SPECIFICATION NOTES:

ELECTRICAL:

1. VOLTAGE RATING: 125 VAC RMS
2. CURRENT RATING: 1.5 AMP
3. CONTACT RESISTANCE: 30mΩ MAX.
4. INSULATION RESISTANCE: 1000MΩMIN. AT 500V DC.
5. DIELECTRIC STRENGTH: 1000 VAC 50Hz 1MINUTE

MECHANICAL:

- 1.HOUSING MATERIAL:
SEE PART NUMBER.
2. CONTACTS:Ø0.46mm PHOSPHOR BRONZE,GOLD
PLATING OVER NICKEL
3. OPERATING LIFE:750 CYCLES MIN.
4. MATING FORCE: 30N MAX.
UNMATING FORCE: 30N MAX.

ENVIRONMENTAL:

1. STORAGE:-40°C TO +85°C
2. OPERATION: -40°C TO +85°C

PART NUMBER:

P/N 料号	DESCRIPTION 描述	MATER COLOR 材质	GOLD PLATING 电镀
RJ52A-8811-1121111	5222 8P8C 1X1 180° H=12.8 PCB JACK	PBT BLACK 黑	FU"
RJ52A-8811-1121121	5222 8P8C 1X1 180° H=12.8 PCB JACK	PBT WHITE 白	FU"
RJ52A-8811-1121171	5222 8P8C 1X1 180° H=12.8 PCB JACK	PBT BLUE 蓝	FU"

REV	ECN NO	DESCRIPTION	DATE	SIGNATURE	PROJECT	DRAWING NO	REV	A0	TITLE
A0		NEW DESIGN	2019/03/11						SEE TABLE
		增加蓝色料号 (285C)	2022/10/20						5222-8P8C-1X1 H=12.8