
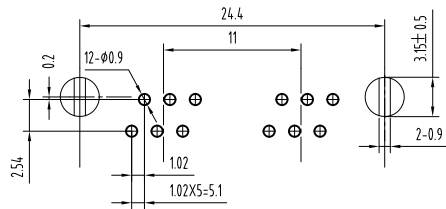
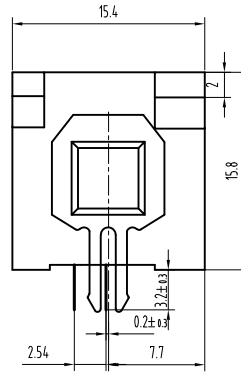
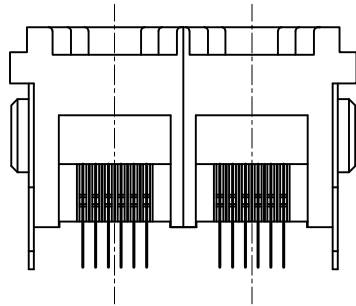


RoHS compliant

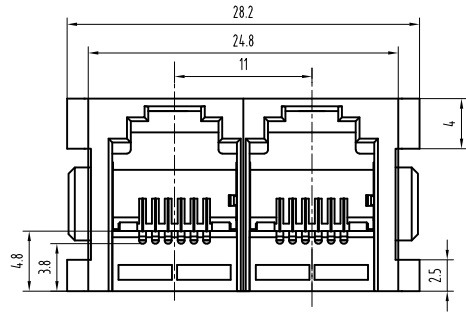

PC Board Layout
Component Side Shown

NOTES:

MATERIAL :

- 1.HOUSING MATERIAL :GLASS FILLED POLYESTER UL94V-0.
- 2.CONTACT MATERIAL :PHOSPHOR BRONZE $\phi 0.45\text{mm}$.
- 3.PLATING :GOLD PLATING OVER NICKEL.
FU",3U",6U",15U",30U",50U"

ELECTRICAL:

- 1.VOLTAGE RATING :125 VAC RMS.
- 2.CURRENT RATING :1.5 AMP.
- 3.CONTACT RESISTANCE :30 MILLIOHMS MAX.
- 4.INSULATION RESISTANCE :500 MEGOHMS MIN @ 500V DC .
- 5.DIELECTRIC WITHSTANDING RESISTANCE :1000V AC RMS 50Hz. 1MIN.

MECHANICAL:

- 1.DURRABILITY :750 CYCLES MIN.
- 2.PCB RETENTION PRE-SOLDER :1 LB MIN.

ENVIRONMENTAL:

- 1. STORAGE : -40°C TO 85°C.
- 2. OPERATION : -40°C TO 85°C.

PN:RJ52B-6612-1211X2X

COLOR
1-BLACK
6-GRAY

NOTE
X-NOTE

				GENERAL TOLERANCE		DRAWN	<i>Sene Li</i>	2017/05/19	UNIT	MM	东莞市祥舜电子科技有限公司 DONGGUAN X-SHUN ELECTRONICTECHNOLOGY CO., LTD TEL:+86 769 81885389 FAX:+86 769 81887859 E-Mail:sales@x-shun.com Http:www.x-shun.com	
				.X	± 0.35	X. $^{\circ}$	$\pm 2^{\circ}$	CHECKE	JS	SCALE		1:1
A0		NEW DESIGN	2017/05/19			APPROVE			SHEET	1 OF 1	PART NO.	RJ52B-6612-1211X2X
REV	ECN NO	DESCRIPTION	DATE	SIGNATURE	PROJECT	DRAWING NO			REV	A0	TITLE	5225-6P6C-1X2-180°带铁脚