
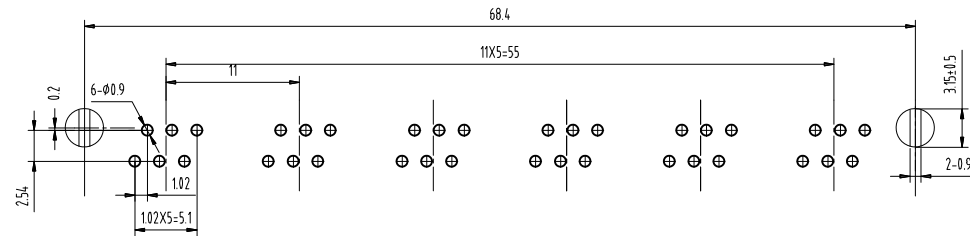
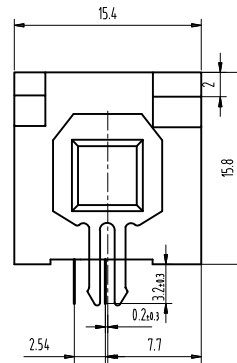
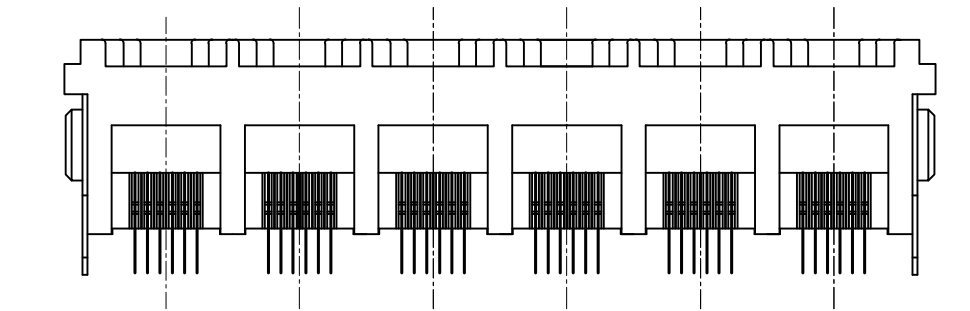


RoHS compliant

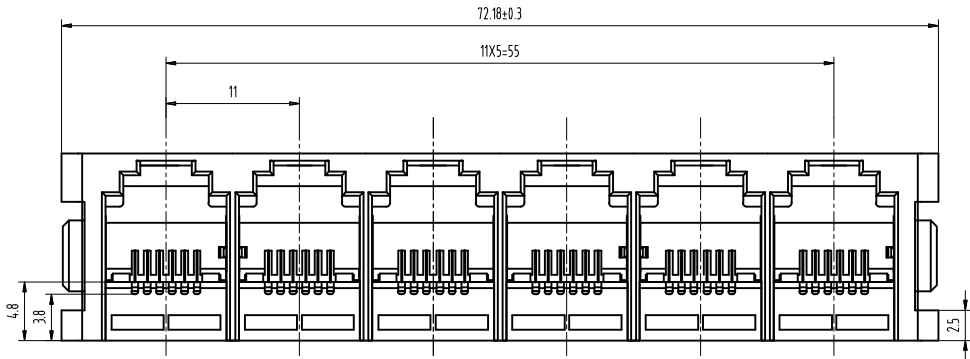

PC Board Layout
Component Side Shown

NOTES:

1. HOUSING MATERIAL: GLASS FILLED POLYESTER UL94V-0.
2. CONTACT MATERIAL: PHOSPHOR BRONZE $\phi 0.46\text{mm}$.
3. PLATING: GOLD PLATING $50\mu\text{m}$ OVER NICKEL.

ELECTRICAL:

1. VOLTAGE RATING: 125 VAC RMS.
2. CURRENT RATING: 1.5 AMP.
3. CONTACT RESISTANCE: 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 500 MEGOHMS MIN @ 500V DC.
5. DIELECTRIC WITHSTANDING RESISTANCE: 1000VAC RMS 60Hz 1MIN.

MECHANICAL:

1. DURABILITY : 750 CYCLES MIN.
2. PCB RETENTION PRE-SOLDER

ENVIRONMENTAL:

1. STORAGE: -40°C TO $+85^{\circ}\text{C}$.
2. OPERATION: 0°C TO 70°C .

PN: RJ52B-6616-1211X1X

COLOR
1-BLACK
6-GRAY

NOTE
X-NOTE

				GENERAL TOLERANCE		DRAWN		Gene Li		2019/08/22		东莞市祥舜电子科技有限公司 DONGGUAN X-SHUN ELECTRONIC TECHNOLOGY CO., LTD															
				.X ±0.35 X.° ± 2°		CHECKE		JS								PART NO. RJ52B-6616-1211X1X											
A0				NEW DESIGN		2019/08/22						TITLE: 5225-1X6-6P6C 180° W/PEG															
REV		ECN NO		DESCRIPTION		DATE		SIGNATURE		PROJECT		UNIT		mm		SCALE		1:1		SHEET		REV		A0		DRAWING NO.	