
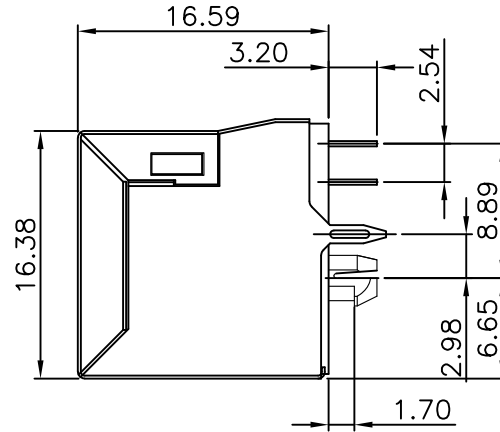


RoHS compliant

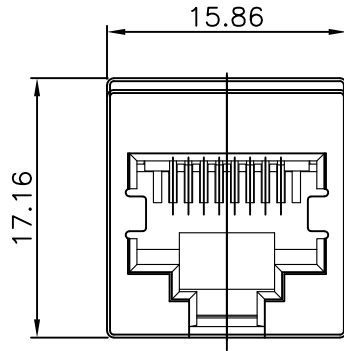

NOTES

MATERIAL

1. HOUSING MATERIAL : GLASS FILLED POLYESTER UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE T=0.35mm.
3. PLATING : CONTACT AREA-SELECTIVE GOLD
TAILS PLATING TIN OVER NICKEL.
: 3U", 6U", 15U", 30", 50".

ELECTRICAL



1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500V DC .
5. DIELECTRIC DIELECTRIC RESISTANCE : 1000V AC RMS 50Hz. 1MIN.

MECHANICAL

1. DURRABILITY : 750 CYCLES MIN.
2. PCB RETENTIONPRE-SOLDER : 1 LB MIN.

ENVIRONMENTAL :

1. STORAGE : -40°C ~ +85°C.
2. OPERATION : -40°C ~ +85°C.

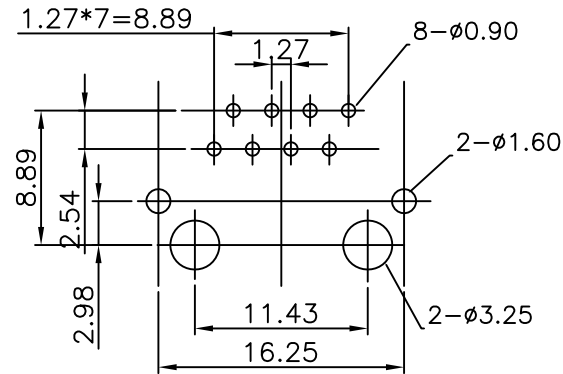

PCB LAYOUT/TOP VIEW

P/N: RJ52D-1811-122511X

GOLD PLATING
1-Gold Flash
2-1u
3-1.5u
4-3u
5-6u
PLASTIC
1-PBT
2-NYLON66
3-NYLON46
COLOR
1-BLACK
2-WHITE
3-RED
4-YELLOW
NOTE
X=NO Note

					GENERAL TOLERANCE		DRAWN		Gene Li		2017/03/14		X-SHUN 东莞市祥舜电子科技有限公司 DONGGUAN X-SHUN ELECTRONIC TECHNOLOGY CO., LTD			
						.X ±0.35 X.° ± 2°	CHECKE		JH				PART NO. RJ52D-1811-122511X			
A0		NEW DESIGN	2017/03/14			.XX ±0.25 .X.° ± 1°	APPROVE						TITLE: RJ45 10P8C 180° W/SHIELD B2. 98			
REV	ECN NO	DESCRIPTION	DATE	SIGNATURE	PROJECT	 	UNIT	mm	SCALE	1:1	SHEET	1/1	REV	A0	DRAWING NO.	RJ52D-02