

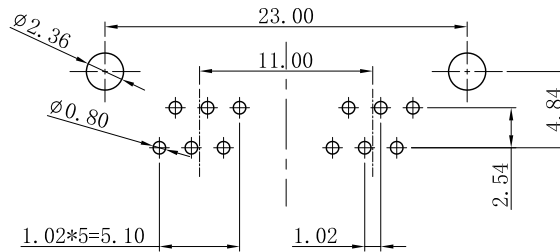
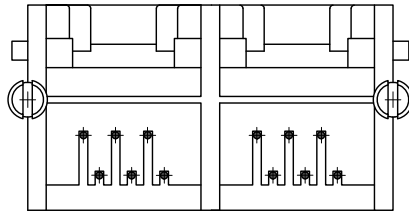
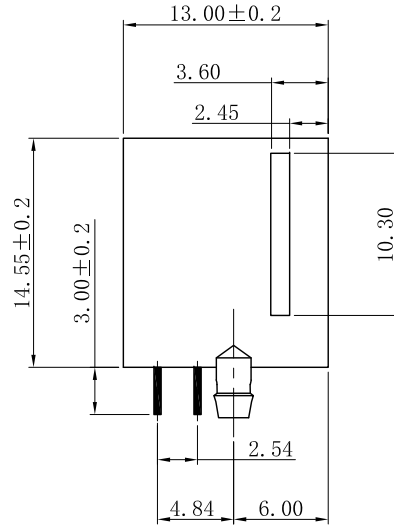


RoHS compliant

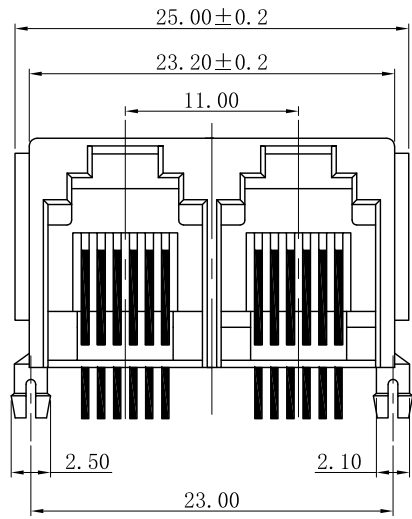

PC Board Layout
Component Side Shown

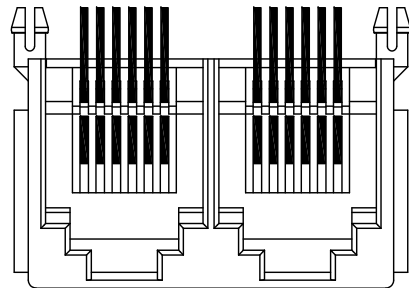


材料Material:

1. 外壳材质: PBT, PA66, PA46 (UL 94V-0)
Housing Material: PBT, PA66, PA46 (UL 94V-0)
2. 触点材料: 圆针直径0.46mm磷青铜; 镀镍后镀金
Contact Material: Round Pins-0.46mm Diameter
Phosphor Bronze;
Gold Plating Over Nickel

电气Electrical

1. 额定电压: 交流125伏
Voltage Rating : 125 VAC Rms
2. 额定电流: 1.5安培
Current Rating: 1.5 AMP
3. 接触电阻: 最大30毫欧
Contact Resistance: 30 Milliohms MaX
4. 绝缘电阻: 直流500V下, 绝缘最小500兆欧
Insulation Resistance: 500 megohms min @500V DC
5. 绝缘耐压: 交流60Hz 1000V下, 1分钟
Dielectric Withstanding
Resistance: 1000V AC Rms 60Hz. 1Min
6. 耐久: 插拔750次以上
Durability: 750 Cycles Min
7. 工作温度: -40℃~+85℃
Operation Temperature: -40℃~+85℃

P/N:RJ55A-6612-2X1X12

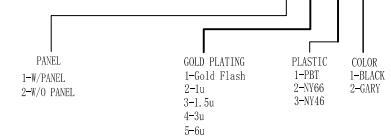

				GENERAL TOLERANCE	DRAWN	<i>Sene Li</i>	2019/07/21	东莞市祥舜电子科技有限公司 DONGGUAN X-SHUN ELECTRONIC TECHNOLOGY CO., LTD						
				.X ±0.35 X.° ± 2°	CHECKE	HL						PART NO.	RJ55A-6612-2X1X12	
A0		NEW DESIGN	2019/07/21	.XX ±0.25 .X° ± 1°	APPROVE			TITLE:	5521 1X2 6P6C 缺口有边					
REV	ECN NO	DESCRIPTION	DATE	SIGNATURE	PROJECT	UNIT	mm	SCALE	1:1	SHEET	REV	A0	DRAWING NO.	RJ55A-013