*RoHS compliant*

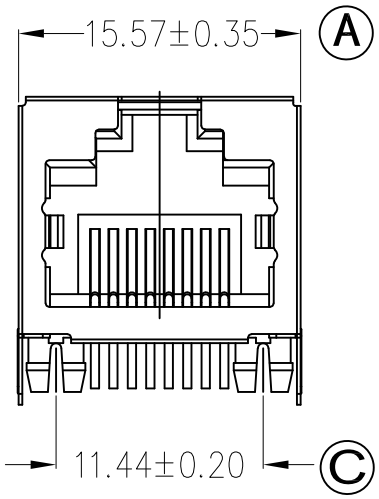


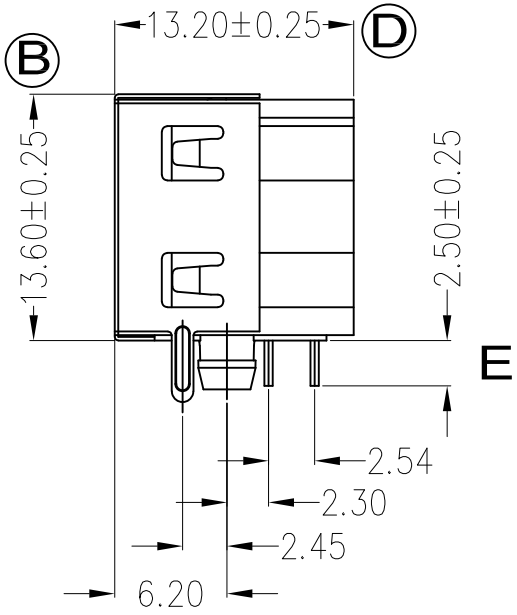


PRODUCT SPECIFICUTION

ELECTRICAL:
1. INSULATION RESISTANCE:500 MEGOHMS MIN @ 500V DC
2. DIELECTRIC WITHSTANDING RESISTANCE:1000V AC RMS 50HZ.1MIN
3. CONTACT RESISTANCE:50 MILLIOHMS MAX
4. VOLTAGE RATING:125 VAC RMS
5. CURRENT RATING:1.5 AMP

MECHANICAL:
1. DURRABILIYY:750 CYCLES MIN
2. PCB RETENTION PRE-SOLDER:1 LB MIN

ENVIRONMENTAL:
1. STORAGE:-40-85℃
2. OPERATION:0-70℃
3. HUMIDITY:<80%

MATERIAL;
1. HOUSINGS:PA9T UL94V-0
2. CONTACTS:⌀0.46mm PHOSPHOR BRONZE, GOLD PLATING OVER NICKEL
3. SHIELD:COPPER ALLOY 0.20mm THICKNESS PLATING NI



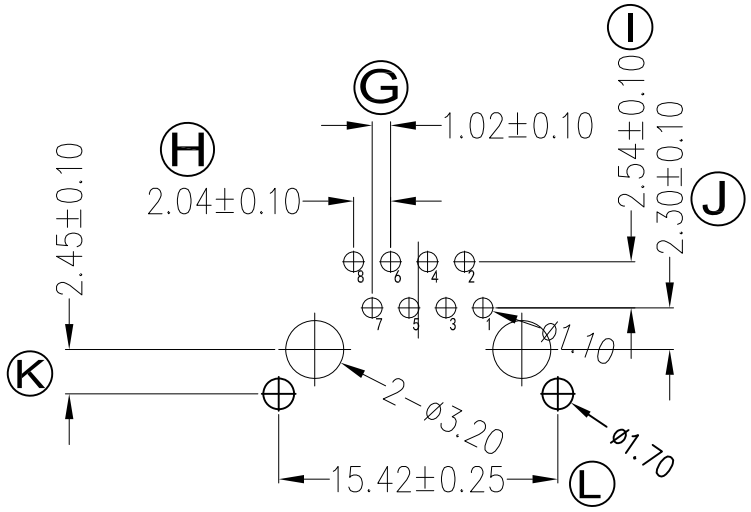


P/N:RJ55D-8811-12111X

CONTACTS(金针根数):
1-1.2.3.6 PIN;8-8CONTACTS(8C)
GOLD PLATING(镀金厚度):
1-FU";2-1U";3-1.5U";4-3U";
5-6U";6-15U";
PLASTIC(塑料):
1-PBT;
2-NYLON66(尼龙66);
3-NYLON46(尼龙46)
COLOR(颜色):
1-BLACK(黑色);2-WHITE(白色);3-RED(红色);
4-YELLOE(黄色);5-BLUE(蓝色);6-GREEN(绿色)
NOTE(备注):
X-NO NOTE

| | | | | | GENERAL TOLERANCE | | | DRAWN | Gene Li | 2016-03-12 | UNIT | MM | X-SHUN 东莞市祥舜电子科技有限公司 DONGGUAN X-SHUN ELECTRONICTECHNOLOGY CO., LTD |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | .X ±0.35 | X.° ± 2° | | CHECKE | YZ | | SCALE | 1:1 | TEL:+86 769 81885389 FAX:+86 769 81887859 E-Mail:sales@x-shun.com Http:www.x-shun.com |
| A0 | | NEW DESIGN | 2016-03-12 | | .XX ±0.25 | .X° ± 1° | | APPROVE | | | SHEET | 1 OF 1 | PART NO. RJ55D-8811-12111X |
| REV | ECN NO | DESCRIPTION | DATE | SIGNATURE | .XXX ±0.15 | .XX° ± 0.5° | PROJECT | DRAWING NO | | | REV | A0 | TITLE 5524S-H-1X1 8P8C JACK |