
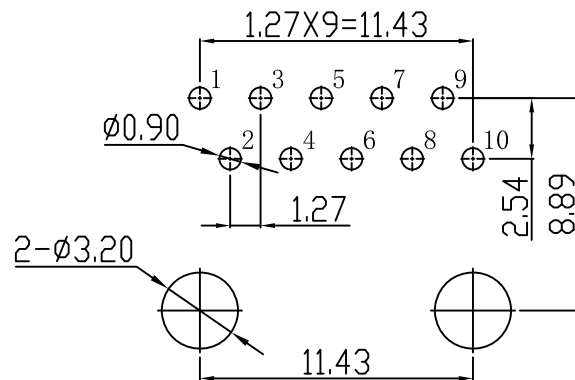
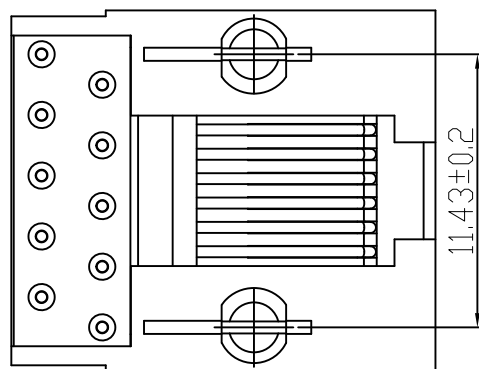
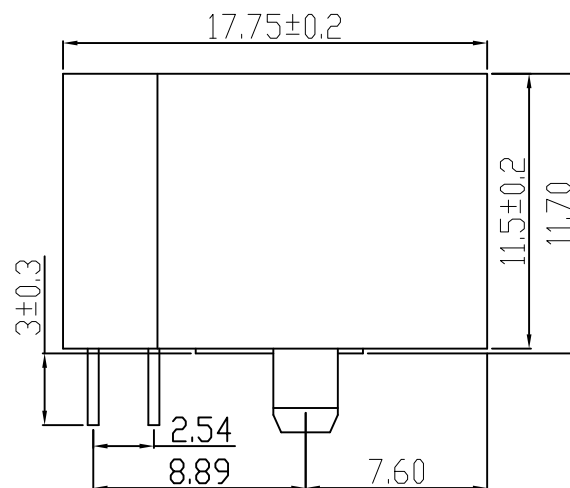


RoHS compliant

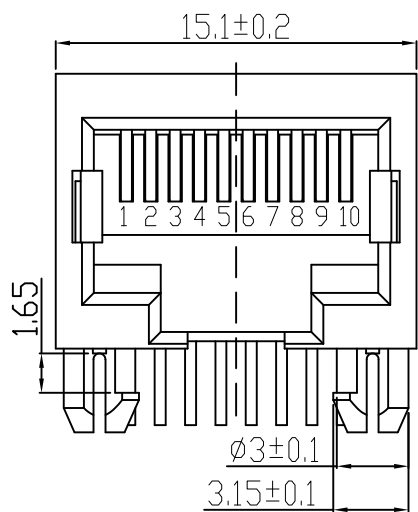

PC Board Layout

NOTES:

ELECTRICAL:

1. VOLTAGE RATING: 125V AC.
2. CURRENT RATING: 1.5A.
3. CONTACT RESISTANCE: 30 mΩ MAX.
4. INSULATION RESISTANCE: 500 MΩ MIN @ 500V DC.
5. DIELECTRIC STRENGTH: 1000V AC 50Hz or 60Hz, 1MIN.


MECHANICAL:

1. INSERT MATERIAL: UL94V-0.
2. CONTACT MATERIAL: $\phi 0.46$ mm C51000 (QSn4-0.3) PHOSPHOR BRONZE GOLD PLATING OVER NICKEL.
3. MATING/UNMATING FORCE: 2.2KG. F MAX.
4. RETENTION STRENGTH: 3.0KG. F MIN BETWEEN JACK AND PLUG.
5. OPERATING LIFE: 750 CYCLES MIN.

ENVIRONMENTAL:

1. STORAGE: -40°C ~ +85°C RELATIVE HUMIDITY < 70%.
2. OPERATION: -40°C ~ +85°C.

P/N: RJ56B-1111-0000111

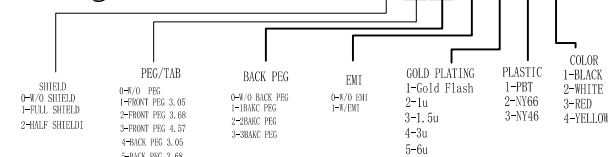

				GENERAL TOLERANCE		DRAWN	<i>Sene Li</i>	2016/12/10	UNIT	MM	X-SHUN 东莞市祥舜电子科技有限公司 DONGGUAN X-SHUN ELECTRONICTECHNOLOGY CO., LTD TEL: +86 769 81885389 FAX: +86 769 81887859 E-Mail: sales@x-shun.com Http: www.x-shun.com	
				.X ±0.35	X.° ±2°	CHECKE	SC		SCALE	1:1		
				.XX ±0.25	.X° ±1°	APPROVE			SHEET			
A0		NEW DESIGN	2016/12/10								PART NO.	RJ56B-1111-0000111
REV	ECN NO	DESCRIPTION	DATE	SIGNATURE	PROJECT	DRAWING NO			REV	A0	TITLE	5622 1X1 10P10C