
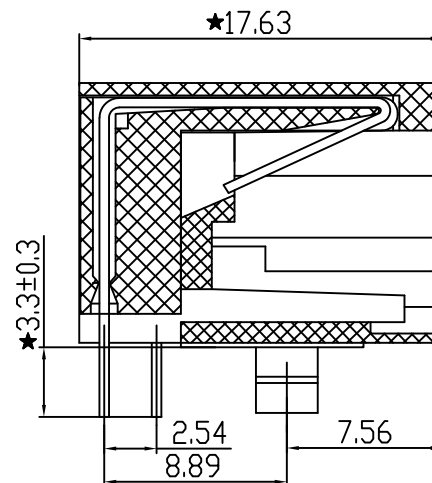


RoHS compliant

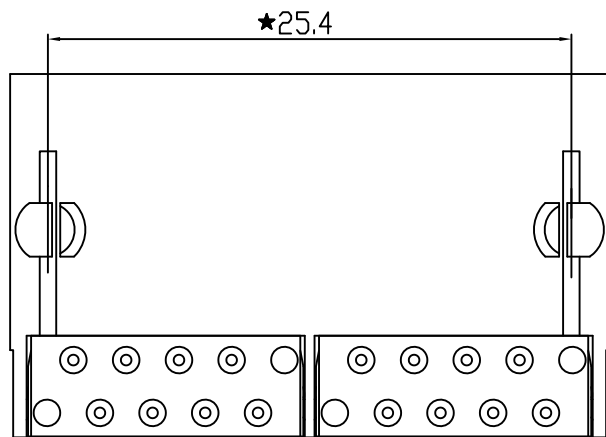

NOTES:

ELECTRICAL:

- 1. VOLTAGE RATING : 125 VAC RMS.
- 2. CURRENT RATING : 1.5 AMP.
- 3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- 4. INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500 VDC.
- 5. DIELECTRIC STRENGTH : 1000 VAC RMS 50Hz or 60Hz, 1MIN.

MECHANICAL:



- 1. HOUSING & INSERT MATERIAL : PBT UL94V-0.
- 2. CONTACT MATERIAL : DIAMETER 0.45MM PHOSPHOR BRONZE GOLD PLATING OVER NICKEL.
- 3. MATING/UNMATING FORCE : 2.2KG.F MAX.
- 4. RETENTION STRENGTH : 7.7KG.F MIN BETWEEN JACK AND PLUG.
- 5. OPERATING LIFE : 600 CYCLES MIN.

ENVIRONMENTAL:


- 1. STORAGE : -10°C ~ +40°C RELATIVE HUMIDITY<70%.
- 2. OPERATION : -40°C ~ +85°C.

Remark:

- 1. Tolerances Unless Otherwise Specified
.0±0.25 .00±0.20 .000±0.10
- 2. The mark with ★ is the key inspection dimension for QC

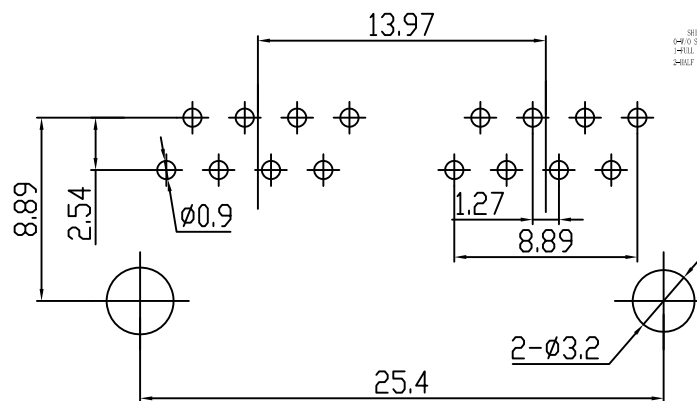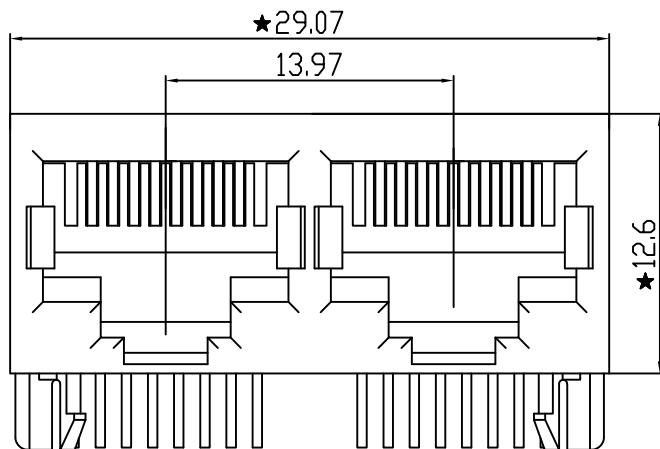

P/N:RJ56A-1812-0000XXX



PC Board Layout

				GENERAL TOLERANCE		DRAWN	Gene Li	UNIT	X-SHUN 东莞市祥舜电子科技有限公司 DONGGUAN X-SHUN ELECTRONICTECHNOLOGY CO., LTD TEL:+86 769 81885389 FAX:+86 769 81887859 E-Mail:sales@x-shun.com Http:www.x-shun.com		
				.X	±0.25	X.°	± 2°	CHECKE	SC	PART NO.	RJ56A-1812-0000XXX
				.XX	±0.20	.X.°	± 1°	APPROVE		TITLE	5621 10P8C-1X2 全塑
				.XXX	±0.10	.XX.°	± 0.5°	DRAWING NO		REV	
REV	ECN NO	DESCRIPTION	DATE	SIGNATURE	PROJECT		DRAWING NO				
1			2016/06/15								