
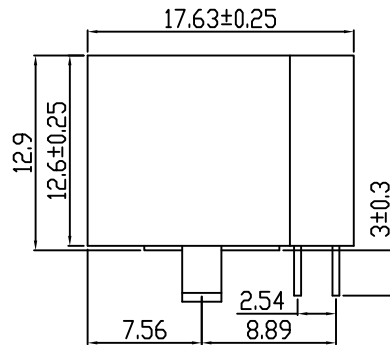
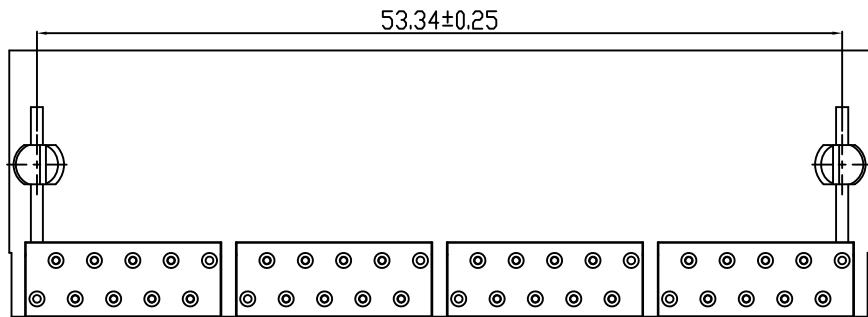



RoHS compliant

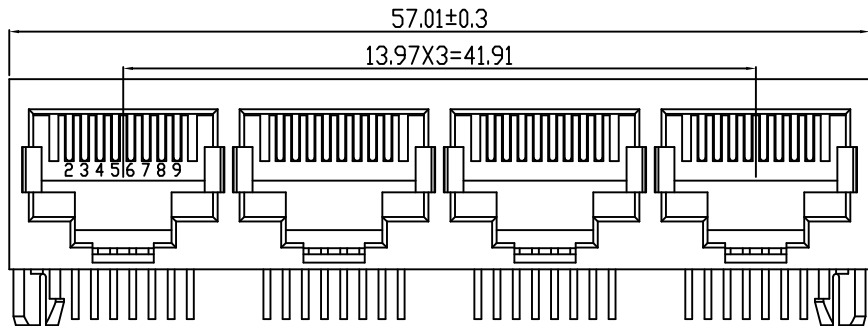

PC Board Layout

- NOTES:
- ELECTRICAL:
- VOLTAGE RATING: 125V AC.
 - CURRENT RATING: 1.5A.
 - CONTACT RESISTANCE: 30 mΩ MAX.
 - INSULATION RESISTANCE: 500 MΩ MIN @ 500V DC.
 - DIELECTRIC STRENGTH: 1000V AC 50Hz or 60Hz, 1MIN.
- MECHANICAL:
- INSERT MATERIAL: UL94V-0.
 - CONTACT MATERIAL: DIAMETER 0.46mm C51000(QSn4-0.3)PHOSPHOR BRONZE GOLD PLATING OVER NICKEL.
 - MATING/UNMATING FORCE: 2.2KG.F MAX.
 - RETENTION STRENGTH: 5.0KG.F MIN BETWEEN JACK AND PLUG.
 - OPERATING LIFE: 750 CYCLES MIN.
- ENVIRONMENTAL:
- STORAGE: -40°C ~ +85°C RELATIVE HUMIDITY<70%.
 - OPERATION: -40°C ~ +85°C.

P/N:RJ56A-1814-0000XXX

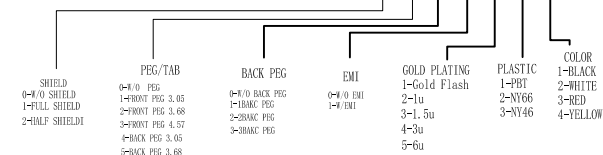

					GENERAL TOLERANCE		DRAWN	<i>Sene Li</i>	2014-04-16	UNIT	MM	X-SHUN 东莞市祥舜电子科技有限公司 DONGGUAN X-SHUN ELECTRONIC TECHNOLOGY CO., LTD		
					.X	±0.35	X.°	± 2°	CHECKE	SC	SCALE	1:1	TEL:+86 769 81885389	FAX:+86 769 81887859
					.XX	±0.25	.X°	± 1°	APPROVE		SHEET	1 OF 1	E-Mail:sales@x-shun.com	Http:www.x-shun.com
A0		NEW DESIGN	2014-04-16		.XXX	±0.15	.XX°	± 0.5°			PART NO.	RJ56A-1814-0000XXX		
REV	ECN NO	DESCRIPTION	DATE	SIGNATURE	PROJECT				DRAWING NO		REV	A0	TITLE	5621 1X4 10P8C