

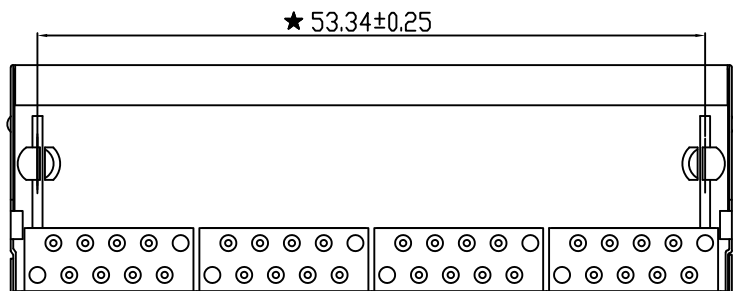


RoHS compliant

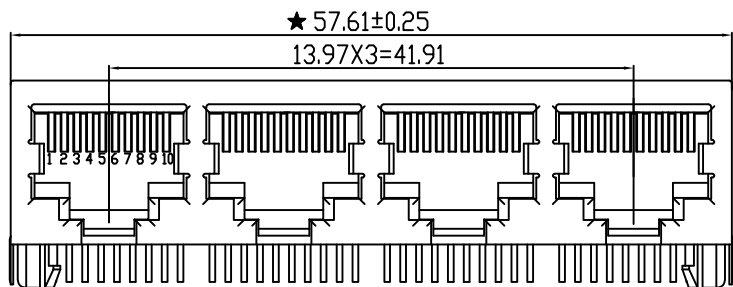

NOTES:

ELECTRICAL:

- VOLTAGE RATING: 125V AC.
- CURRENT RATING: 1.5A.
- CONTACT RESISTANCE: 30 mΩ MAX.
- INSULATION RESISTANCE: 500 MΩ MIN @ 500V DC.
- DIELECTRIC STRENGTH: 1000V AC 50Hz or 60Hz, 1MIN.

MECHANICAL:


- INSERT MATERIAL: UL94V-0.
- CONTACT MATERIAL: DIAMETER 0.46mm C51000(QSn4-0.3)PHOSPHOR BRONZE GOLD PLATING OVER NICKEL.
- SHIELD: 0.20mm THICKNESS H65Y BRASS NICKEL PLATED.
- MATING/UNMATING FORCE: 2.2KG.F MAX.
- RETENTION STRENGTH: 5.0KG.F MIN BETWEEN JACK AND PLUG.
- OPERATING LIFE: 750 CYCLES MIN.

ENVIRONMENTAL:

- STORAGE: -40°C ~ +85°C RELATIVE HUMIDITY<70%.
- OPERATION: -40°C ~ +85°C.


Remark:

1.The mark with★is the key inspection dimension for QC.

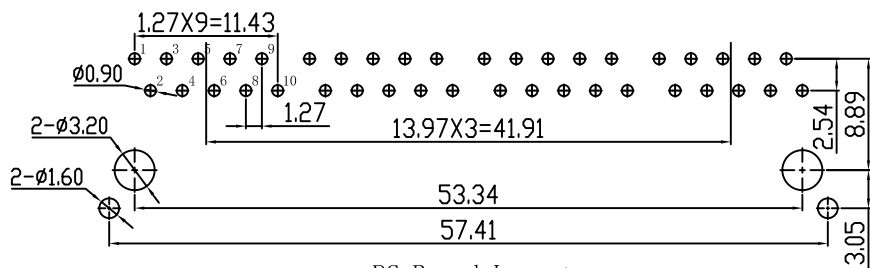

PC Board Layout

P/N:RJ56A-1114-1100XXX

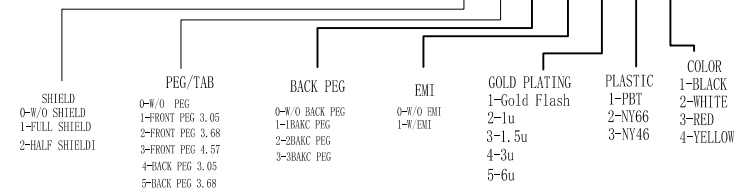

REV	ECN NO	DESCRIPTION	DATE	SIGNATURE	PROJECT	DRAWING NO	REV	A0	TITLE
		NEW DESIGN	2016/06/15						

GENERAL TOLERANCE

.X ±0.25 X.° ± 2°
 .XX ±0.20 .X° ± 1°
 .XXX ±0.10 .XX° ± 0.5°

DRAWN

Gene Li

2016-06-15

UNIT

MM

CHECKE

SC

SCALE

1:1

APPROVE

SHEET

1 OF 1

DRAWING NO

REV

A0

X-SHUN 东莞市祥舜电子科技有限公司
 DONGGUAN X-SHUN ELECTRONIC TECHNOLOGY CO., LTD
 TEL:+86 769 81885389 FAX:+86 769 81887859
 E-Mail:sales@x-shun.com Http://www.x-shun.com

PART NO. RJ56A-1114-1100XXX

TITLE 5621S 1X4 10P10C F3.05(无后背脚)