
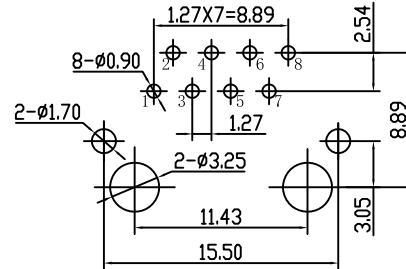

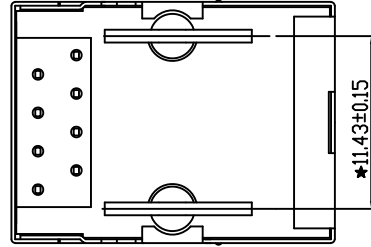


RoHS compliant

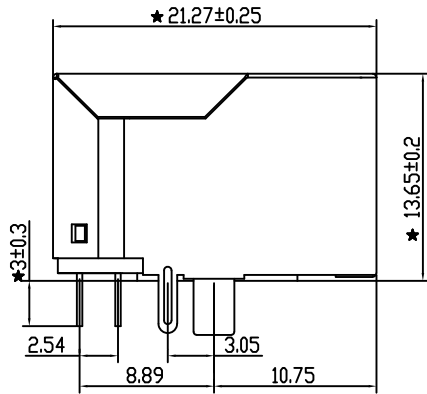

PC Board Layout

NOTES

MATERIAL

- 1. HOUSING MATERIAL : UL94V-0.
- 2. CONTACT MATERIAL : PHOSPHOR BRONZE ϕ 0.46mm.
- 3. PLATING : GOLD PLATING OVER NICKEL.
- : FU", 3U", 6U", 15U", 30U", 50U".

ELECTRICAL

- 1. VOLTAGE RATING : 125 VAC RMS.
- 2. CURRENT RATING : 1.5 AMP.
- 3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- 4. INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500V DC .
- 5. DIELECTRIC DIELECTRIC RESISTANCE : 1000V AC RMS 50Hz. 1MIN.

MECHANICAL

- 1. DURRABILITY : 750 CYCLES MIN.
- 2. PCB RETENTIONPRE-SOLDER : 1 LB MIN.

ENVIRONMENTAL:

- 1. STORAGE : -40°C ~ +85°C.
- 2. OPERATION : -40° C TO 85° C.

Remark:

1. The mark with★ is the key inspection dimension for QC

P/N:RJ59A-8811-14020XXXXR

- GOLD PLATING
- 1-Gold Flash
- 2-1u
- 3-1.5u
- 4-3u
- 5-6u
- PLASTIC
- 1-PBT
- 2-NYLON66
- 3-NYLON46
- COLOR
- 1-BLACK
- 2-WHITE
- 3-RED
- 4-YELLOW

				GENERAL TOLERANCE		DRAWN	<i>Sene Li</i>	2017/03/21	UNIT	MM	东莞市祥舜电子科技有限公司 DONGGUAN X-SHUN ELECTRONIC TECHNOLOGY CO., LTD TEL:+86 769 81885389 FAX:+86 769 81887859 E-Mail:sales@x-shun.com Http:www.x-shun.com	
				.X ±0.35	X.° ± 2°	CHECKE	SC		SCALE	1:1		
A0		NEW DESIGN	2017/03/21			APPROVE			SHEET		PART NO.	RJ59A-8811-14020XXXXR
REV	ECN NO	DESCRIPTION	DATE	SIGNATURE	PROJECT	DRAWING NO			REV	A0	TITLE	5921-1X1-8P8C-B3.05