
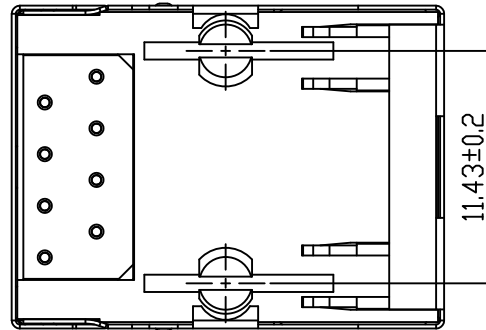
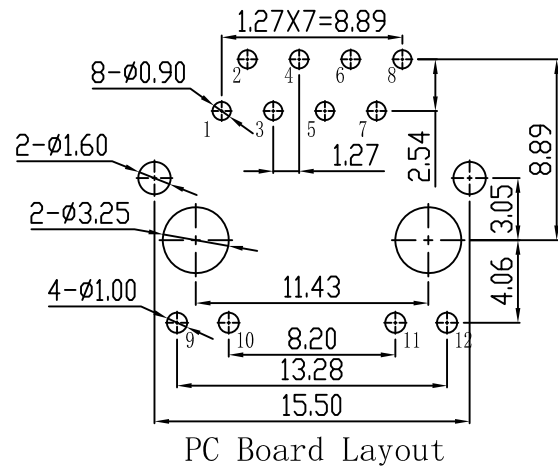
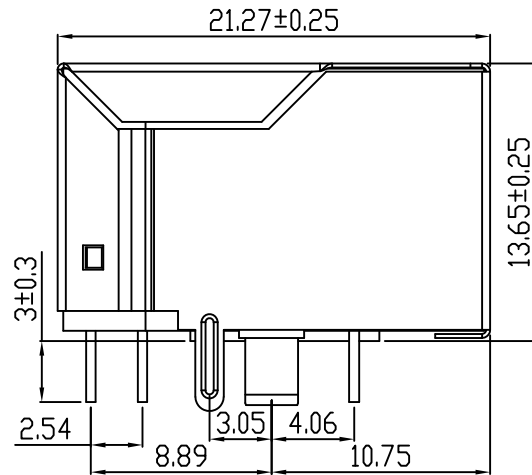


RoHS compliant

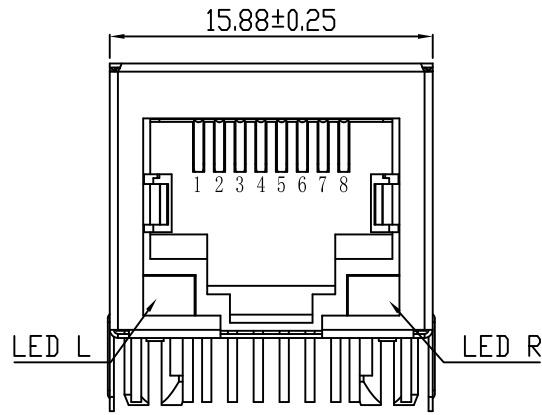

NOTES:

ELECTRICAL:

- VOLTAGE RATING: 125V AC.
- CURRENT RATING: 1.5A.
- CONTACT RESISTANCE: 30 mΩ MAX.
- INSULATION RESISTANCE: 500 MΩ MIN @ 500V DC.
- DIELECTRIC STRENGTH: 1000V AC 50Hz or 60Hz, 1MIN.

MECHANICAL:

- INSERT MATERIAL: UL94V-0.
- CONTACT MATERIAL: DIAMETER 0.46mm C51000 (QSn4-0.3) PHOSPHOR BRONZE GOLD PLATING OVER NICKEL.
- SHIELD: 0.20mm THICKNESS H65Y BRASS NICKEL PLATED.
- MATING/UNMATING FORCE: 2.2KG.F MAX.
- RETENTION STRENGTH: 5.0KG.F MIN BETWEEN JACK AND PLUG.
- OPERATING LIFE: 750 CYCLES MIN.

ENVIRONMENTAL:

- STORAGE: -40°C ~ +85°C RELATIVE HUMIDITY<70%.
- OPERATION: -40°C ~ +85°C.

LED COLOUR DISPLAY  
LED 极性示意图

S/N	LEFT LED	RIGHT LED
图一	YELLOW 9 → 10	GREEN 11 → 12
图二	GREEN 9 → 10	YELLOW 11 → 12
图三	GREEN 9 → 10 ORANGE	YELLOW 11 → 12
图四	GREEN 9 → 10	GREEN 11 → 12

PART NUMBER:

P/N 料号	DESCRIPTION 描述	MATER COLOR 材质	GOLD PLATING 电镀	LED COLOUR DISPLAY LED 极性说明
RJ59A-8811-14021111R	5921S LED 1X1 8P8C B3.05 PCB JACK	PBT BLACK 黑	GF*	图一
RJ59A-8811-14022111R	5921S LED 1X1 8P8C B3.05 PCB JACK	PBT BLACK 黑	GF*	图二

REV	ECN NO	DESCRIPTION	DATE	SIGNATURE	PROJECT	DRAWING NO	REV	A0	TITLE
A0		NEW DESIGN	2018/05/18						5921S LED 1X1 8P8C B3.05

**X-SHUN** 东莞市祥舜电子科技有限公司  
DONGGUAN X-SHUN ELECTRONIC TECHNOLOGY CO., LTD  
TEL:+86 769 81885389 FAX:+86 769 81887859  
E-Mail:sales@x-shun.com Http:www.x-shun.com

PART NO. SEE TABLE

GENERAL TOLERANCE  
.X ±0.35 X.° ± 2°  
.XX ±0.25 .X.° ± 1°  
.XXX ±0.15 .XX.° ± 0.5°

DRAWN Gene Li 2018-05-08 UNIT MM  
CHECKE SC SCALE 1:1  
APPROVE SHEET