

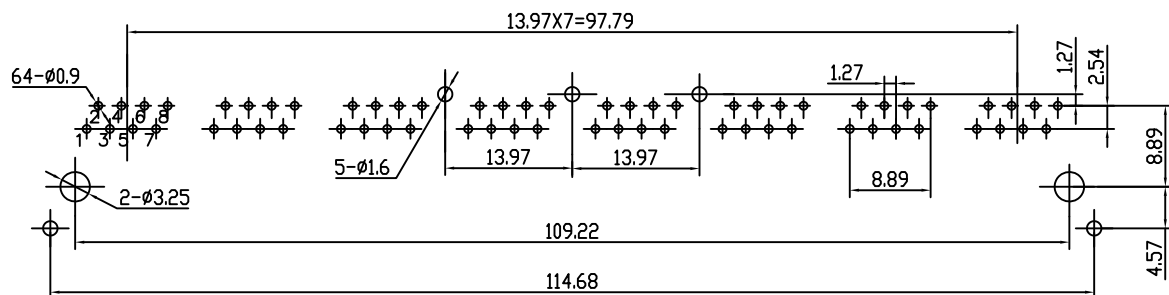


RoHS compliant

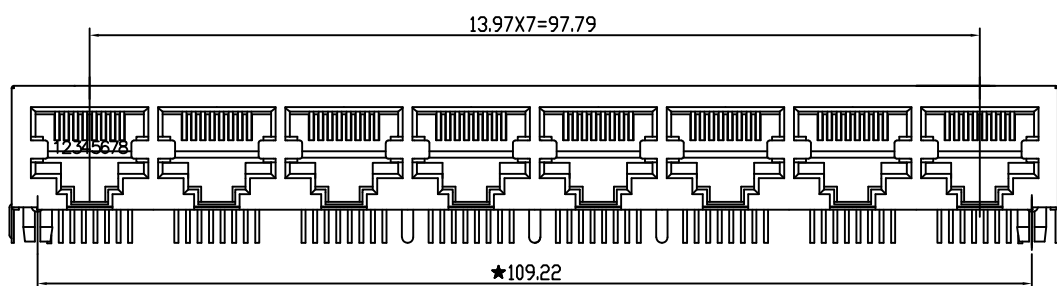


PC Board Layout

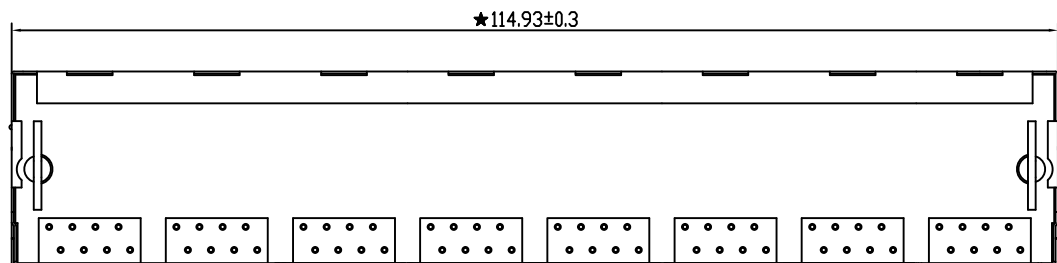

NOTES

- MATERIAL**
 1.HOUSING MATERIAL : GLASS FILLED POLYESTER
 UL94V-0.
 2.CONTACT MATERIAL : PHOSPHOR BRONZE Ø0.46mm.
 3.PLATING : GOLD PLATING OVER NICKEL.
 : FU",3U",6U",15U",30",50".
 4.SHIELD ALLOY : 0.20mm THICKNESS COPPER
 WITH NICKEL PLATED.
- ELECTRICAL**
 1.VOLTAGE RATING : 125 VAC RMS.
 2.CURRENT RATING : 1.5 AMP.
 3.CONTACT RESISTANCE : 30 MILLIOHMS MAX.
 4.INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500V DC
 5.DIELECTRIC DIELECTRIC RESISTANCE : 1000V AC RMS 50Hz. 1MIN.
- MECHANICAL**
 1.DURRABILITY : 750 CYCLES MIN.
 2.PCB RETENTIONPRE-SOLDER : 1 LB MIN.
- ENVIRONMENTAL:**
 1.STORAGE : -40℃ ~ +85℃.
 2.OPERATION : -40℃ ~ +85℃.



				GENERAL TOLERANCE		DRAWN	Gene Li	2014-07-13	UNIT	MM	X-SHUN 东莞市祥舜电子科技有限公司 DONGGUAN X-SHUN ELECTRONICTECHNOLOGY CO., LTD TEL:+86 769 81885389 FAX:+86 769 81887859 E-Mail:sales@x-shun.com Http:www.x-shun.com	
				.X ±0.15	X.° ± 2°	CHECKE	SC		SCALE	1:1		
A0		NEW DESIGN	2014/07/13	.XX ±0.10	.X° ± 1°	APPROVE			SHEET	1 OF 1	PART NO.	RJ59A-8818-13320111R
REV	ECN NO	DESCRIPTION	DATE	SIGNATURE	PROJECT	DRAWING NO	R-H59A-03	REV	A0	TITLE	5921S 8P8C 1X8-F4.57	

A

A