
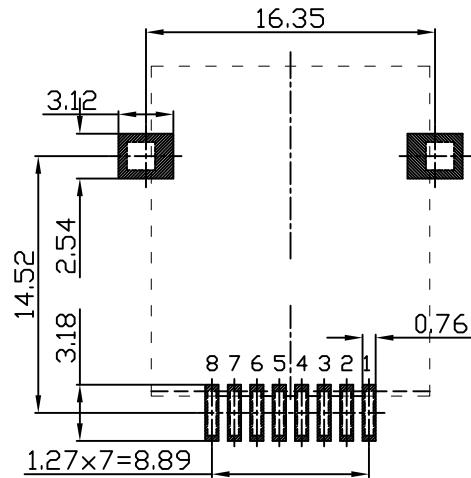
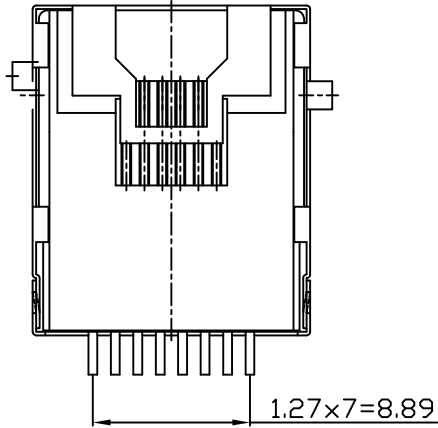
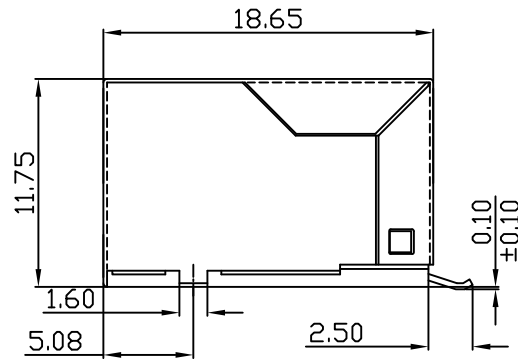


RoHS compliant

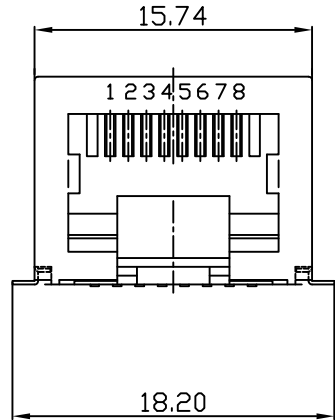

NOTES

MATERIAL

1. HOUSING MATERIAL : HIGH TEMP THERMOPLASTIC
FLAMMABILITY RATING UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE T=0.3mm.
3. PLATING : GOLD LATING OVER NICKEL IN CONTACT
TIN PLATING OVER NICKEL IN SOLDER AREA.
: FU", 3U", 6U", 15U", 30U", 50U".

ELECTRICAL

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500V DC .
5. DIELECTRIC DIELECTRIC RESISTANCE : 1000V AC RMS 50Hz. 1MIN.

MECHANICAL

1. DURRABILITY : 750 CYCLES MIN.
2. PCB RETENTIONPRE-SOLDER : 1 LB MIN.

ENVIRONMENTAL:

1. STORAGE : -40°C~+85°C.
2. OPERATION : -40°C~+85°C.

P/N:RJ56S-8811-120551X

56S RJ45 90° SMT SERIES PCB JACK

POSITIONS (金針位置):

8-POSITIONS (8P)

CONTACTS (金針根數):

8-CONTACTS (8C)

PORTS (窗口):

1)-1X1

SHIELD (屏蔽壳):

1-W/SHIELD (有屏蔽壳)

IRON PEG (铁脚定位脚)

2-PEG Outward (定位脚向外)

HOUSING PEG (塑胶定位柱):

1-Mushroom Feet (香菇脚)

PACKING TYPE (包装):

1-REEL (卷带包装)

2-PVC TRAY (盘装)

COLOR (颜色):

1-BLACK (黑色)

7-BLUE (蓝色)

PLASTIC (塑料):

4-LCP: 5-719T

GOLD PLATING (镀金厚度):

1-10"; 5-60"; 6-150"

7-300"; 8-500";

PCB LAYOUT

					GENERAL TOLERANCE			DRAWN		Gene Li		2019/07/18		X-SHUN 东莞市祥舜电子科技有限公司 DONGGUAN X-SHUN ELECTRONIC TECHNOLOGY CO., LTD									
					.X	±0.35	X.°	± 2°	CHECKE		JH			PART NO.		RJ56S-8811-120551X							
A0		NEW DESIGN			2019/07/18	.XX	±0.25	.X°	± 1°	APPROVE				TITLE:		RJ45 8P8C 90° SMT W/SHIELD PCB JACK							
REV	ECN NO	DESCRIPTION			DATE	SIGNATURE			PROJECT		UNIT	mm	SCALE	1:1	SHEET	1/1	REV	A0	DRAWING NO.		RJ56S-88		
																							