
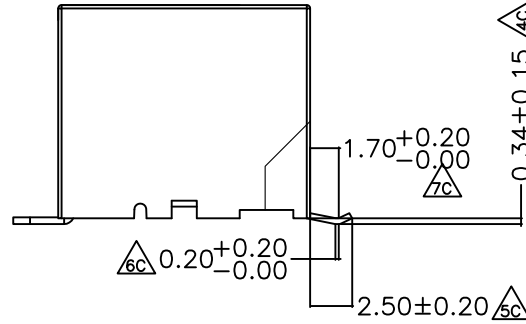


RoHS compliant

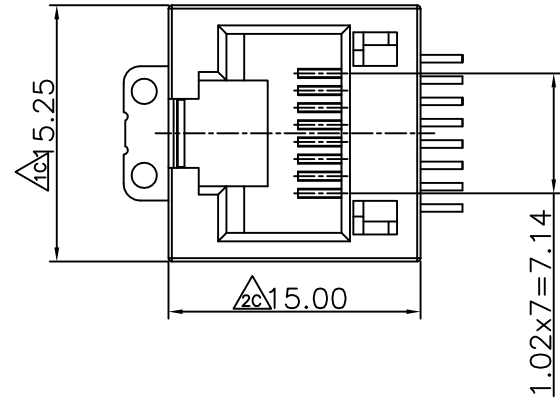

NOTES

MATERIAL

1. HOUSING MATERIAL : HIGH TEMP THERMOPLASTIC
FLAMMABILITY RATING UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE T=0.3mm.
3. PLATING : GOLD LATING OVER NICKEL IN CONTACT
TIN PLATING OVER NICKEL IN SOLDER AREA.
: FU", 3U", 6U", 15U", 30", 50".

ELECTRICAL



1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500V DC .
5. DIELECTRIC DIELECTRIC RESISTANCE : 1000V AC RMS 50Hz. 1MIN.

MECHANICAL

1. DURRABILITY : 750 CYCLES MIN.
2. PCB RETENTIONPRE-SOLDER : 1 LB MIN.

ENVIRONMENTAL:

1. STORAGE : -40°C~+85°C.
2. OPERATION : -40°C TO 85°C.
3. IR Reflow Soldering Temperature:255° C To **265°C(5~10 Seconds).**
Mates With Modular Plug Conforming To FCC Part 68, Subpart F.

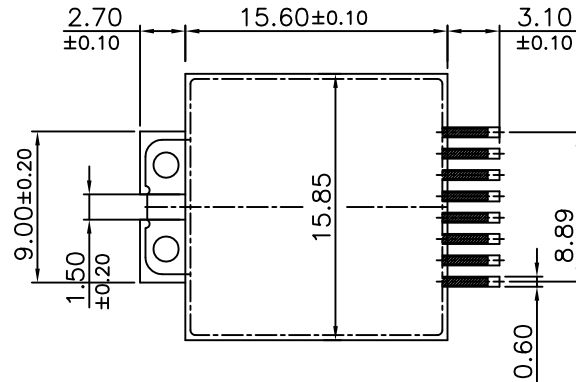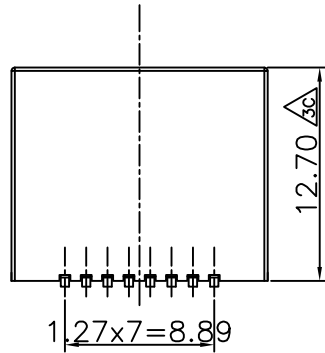

PCB LAYOUT/TOP VIEW

P/N:RJ52S-8811-045051X

RJ45 180° SMT SERIES PCB JACK

POSITIONS (金針位置):

8-POSITIONS (8P)

CONTACTS (金針根數):

8-8CONTACTS (8C)

PORTS (窗口):

1-1X1

SHIELD (屏蔽壳):

0-Without SHIELD (无屏蔽壳)

PEG/TAB (边定位脚):

4-Without Housing PEG (无定位柱)

GOLD PLATING (鍍金厚度):

1-1U", 3-3U", 5-6U",

6-15U", 7-30U", 8-50U",

PACKING TYPE (包装):

1-REEL (卷带包装)

2-PVC TRAY (盘装)

COLOR (颜色):

1-BLACK (黑色)

PLASTIC (塑料):

4-LCP; 5-PA9T

LED STYLE (LED 颜色类型):

0-Without LED (无LED)

GENERAL TOLERANCE

.X ±0.35 X.° ±2°

.XX ±0.25 .X.° ±1°

.XXX ±0.15 .XX.° ±0.5°

PROJECT



DRAWN

Gene Li

2017/07/13

CHECKE

JH

APPROVE

UNIT mm

SCALE 1:1

SHEET 1/1

X-SHUN

东莞市祥舜电子科技有限公司

DONGGUAN X-SHUN ELECTRONIC TECHNOLOGY CO., LTD

PART NO. RJ52S-8811-045051X

TITLE: RJ45 8P8C 180° SMT H=12.7MM PCB JACK

REV

A0

DRAWING NO.

RJ52S-88

REV

ECN NO

DESCRIPTION

DATE

SIGNATURE

A0

NEW DESIGN

2017/07/13

A

A