



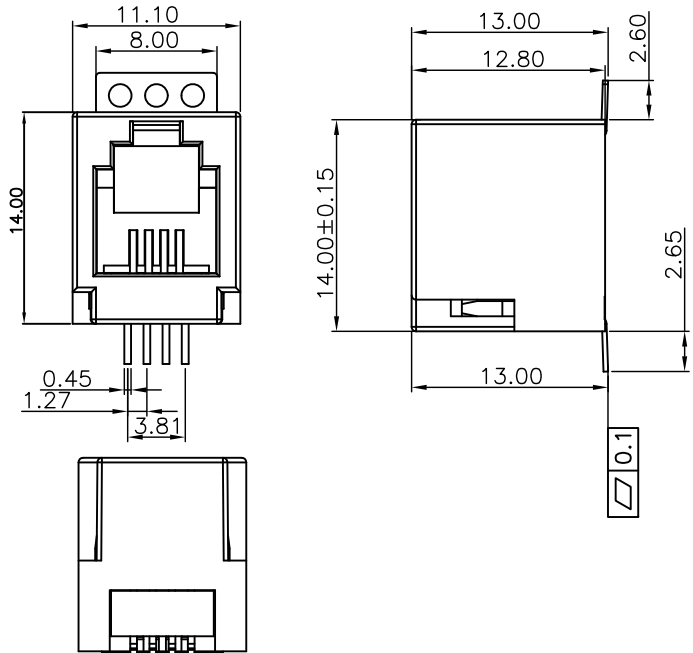


RoHS compliant

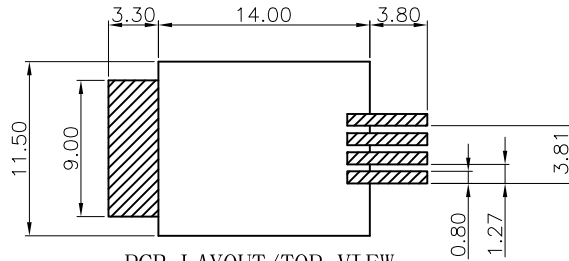

贴MYLAR图示
卷装时需要

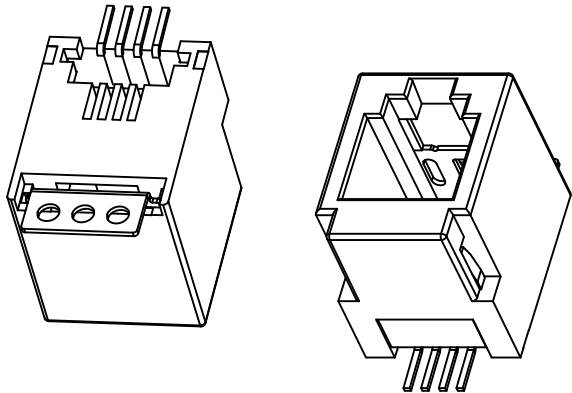

PCB LAYOUT/TOP VIEW
TOLERANCE=± 0.05

NOTES

MATERIAL
1. HOUSING MATERIAL : THERMO PLASTICS UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE T=0.3mm.
3. PLATING : GOLD PLATING ON CONTACT AREA ,
TIN PLATING ON SOLDER AREA,
NICKEL PLATED OVER ALL.
4. GROUNDING FOOT : BRASS T=0.35 TIN PLATING OVER NICKEL.

ELECTRICAL
1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 40 MILLIOHMS MAX.
4. INSULATION RESISTANCE : 500 MEGOHMS MIN @ 100V DC .
5. DIELECTRIC DIELECTRIC RESISTANCE : 500V DC RMS 50Hz. 1MIN.

MECHANICAL
1. DURRABILITY : 750 CYCLES MIN.
2. MATING/UNMATING FORC: 2.24 KG.F MAX.

ENVIRONMENTAL:
1. OPERATION : -40℃~+85℃.
2. STORAGE : -40℃~+85℃.

P/N:RJ52S-4411-073041X

RJ11 180° SMT SERIES PCB JACK
POSITIONS (金针位置):
4-POSITIONS (4P)
CONTACTS (金针根数):
4-CONTACTS (4C)
PORTS (端口):
11-1X1
SHIELD (屏蔽壳):
0-Without SHIELD (无屏蔽壳)
PEG (TAB (边定位脚)):
7-W/PEG (无脚三孔)
GOLD PLATING (镀金厚度):
1-10" : 3-20" : 3-30"
0-15L ; 7-30L ; 9-50L ;
PACKING TYPE (包装):
1-BELL (卷带包装)
2-PVC TRAY (盘装)
COLOR (颜色):
1-BLACK (黑色)
2-PLASTIC (塑料)
4-LCP; 5-PA9T
LED STYLE (LED 颜色类型):
0-Without LED (无LED)

GENERAL TOLERANCE

DRAWN

Gene Li

2021/07/22

X-SHUN 东莞市祥舜电子科技有限公司
DONGGUAN X-SHUN ELECTRONIC TECHNOLOGY CO., LTD

.X ±0.35 .X° ±2°

CHECKE

GM

PART NO. RJ52S-4411-073041X

.XX ±0.25 .X° ±1°

APPROVE

TITLE: RJ11 4P4C 180° SMT W=11.1

.XXX ±0.15 .XX° ±0.5°

PROJECT

UNIT mm

SCALE 1:1

SHEET

REV

A0

DRAWING NO.

RJ52S-G04

REV

ECN NO

DESCRIPTION

DATE

SIGNATURE

1

2

3

4

5

6

7

8

A0

A

A