

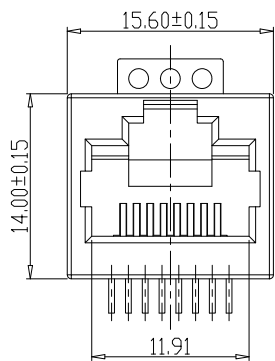
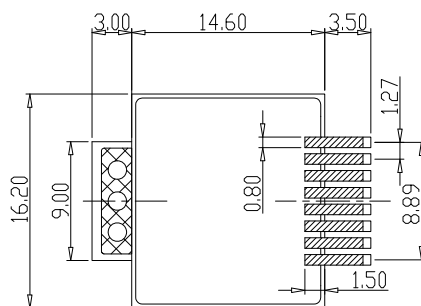




RoHS compliant

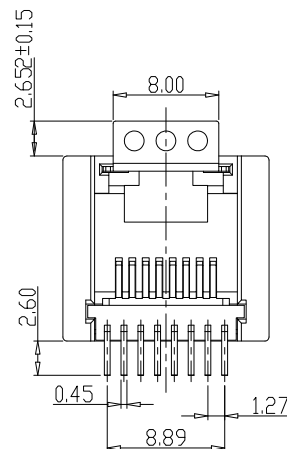

共面度0.10mm 以内



PCB LAYOUT/TOP
VIEW
TOLERANCE=±0.05



ELECTRICAL:

CURRENT RATING:1.5AMPS

VOLTAGE RATING:125V AC

INSULATION RESISTANCE:500M MINI

WITHSTAND VOLTAGE:AC 1000V RMS 50Hz OR 60Hz 1MIN

CONTACT RESISTANCE:20m MAX

MECHANICAL:

MATING FORCE: 2.2KG.F MAX

RETENTION STRENGTH:7.7KG.F BETWEEN JACK AND PLUG

DURABILTY:750MATING CYCLES MINI

MATERIAL:

HOUSING: LCP, UL94V-0,

CONTACT WIRE:0.30mm DIAMETER PHOSPHOR BRONZE (C5191)

OPTIONAL GOLD PLATING

METAL GASKET :0.35mm THICKNESS,NICKEL PLATED COPPER
ALLO(C2680)

P/N:RJ52S-8811-073041X

RJ45 180° SMT SERIES PCB JACK
POSITIONS (金针位置):
8-POSITIONS (8P)
CONTACTS (金针根数)
8-CONTACTS (8C)
PORTS (端口)
1[1-1X]
SHIELD (屏蔽壳)
0-Without SHIELD (无屏蔽壳)
PEG/TAB (边定位脚):
7-W/PEG (无三孔)
GOLD PLATING (镀金厚度):
1-1E, 15-20; 5-80;
0-15L, 17-30L; 35-500L;

PACKING TYPE (包装):
1-ROLL (卷带包装)
2-PVC TRAY (盘装)
COLOR (颜色):
1-BLACK (黑色)
PLASTIC (塑料):
4-LCP; 5-PA6T
LED STYLE (LED 颜色类型):
0-Without LED (无LED)

GENERAL TOLERANCE

DRAWN

Gene Li

2021/07/22

X-SHUN 东莞市祥舜电子科技有限公司
DONGGUAN X-SHUN ELECTRONIC TECHNOLOGY CO., LTD

.X ±0.35 .X° ± 2°

CHECKE

PK

PART NO. RJ52S-8811-073041X

.XX ±0.25 .X° ± 1°

APPROVE

TITLE: RJ45 8P8C 180° SMT W=15.6

.XXX ±0.15 .XX° ± 0.5°

PROJECT

UNIT mm SCALE 1:1 SHEET 1/1

REV A0 DRAWING NO. RJ52S-P08

REV

ECN NO

DESCRIPTION

DATE

SIGNATURE



UNIT mm SCALE 1:1 SHEET 1/1

REV A0 DRAWING NO. RJ52S-P08