
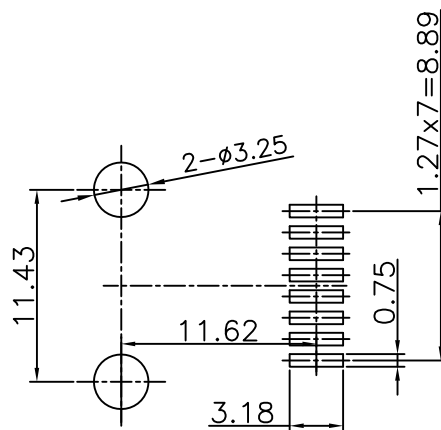
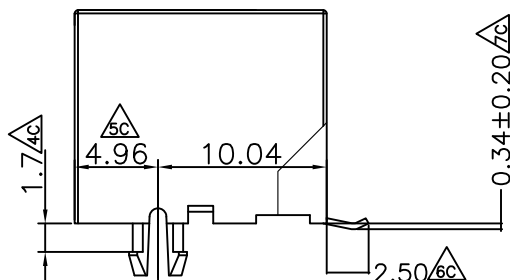
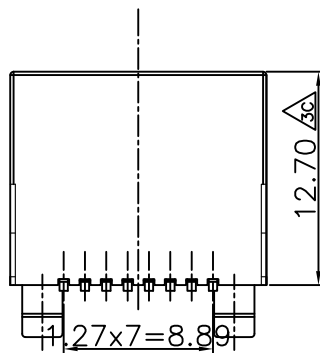


RoHS compliant

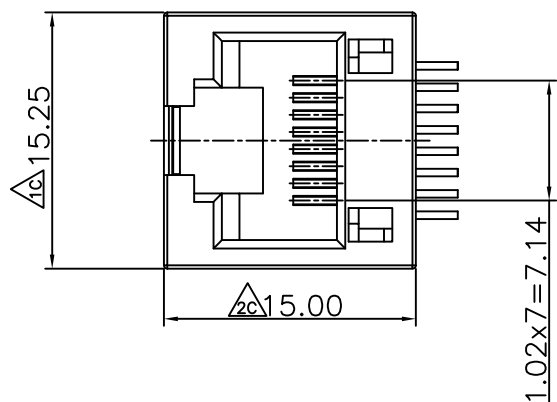

PCB LAYOUT/TOP VIEW

NOTES

MATERIAL

- HOUSING MATERIAL : HIGH TEMP THERMOPLASTIC
FLAMMABILITY RATING UL94V-0.
- CONTACT MATERIAL : PHOSPHOR BRONZE T=0.3mm.
- PLATING : GOLD LATING OVER NICKEL IN CONTACT
TIN PLATING OVER NICKEL IN SOLDER AREA.
: 1U", 3U", 6U", 15U", 30", 50".

ELECTRICAL

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500V DC .
- DIELECTRIC DIELECTRIC RESISTANCE : 1000V AC RMS 50Hz. 1MIN.

MECHANICAL

- DURRABILITY : 750 CYCLES MIN.
- PCB RETENTIONPRE-SOLDER : 1 LB MIN.

ENVIRONMENTAL:

- STORAGE : -40℃ ~ +85℃.
- OPERATION : -40℃ TO 85℃.

P/N:RJ52S-8811-055051X

RJ45 180° SMT SERIES PCB JACK

POSITIONS (金针位置):

8-POSITIONS (8P)

CONTACTS (金针根数)

8-CONTACTS (8C)

PORTS (窗口):

1-1X1

SHIELD (屏蔽壳):

0-Without SHIELD (无屏蔽壳)

PEG/TAB (边定位脚):

5-W/Housing PEG (有引脚无接地片)

GOLD PLATING (镀金厚度):

1-1U"; 3-3U"; 5-6U";

6-15U"; 7-30U"; 8-50U";

PACKING TYPE (包装):

1-REEL (卷带包装)

2-PVC TRAY (盘装)

COLOR (颜色):

1-BLACK (黑色)

PLASTIC (塑料):

4-LCP; 5-PA9T

LED STYLE (LED 颜色类型):

0-Without LED (无LED)

PCB LAYOUT/TOP VIEW

					GENERAL TOLERANCE	DRAWN	Gene Li		2017/07/13		X-SHUN 东莞市祥舜电子科技有限公司 DONGGUAN X-SHUN ELECTRONIC TECHNOLOGY CO., LTD					
					.X ±0.35 X.° ± 2°	CHECKE	JH				PART NO.	RJ52S-8811-055051X				
A0		NEW DESIGN	2017/07/13		.XX ±0.25 .X° ± 1°	APPROVE					TITLE:	RJ45 8P8C 180° SMT H=12.7MM PCB JACK				
					.XXX ±0.15 .XX° ± 0.5°											
REV	ECN NO	DESCRIPTION	DATE	SIGNATURE	PROJECT	UNIT	mm	SCALE	1:1	SHEET	1/1	REV	A0	DRAWING NO.	RJ52S-88	
																