
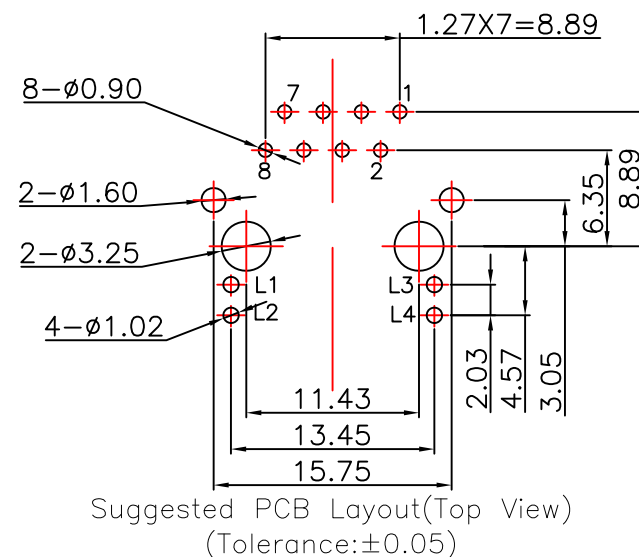

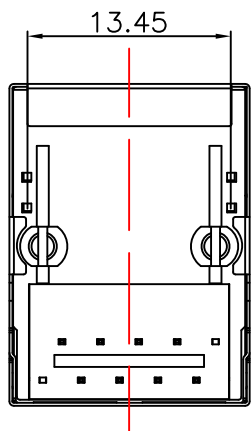
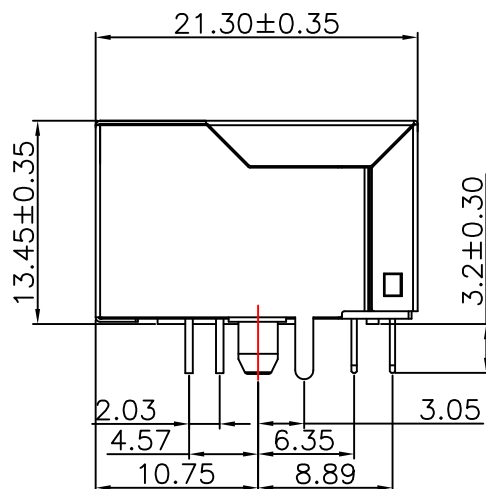


RoHS compliant

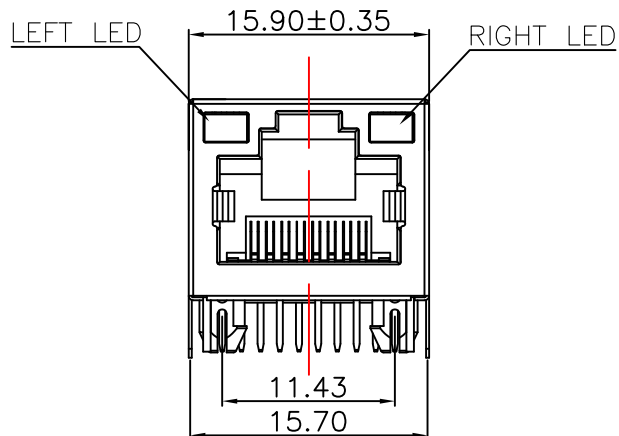

1.Material:

- 1.1 Housing: PBT UL94V-0 Black.
Insert: PBT UL94V-0 Black.
- 1.2 Shell: 30u" Ni Over Brass(C2680),T=0.20mm.
- 1.3 RJ45 Terminal:Phosphor Bronze(C5191) T=0.35mm
Plating:6u" Gold Plated On Contact Area,
80u" ~120u" Tin Plated On Solder Area,
50u" ~80u" Ni Underplated Overall.
- 1.4 Tail Terminal: Brass(C2680) T=0.35mm,
Plating: 80u" ~120u" Tin Plated Over,
30u" ~50u" Ni Underplated Overall.

2.Environmental requirements:


- 2.1 Lead-free process,compliant RoHS.

					GENERAL TOLERANCE			DRAWN		Gene Li		2019/12/08		X-SHUN 东莞市祥舜电子科技有限公司 DONGGUAN X-SHUN ELECTRONIC TECHNOLOGY CO., LTD						
					.X	±0.35	X.°	± 2°	CHECKE	HYI				PART NO.		203111-111A-B301				
					.XX	±0.25	.X°	± 1°						TITLE:		RJ45 TAB-UP 100BASE-TX 1X1 W/LED W/SHIELD				
A0		NEW DESIGN		2019/12/08		.XXX	±0.15	.XX°	± 0.5°	APPROVE										
REV	ECN NO	DESCRIPTION		DATE	SIGNATURE	PROJECT					UNIT	mm	SCALE	1:1	SHEET	1/3	REV	A0	DRAWING NO.	203-B301

RoHS compliant

PCB CONNECTIONS

RJ45 CONNECTIONS

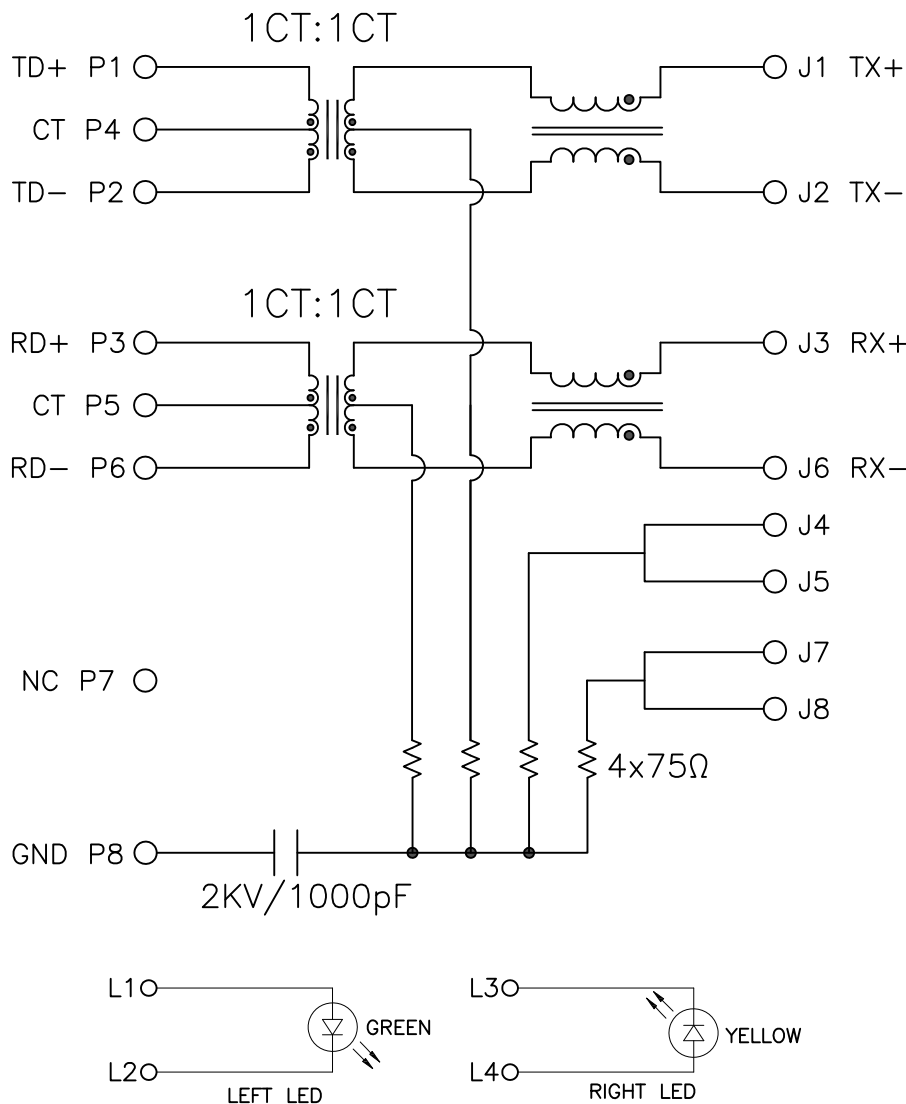

3. Electrical Specification @25°C:

3.1 Inductance: 350uH Min With 8mA DC bias.

3.2 Insertion loss :
1-100MHZ -1dB max.

3.3 Return loss :
1-30MHZ -18dB min.
30-60MHZ -16dB min.
60-80MHZ -12dB min.

3.4 Common Mode Rejection: 1-100MHZ -30dB min.

3.5 Cross Talk: 1-100MHZ -30dB min.

4. Operating and Storage Temperature:

4.1 Operating Temperature : -40°C to +85°C.


4.2 Storage Temperature : -40°C to +85°C.

5. Wave soldering peak temperature: 260°C.


Emitting Color	λ_p (nm)	$V_f @ I_f = 20\text{mA}$
Green	565	1.8-2.5V
YELLOW	585	1.8-2.5V

					GENERAL TOLERANCE			DRAWN		Gene Li		2019/12/08		X-SHUN 东莞市祥舜电子科技有限公司 DONGGUAN X-SHUN ELECTRONIC TECHNOLOGY CO., LTD						
					.X	±0.35	X.°	± 2°	CHECKE		HYI			PART NO.		203111-111A-B301				
A0		NEW DESIGN		2019/12/08	.XX	±0.25	.X°	± 1°	APPROVE					TITLE:		RJ45 TAB-UP 100BASE-TX 1X1 W/LED W/SHIELD				
				.XXX	±0.15	.XX°	± 0.5°													
REV	ECN NO	DESCRIPTION		DATE	SIGNATURE	PROJECT			UNIT		mm	SCALE	1:1	SHEET	2/3	REV	A0	DRAWING NO.	203-B301	



RoHS compliant

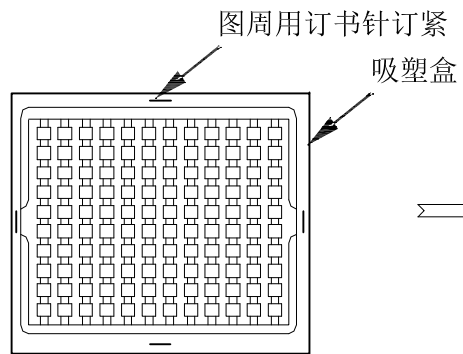

每吸塑盒放120PCS产品

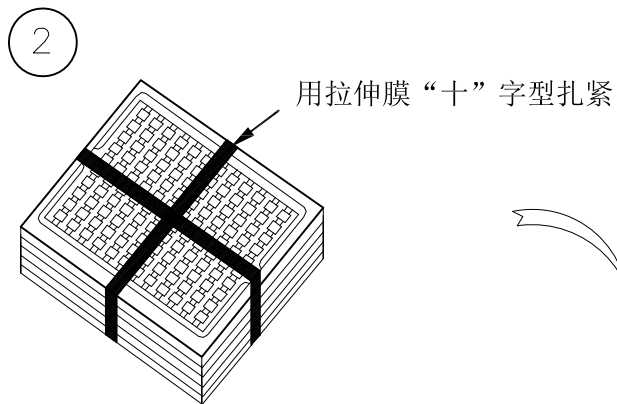

5吸塑盒为一叠

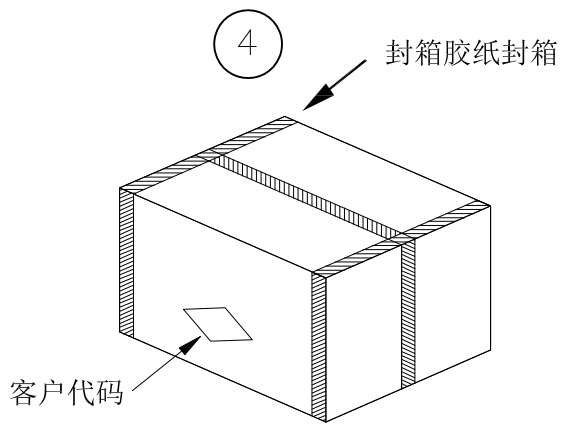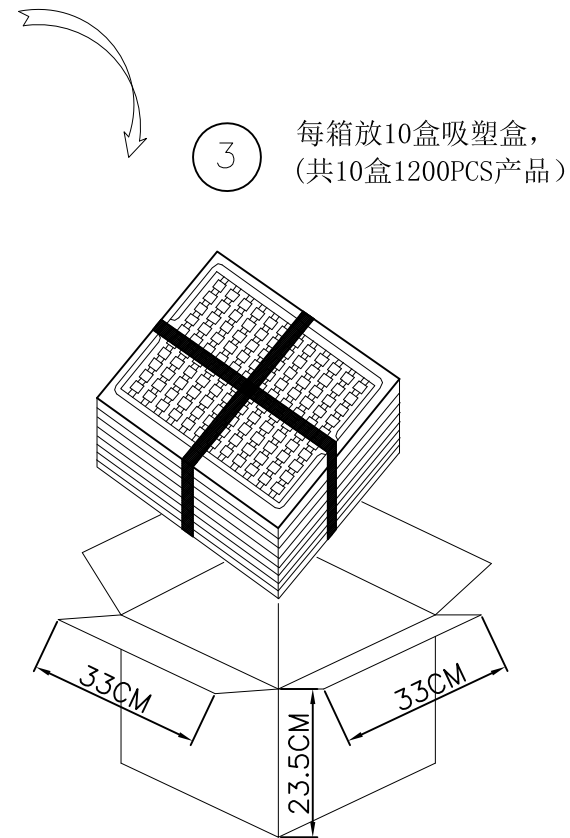

					GENERAL TOLERANCE		DRAWN		Gene Li		2019/12/08		X-SHUN 东莞市祥舜电子科技有限公司 DONGGUAN X-SHUN ELECTRONIC TECHNOLOGY CO., LTD																
					.X	±0.35	X.°	± 2°	CHECKE		HYI			PART NO.		203111-111A-B301													
A0		NEW DESIGN		2019/12/08		.XX	±0.25	.X°	± 1°	APPROVE				TITLE:		RJ45 TAB-UP 100BASE-TX 1X1 W/LED W/SHIELD													
						.XXX	±0.15	.XX°	± 0.5°																				
REV	ECN NO	DESCRIPTION		DATE	SIGNATURE	PROJECT		 		UNIT	mm	SCALE	1:1	SHEET	3/3	REV	A0	DRAWING NO.		203-B301									