

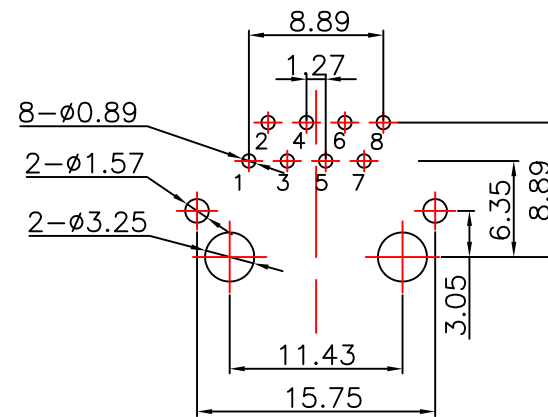
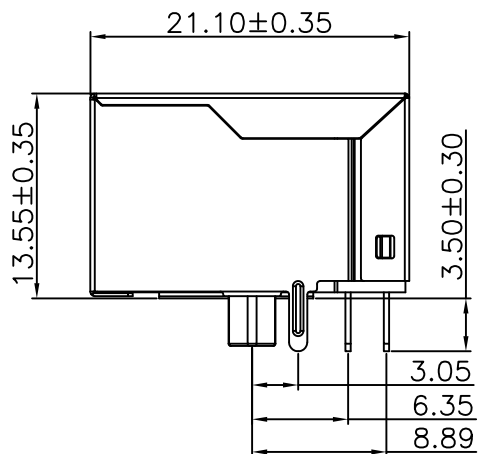
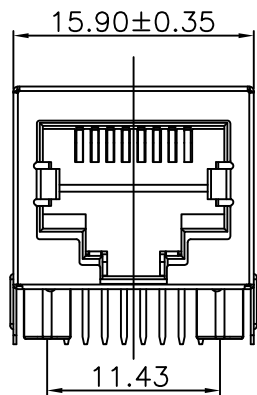


RoHS compliant

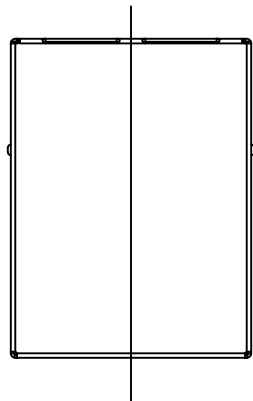

Suggested PCB Layout(Top View)
(Tolerance:±0.05)

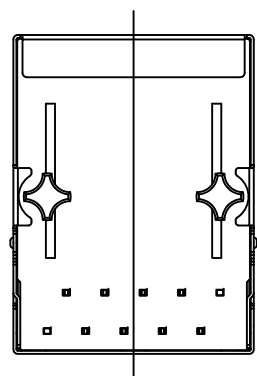

1.Material:


- 1.1 Housing: PBT UL94V-0 Black.
Insert: PBT UL94V-0 Black.
- 1.2 Shell: 30u" Ni Over Brass(C2680),T=0.20mm.
- 1.3 RJ45 Terminal:Phosphor Bronze(C5191) T=0.35mm
Plating:6u" Gold Plated On Contact Area,
80u" ~120u" Tin Plated On Solder Area,
50u" ~80u" Ni Underplated Overall.
- 1.4 Tail Terminal: Brass(C2680) T=0.35mm,
Plating: 80u" ~120u" Tin Plated Over,
30u" ~50u" Ni Underplated Overall.

2.Environmental requirements:

- 2.1 Lead-free process,compliant RoHS.

						GENERAL TOLERANCE		DRAWN		Gene Li		2018/03/08		X-SHUN 东莞市祥舜电子科技有限公司		DONGGUAN X-SHUN ELECTRONIC TECHNOLOGY CO., LTD	
						.X	±0.35	X.°	± 2°	CHECKE		HY		PART NO.		201111-1110-B118	
						.XX	±0.25	.X°	± 1°	APPROVE				TITLE:		RJ45 TAB-DOWN 100BASE-TX 1X1 W/SHIELD	
						.XXX	±0.15	.XX°	± 0.5°	PROJECT				REV		A0	
REV	ECN NO	DESCRIPTION		DATE	SIGNATURE					UNIT	mm	SCALE	1:1	SHEET	1/3	DRAWING NO.	
		NEW DESIGN		2018/03/08												201-B118	


RoHS compliant

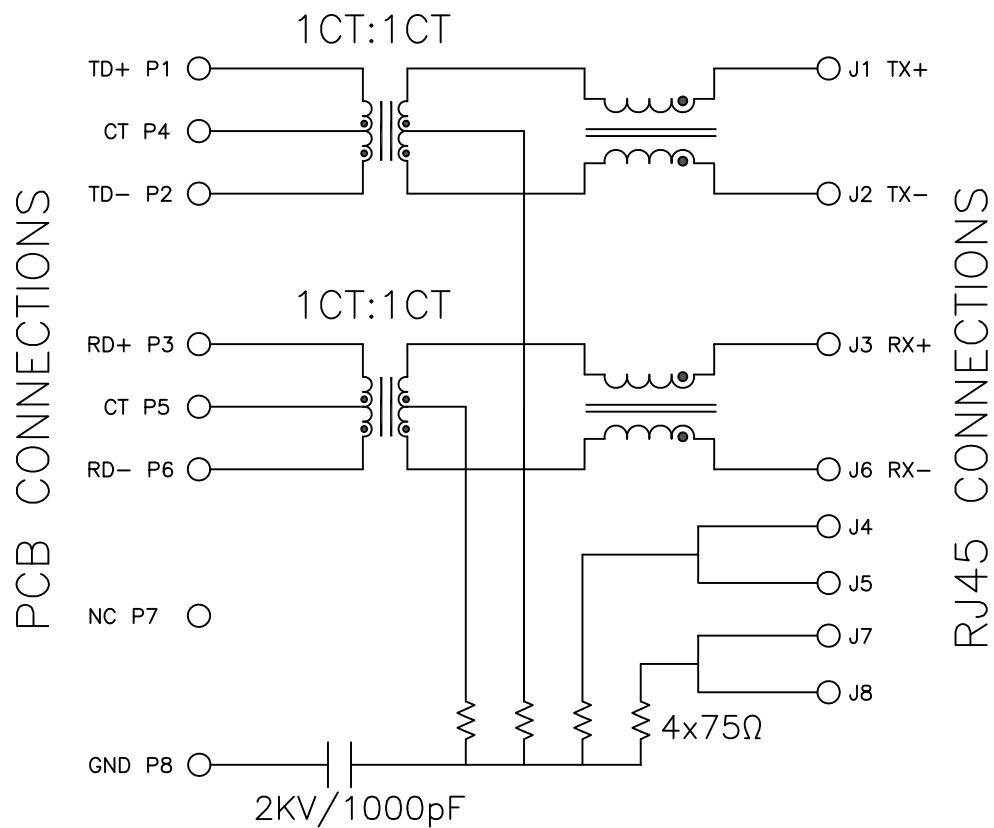


3. Electrical Specification @25°C:
- 3.1 Inductance: 350uH Min With 8mA DC bias.
- 3.2 Insertion loss :
- 1-100MHZ -1dB max.
- 3.3 Return loss :
- 1-30MHZ -18dB min.
- 30-60MHZ -16dB min.
- 60-80MHZ -12dB min.
- 3.4 Common Mode Rejection: 1-100MHZ -30dB min.
- 3.5 Cross Talk: 1-100MHZ -30dB min.
4. Operating and Storage Temperature:
- 4.1 Operating Temperature : -40°C to +85°C.
- 4.2 Storage Temperature : -40°C to +85°C.

					GENERAL TOLERANCE		DRAWN		Gene Li		2018/03/08		X-SHUN 东莞市祥舜电子科技有限公司 DONGGUAN X-SHUN ELECTRONIC TECHNOLOGY CO., LTD				
					.X	±0.35	X.°	± 2°	CHECKE				PART NO.		201111-1110-B118		
A0		NEW DESIGN	2018/03/08		.XX	±0.25	X.°	± 1°	APPROVE				TITLE:		RJ45 TAB-DOWN 100BASE-TX 1X1 W/SHIELD		
				.XXX	±0.15	.XX°	± 0.5°	PROJECT									
REV	ECN NO	DESCRIPTION	DATE	SIGNATURE			UNIT	mm	SCALE	1:1	SHEET	2/3	REV	A0	DRAWING NO.	201-B118	

RoHS compliant


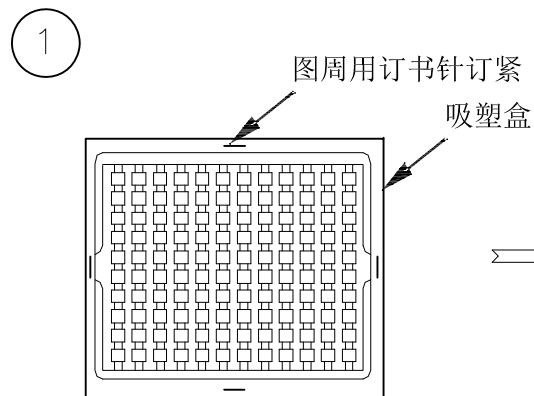


每吸塑盒放120PCS产品

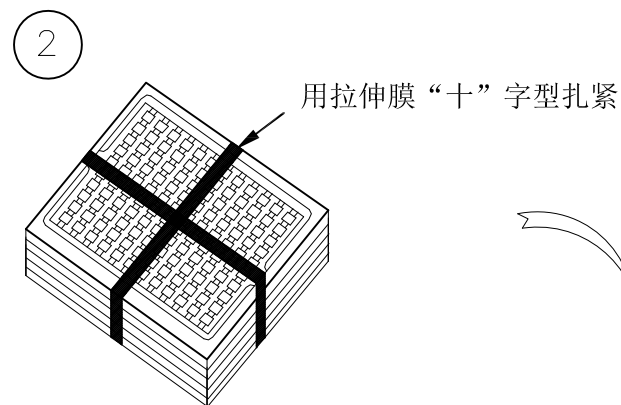

5吸塑盒为一叠

③ 每箱放10盒吸塑盒，
(共10盒1200PCS产品)

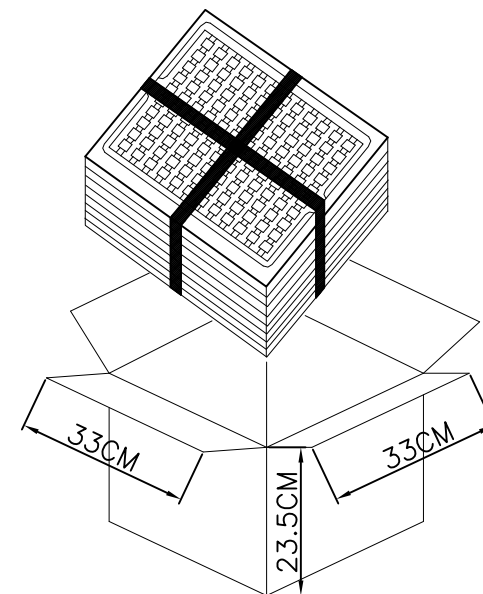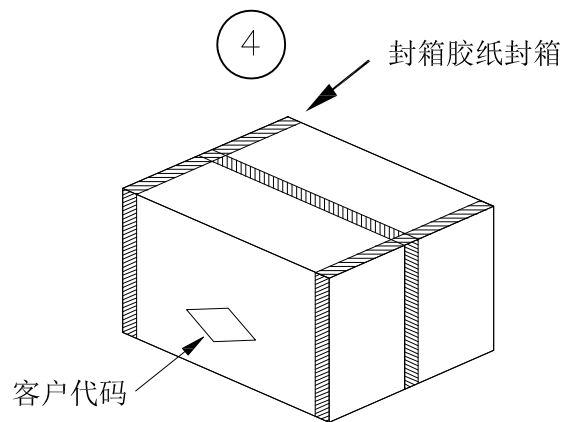

					GENERAL TOLERANCE	DRAWN	Gene Li		2018/03/08		X-SHUN 东莞市祥舜电子科技有限公司 DONGGUAN X-SHUN ELECTRONIC TECHNOLOGY CO., LTD.					
					.X ±0.35 X.° ± 2°	CHECKE	HY				PART NO.	201111-1110-B118				
A0		NEW DESIGN	2018/03/08		.XX ±0.25 .X° ± 1°						TITLE:	RJ45 TAB-DOWN 100BASE-TX 1X1 W/SHIELD				
					.XXX ±0.15 .XX° ± 0.5°	APPROVE										
REV	ECN NO	DESCRIPTION	DATE	SIGNATURE	PROJECT	UNIT	mm	SCALE	1:1	SHEET	3/3	REV	A0	DRAWING NO.	201-B118	