

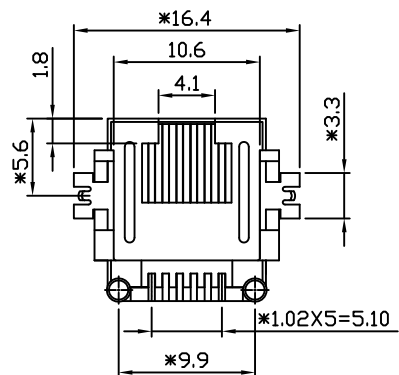


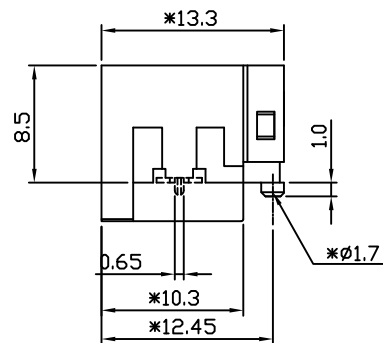


RoHS compliant



DETAIL 3:1

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 500 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH: 1000 VAC RMS 60Hz, 1MIN.


MECHANICAL:

1. HOUSING MATERIAL : NYLON FR52(HIGH TEMPERATURE)UL94V-0
2. CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm.
3. PLATING : 1: CONTACT AREA- SELECTIVE GOLD PLATING.
2: TAILS- 150u" TIN-LEAD MIN OVER 50u" NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.
5. PCB RETENTION PRE-SOLDER: 1 LB MIN.
6. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

1. STORAGE : -40°C TO +85°C.
2. OPERATION: -40°C TO +85°C.

MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.

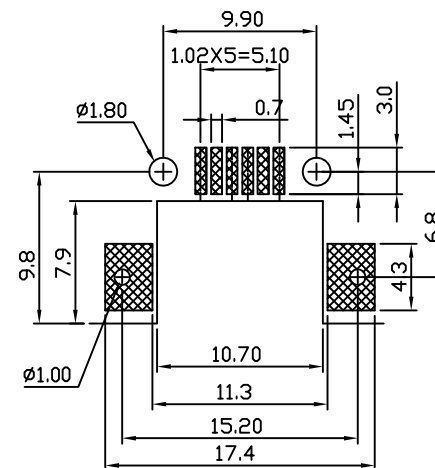

P.C.B. Layout (TOP VIEW)t=1

					GENERAL TOLERANCE			DRAWN		Gene Li		2017/12/08		X-SHUN 东莞市祥舜电子科技有限公司 DONGGUAN X-SHUN ELECTRONIC TECHNOLOGY CO., LTD					
					.X	±0.35	X.°	± 2°	CHECKE		JL								
A0		NEW DESIGN		2017/12/08		.XX	±0.25	X.°	± 1°	APPROVE				PART NO.		RJ58S-6611-201411P			
						.XXX	±0.15	.XX°	± 0.5°					TITLE:		RJ12 6P6C SINK H=8.6 W/SHIELD PCB JACK			
REV	ECN NO	DESCRIPTION		DATE	SIGNATURE	PROJECT			UNIT		mm	SCALE	1:1	SHEET	1/1	REV	A0	DRAWING NO.	RJ58S-66
																			