




RoHS compliant



LED Specification

Standard LED Color	LED Wavelength	Foward	Foward
Green	565nm	20mA	1.8-2.4V
Yellow	585nm	20mA	1.8-2.4V

NOTES:

1. HOUSING MATERIAL: GLASS FILLED POLYESTER UL94V-0.
2. CONTACT MATERIAL: PHOSPHOR BRONZE.
3. PLATING: GOLD PLATED ON CONTACT AREA, 100u" MIN. TIN PLATED ON SOLDERING AREA, WITH 40u" NICKEL PLATED.
4. LED: T=0.50, TIN PLATED.

ELECTRICAL:

1. VOLTAGE RATING: 125V AC RMS.
2. CURRENT RATING: 1.5AMP.
3. CONTACT RESISTANCE: 30MILLIOHMS MAX.
4. INSULATION RESISTANCE: 500MEGOHMS MIN @500V DC.

MECHANICAL:




1. DURABILITY: 750 CYCLES MIN.
2. INSERTION FORCE: 22N MAX.
3. REMOVAL FORCE (WITHOUT PLUG LOCK): 22N MAX.

ENVIRONMENTAL:



1. STORAGE: -40°C~85°C
2. OPERATION: -40°C~85°C
3. REFLOW SOLDERING Temperature: 255±5°C.

*Apply to the EU standards (ROSH)

1. ①~⑪ FOR QIP DIM.

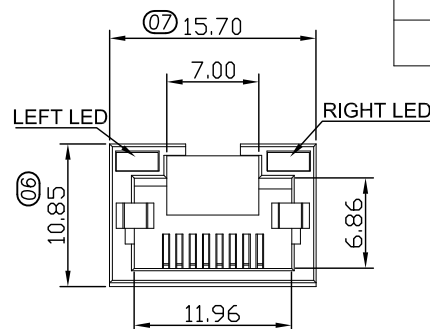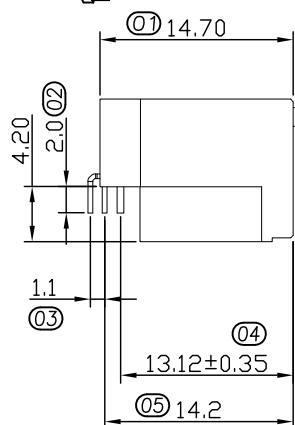

脚位尺寸以过孔规为准

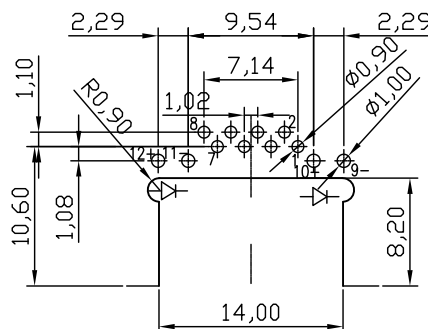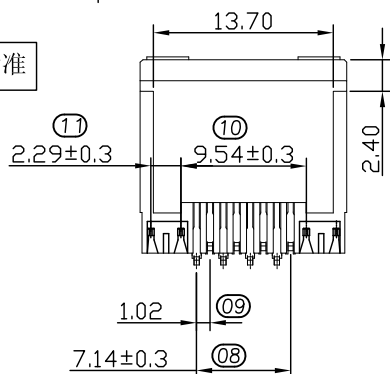

PCB LAYOUT TOP VIEW
TOL: ±0.05

P/N: RJ58D-8811-011413P

RJ45 SINK DIP SERIES PCB JACK

POSITIONS (金針位置):

8-POSITIONS (8P)

CONTACTS (金針根數):

8-CONTACTS (8C)

PORTS (窗口):

11-1X1

SHIELD (屏蔽壳):

0=NO SHIELD (无屏蔽壳)

LED STYLE (LED 顏色類型):

1-L LED: YELLOW, R LED: GREEN (左黃右綠)

2-L LED: GREEN, R LED: YELLOW (左綠右黃)

PACKING TYPE (包裝):

R-REEL (卷帶包裝)

P-PVC TRAY (盤裝)

HEIGHT (高度):

3-SINK H=4.2 (沉板 4.2)

COLOR (顏色):

1-BLACK (黑色)

PLASTIC (塑料):

4-LCP

GOLD PLATING (鍍金厚度):

1-10" : 2-1.50" : 3-30" : 4-60" :

5-150" : 6-300" : 7-500" :

8	—
7	—
6	RX-
5	—
4	—
3	RX+
2	TX-
1	TX+
PIN序 说明	

					GENERAL TOLERANCE		DRAWN		2018/10/22		X-SHUN 东莞市祥舜电子科技有限公司			
					.X	±0.35	X.°	±2°	CHECKED		DONGGUAN X-SHUN ELECTRONIC TECHNOLOGY CO., LTD			
					.XX	±0.25	X.°	±1°	APPROVE		PART NO. RJ58D-8811-011413P			
					.XXX	±0.15	.XX°	±0.5°			TITLE: RJ45 8P8C DIP SINK H=4.2 W/LED			
REV	ECN NO	DESCRIPTION	DATE	SIGNATURE	PROJECT		UNIT	mm	SCALE	1:1	SHEET	1/1	REV	A0
							DRAWING NO.		RJ58D-88					