




RoHS compliant



NOTES:

1. HOUSING MATERIAL: GLASS FILLED POLYESTER UL94V-0.
2. CONTACT MATERIAL: COPPER ALLOY, T=0.35.
3. PLATING: GOLD PLATED ON CONTACT AREA, 100u"MIN. MATTE TIN PLATED ON SOLDERING AREA, 50u"MIN. NICKEL PLATED OVERALL.
4. SHELL: COPPER ALLOY, T=0.20.
5. LED: T=0.50, MATE TIN PLATED.

ELECTRICAL:

1. VOLTAGE RATING: 125V AC RMS.
2. CURRENT RATING: 1.5AMP.
3. CONTACT RESISTANCE: 40MILLIOHMS MAX.
4. INSULATION RESISTANCE: 500MEGOHMS MIN @100V DC.

MECHANICAL:




1. DURABILITY: 750 CYCLES MIN.
2. INSERTION FORCE: 22N MAX.
3. REMOVAL FORCE (WITHOUT PLUG LOCK): 22N MAX.

ENVIRONMENTAL:



1. STORAGE: -40°C~85°C
2. OPERATION: -40°C~85°C

*Apply to the EU standards (ROSH)

1. ① ⑭ 为 QIP 尺寸.

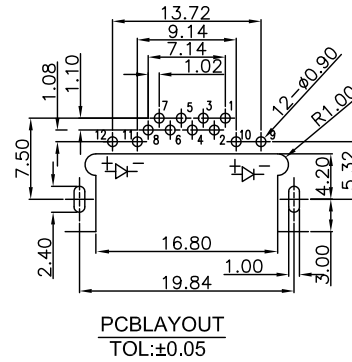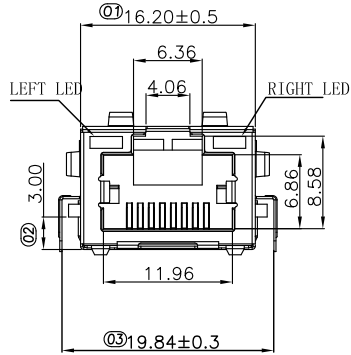

PCBLAYOUT
TOL: ±0.05

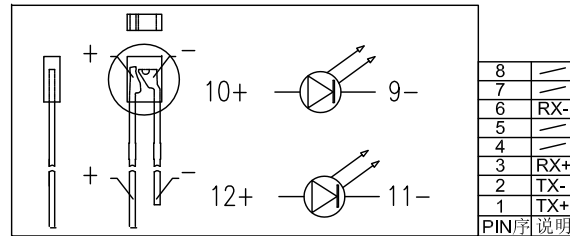

P/N: RJ58D-8811-211415P

RJ45 SINK DIP SERIES PCB JACK

POSITIONS (金針位置):

8-POSITIONS (8P)

CONTACTS (金針根數)

8-CONTACTS (8C)

PORTS (端口):

11-111

SHIELD (屏蔽壳)

2-WITH SHIELD (有屏蔽壳/EMI彈片)

LED STYLE (LED 顏色類型)

1-L LED: YELLOW, R LED: GREEN (左黃右綠)

2-L LED: GREEN, R LED: YELLOW (左綠右黃)

PACKING TYPE (包裝):

R-BELL (卷帶包裝)

P-PVC TRAY (盤裝)

HEIGHT (高度):

5-SINK H=3.0 (沉板3.0)

COLOR (顏色):

1-BLACK (黑色)

PLASTIC (塑料):

4-LCP

GOLD PLATING (鍍金厚度):

1-11U", 2-1.5U", 3-2U", 4-3U",

5-15U", 6-30U", 7-50U"

X-SHUN 东莞市祥舜电子科技有限公司
DONGGUAN X-SHUN ELECTRONIC TECHNOLOGY CO., LTD

PART NO. RJ58D-8811-211415P

TITLE: RJ45 8P8C DIP SINK H=3.0 W/SHIELD W/LED

REV A0 DRAWING NO. RJ58D-88

GENERAL TOLERANCE

.X ±0.35 X.° ±2°

.XX ±0.25 .X.° ±1°

.XXX ±0.15 .XX.° ±0.5°

PROJECT



DRAWN

Gene Li

2017/08/11

CHECKE

LM

APPROVE

UNIT mm

SCALE 1:1

SHEET 1/1

REV A0

DRAWING NO.

RJ58D-88

REV ECN NO

DESCRIPTION

DATE

SIGNATURE

NEW DESIGN

2017/08/11

A0

REV ECN NO

DESCRIPTION

DATE

SIGNATURE