






RoHS compliant

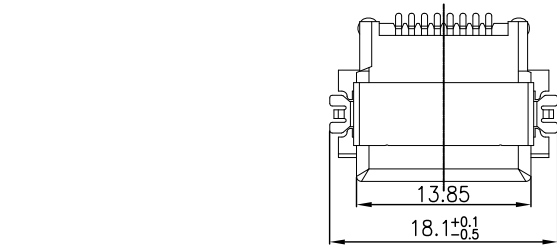

NOTES

MATERIAL

1. HOUSING MATERIAL : GLASS FILLED POLYESTER UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE T=0.3mm.
3. PLATING : GOLD FLASH PLATING OVER NICKEL.
4. SHIELD : 0.20mm THICKNESS COPPER ALLOY WITH NICKEL PLATED.

ELECTRICAL

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 40 MILLIOHMS MAX.
4. INSULATION RESISTANCE : 500 MEGOHMS MIN @ 100V DC .
5. DIELECTRIC DIELECTRIC RESISTANCE : 500V DC RMS 50Hz. 1MIN.

MECHANICAL

1. DURABILITY : 750 CYCLES MIN.
2. MATING/UNMATING FORCE : 2.24 KG. F MAX.

ENVIRONMENTAL:

1. STORAGE : -40°C ~ +85°C.
2. OPERATION : -40°C ~ +85°C.

P/N:RJ58S-8811-301214R

RJ45 SINK SMT SERIES PCB JACK

POSITIONS (金針位置):

8-POSITIONS (8P)

CONTACTS (金針根數):

8-CONTACTS (8C)

PORTS (窗口):

1=1X1

SHIELD (屏蔽壳):

3-MIDDLE SHIELD (屏蔽壳中包)

LED STYLE (LED 顏色類型):

1=Without LED (无LED)

PACKING TYPE (包裝):

R-BELL (卷帶包裝)

P-PVC TRAY (盤裝)

HEIGHT (沉板高度):

3-SINK H=5.5 (沉板4.2)

COLOR (顏色):

1-BLACK (黑色)

PLASTIC (塑料):



1-LCP; 2-PA9T

GOLD PLATING (鍍金厚度):

1=1U"; 2=1.5U"; 3=3U"; 4=6U";

5=15U"; 6=30U"; 7=50U";

8	///
7	///
6	RX-
5	///
4	///
3	RX+
2	TX-
1	TX+
PIN序 说明	

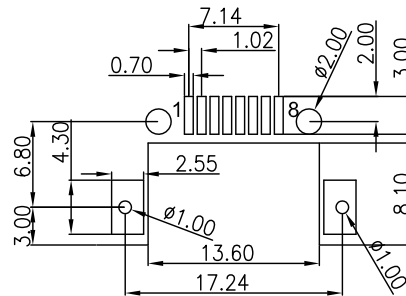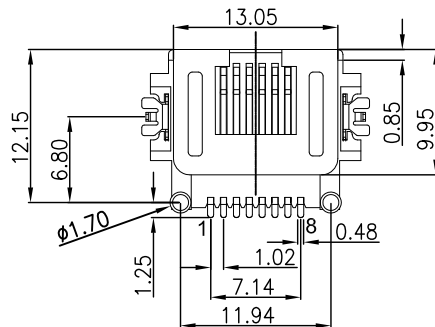

PCBLAYOUT TOP VIEW

TOL ±0.05

GENERAL TOLERANCE

DRAWN

Gene Li

2018/07/11

.X ±0.35 X.° ±2°

CHECKE


GM

.XX ±0.25 X.° ±1°

APPROVE

.XXX ±0.15 X.° ±0.5°

PROJECT



UNIT mm

SCALE 1:1

SHEET

X-SHUN 东莞市祥舜电子科技有限公司
DONGGUAN X-SHUN ELECTRONIC TECHNOLOGY CO., LTD

PART NO. RJ58S-8811-301214R

TITLE: RJ45 8P8C SMT SINK H=5.5MM W/SHIELD

REV

A0

DRAWING NO.

RJ58S-8804

A0

REV

1

2

3

4

5

6

7

8

A

A