




RoHS compliant



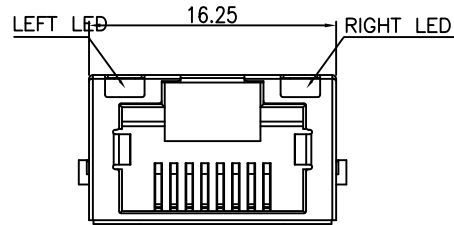


NOTES

- MATERIAL
1. HOUSING MATERIAL : LCP UL94V-0 BLACK.
2. CONTACT MATERIAL : PHOSPHOR BRONZE T=0.35mm.
3. PLATING : GOLD PLATING ON CONTACT, 100u" TIN PLATING ON SOLDER AREA, 30u" NICKEL OVER ALL.
4. SHIELD : SUS T=0.20mm WITH 50u" NICKEL PLATED.
- ELECTRICAL
1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 40 MILLIOHMS MAX.
4. INSULATION RESISTANCE : 500 MEGOHMS MIN @ 100V DC .
5. DIELECTRIC RESISTANCE : 500V DC RMS 50Hz. 1MIN.

- MECHANICAL
1. DURRABILITY : 750 CYCLES MIN.
2. MATING/UNMATING FORC: 2.24 KG.F MAX.

- ENVIRONMENTAL:
1. OPERATION : -40°C~+85°C.
2. STORAGE : -40°C~+85°C.

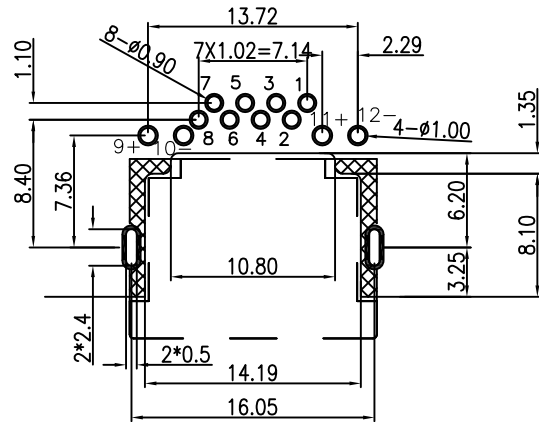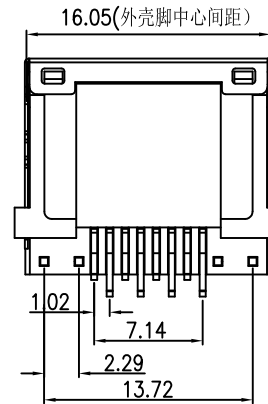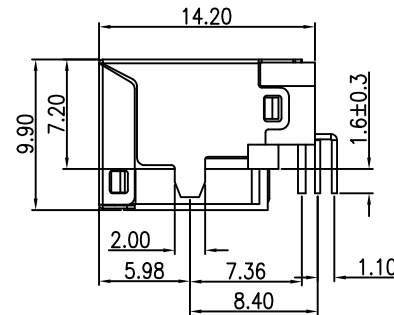

LED ELECTRICAL CHARACTERISTIC



Standard LED	Wavelength	Forward V (Min/Max)	Forward A	Type
Green	568nm	1.8v/2.8v	20mA	squareness
Yellow	585nm	1.8v/2.8v	20mA	squareness

P/N: RJ58D-8811-111414P

- RJ45 SINK DIP SERIES PCB JACK
POSITIONS (金針位置):
8-POSITIONS (8P)
CONTACTS (金針根數):
8-CONTACTS (8C)
PORTS (端口):
1(1-X)
SHIELD (屏蔽壳):
1-WITH SHIELD (有屏蔽壳)
LED STYLE (LED 顏色类型):
1-L LED-YELLOW, R LED-GREEN (左黃右綠)
2-L LED-GREEN, R LED-YELLOW (左綠右黃)
- PACKING TYPE (包裝):
R-BELL (卷帶包裝)
P-PVC TRAY (盒裝)
HEIGHT (沉板高度):
4-SINK H=7.2 (沉板7.2)
COLOR (顏色):
1-BLACK (黑色)
PLASTIC (塑料):
4-PC
GOLD PLATING (鍍金厚度):
1-10"; 2-1.50"; 3-30"; 4-60";
5-150"; 6-300"; 7-500";

				GENERAL TOLERANCE		DRAWN		Gene Li		2018/07/13		X-SHUN 东莞市祥舜电子科技有限公司 DONGGUAN X-SHUN ELECTRONIC TECHNOLOGY CO., LTD					
				.X	±0.35	X.°	± 2°	CHECKE								PART NO.	
A0		NEW DESIGN	2018/10/22		.XX	±0.25	X.°	± 1°	APPROVE				TITLE:		RJ45 8P8C DIP SINK H=7.2MM W/SHIELD W/LED		
REV	ECN NO	DESCRIPTION	DATE	SIGNATURE	PROJECT		UNIT		mm	SCALE	1:1	SHEET	1/1	REV	A0	DRAWING NO.	RJ58D-8804