
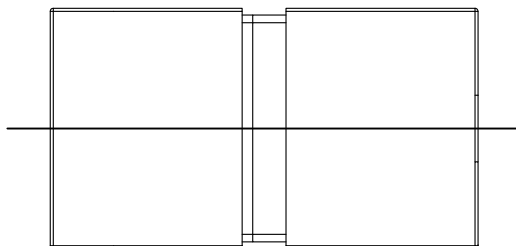

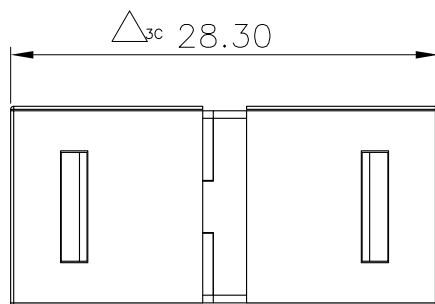
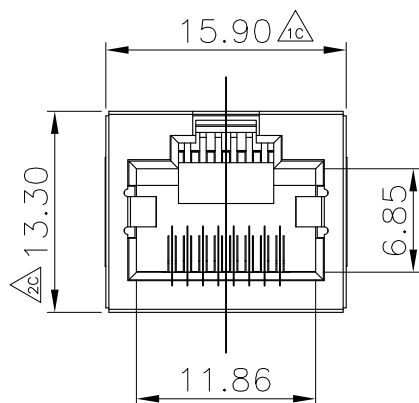


RoHS compliant

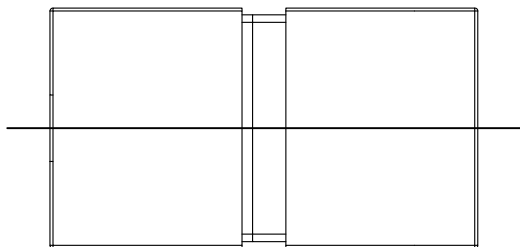

NOTES

MATERIAL

- 1.HOUSING : PBT UL94V-0
- 2.CONTACT : PHOSPHOR BRONZE T=0.35mm.
- 3.PLATING : CONTACT AREA-SELECTIVE GOLD PLATING OVER NICKEL.
- 4.SHIELD : STAINLESS STEEL

ELECTRICAL

- 1.VOLTAGE RATING : 125 VAC RMS.
- 2.CURRENT RATING : 1.5 AMP.
- 3.CONTACT RESISTANCE : 40 MILLIOHMS MAX.
- 4.INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500V DC .
- 5.DIELECTRIC RESISTANCE : 1000V AC RMS 50Hz. 1MIN.
- 6.DURABILITY : 750 CYCLES MIN.

ENVIRONMENTAL:

- 1.STORAGE : -40℃~+85℃.
- 2.OPERATION : -20℃~+75℃.

PART NO.	Gold Plating
5001-ZTB010-006E	6u"
5001-ZTB010-015E	15u"
5001-ZTB010-030E	30u"
5001-ZTB010-050E	50u"

					GENERAL TOLERANCE		DRAWN		Gene Li		2020/06/10		X-SHUN 东莞市祥舜电子科技有限公司 DONGGUAN X-SHUN ELECTRONIC TECHNOLOGY CO., LTD								
					. X	± 0.35	X. °	± 2°	CHECKED		Hb				PART NO. 5001-ZTB010-015E						
A0		NEW DESIGN		2020/06/10		. XX	± 0.25	X°	± 1°	APPROVE						TITLE: RJ45 8P8C MINI直通带屏蔽无椭圆孔 四面全包 两侧带边					
					. XXX	± 0.15	. XX°	± 0.5°													
REV	ECN NO	DESCRIPTION		DATE	SIGNATURE	PROJECT				UNIT	mm	SCALE	1:1	SHEET	1/1	REV	A0	DRAWING NO.	5001-015E		