
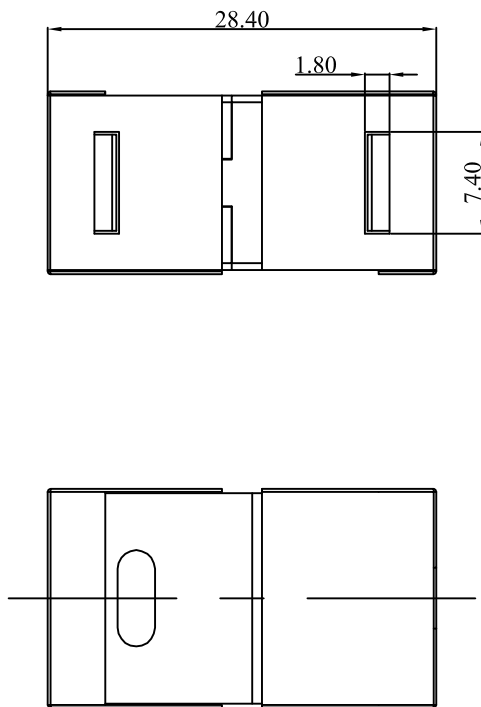

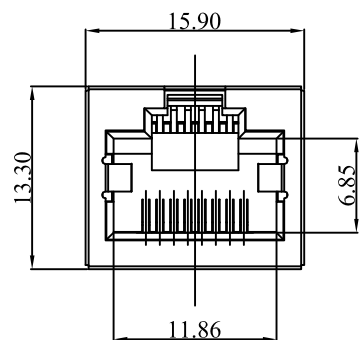


RoHS compliant

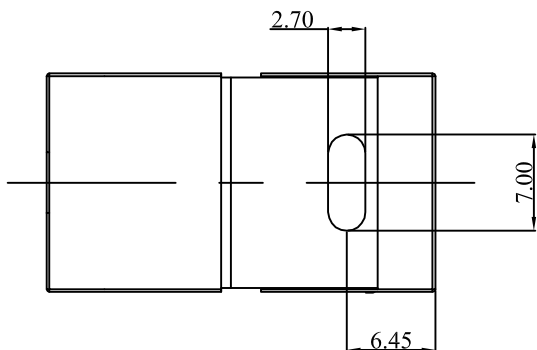

NOTES

MATERIAL

- 1.HOUSING : PBT UL94V-0
- 2.CONTACT : PHOSPHOR BRONZE T=0.3mm.
- 3.PLATING : CONTACT AREA-SELECTIVE GOLD PLATING, TAILS PLATING TIN OVER NICKEL.
- 4.SHIELD : 0.20mm THICKNESS COPPER ALLOY WITH NICKEL PLATED.

ELECTRICAL

- 1.VOLTAGE RATING : 125 VAC RMS.
- 2.CURRENT RATING : 1.5 AMP.
- 3.CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- 4.INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500V DC .
- 5.DIELECTRIC RESISTANCE : 1000V AC RMS 50Hz. 1MIN.

MECHANICAL

- 1.DURRABILITY : 750 CYCLES MIN.
- 2.PCB RETENTIONPRE-SOLDER : 1 LB MIN.

ENVIRONMENTAL:

- 1.STORAGE : -40℃ ~ +85℃.
- 2.OPERATION : -20℃ ~ +70℃.

PART NO.	Gold Plating
5001-US030-003E	6u"
5001-US030-005E	15u"
5001-US030-006E	30u"
5001-US030-007E	50u"

					GENERAL TOLERANCE		DRAWN		Gene Li		2019/12/08		X-SHUN 东莞市祥舜电子科技有限公司 DONGGUAN X-SHUN ELECTRONIC TECHNOLOGY CO., LTD					
					.X	±0.35	X.°	± 2°	CHECKE				PART NO.		5001-US030-005E			
A0		NEW DESIGN	2019/12/08		.XX	±0.25	.X°	± 1°	APPROVE				TITLE:		RJ45屏蔽直通模块, 侧面铜壳有扣位, 塑胶有椭圆孔			
					.XXX	±0.15	.XX°	± 0.5°										
REV	ECN NO	DESCRIPTION	DATE	SIGNATURE	PROJECT			UNIT		mm	SCALE	1:1	SHEET	1/1	REV	A0	DRAWING NO.	5001-030